SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 5810

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Sep-2023
Software Availability: Mar-2025

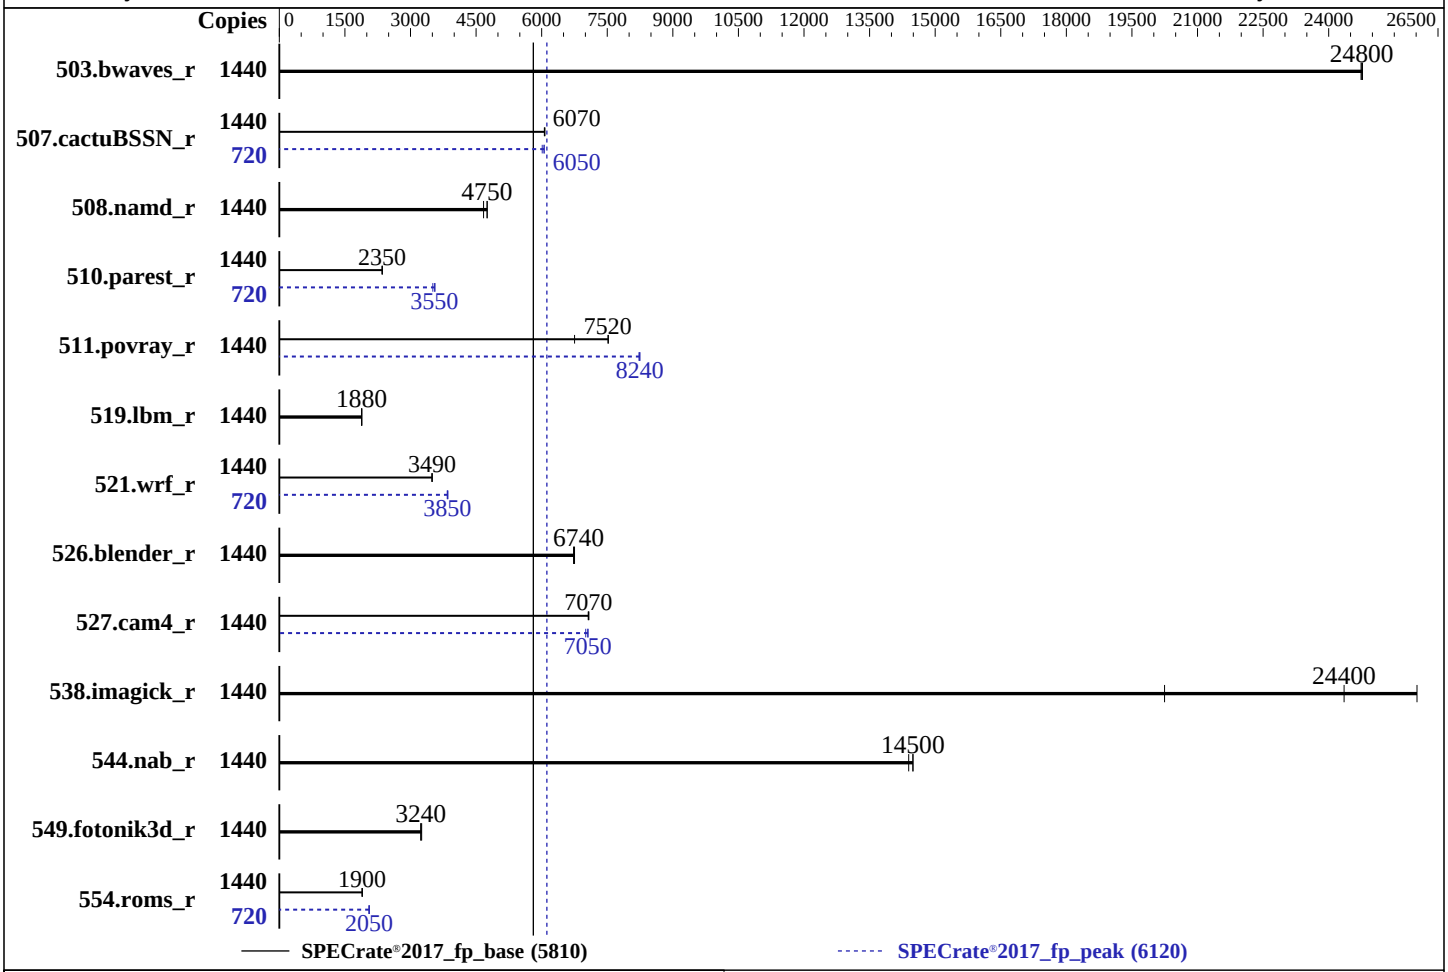

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	720 cores, 12 chips, 2 threads/core
Orderable:	4, 8, 12 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	6 TB (96 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 1.5 TB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.23.42-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	HPE Firmware Bundle Version 1.55.96 03/06/2025 released Mar-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 5810

SPECrate®2017_fp_peak = 6120

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Sep-2023
Software Availability: Mar-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	1440	584	24700	**583**	**24800**	583	24800	1440	584	24700	**583**	**24800**	583	24800
507.cactuBSSN_r	1440	**300**	**6070**	301	6060	300	6070	720	150	6060	**151**	**6050**	152	6010
508.namd_r	1440	293	4670	**288**	**4750**	288	4750	1440	293	4670	**288**	**4750**	288	4750
510.parest_r	1440	1603	2350	**1601**	**2350**	1598	2360	720	536	3510	529	3560	**530**	**3550**
511.povray_r	1440	447	7530	**447**	**7520**	498	6750	1440	409	8230	**408**	**8240**	408	8250
519.lbm_r	1440	**806**	**1880**	806	1880	805	1890	1440	**806**	**1880**	806	1880	805	1890
521.wrf_r	1440	924	3490	923	3490	**923**	**3490**	720	**419**	**3850**	418	3860	420	3840
526.blender_r	1440	**325**	**6740**	326	6730	325	6750	1440	**325**	**6740**	326	6730	325	6750
527.cam4_r	1440	356	7080	357	7060	**356**	**7070**	1440	**357**	**7050**	359	7010	357	7060
538.imagick_r	1440	138	26000	177	20200	**147**	**24400**	1440	138	26000	177	20200	**147**	**24400**
544.nab_r	1440	**167**	**14500**	168	14400	167	14500	1440	**167**	**14500**	168	14400	167	14500
549.fotonik3d_r	1440	1734	3240	1724	3260	**1733**	**3240**	1440	1734	3240	1724	3260	**1733**	**3240**
554.roms_r	1440	**1207**	**1900**	1207	1900	1208	1890	720	557	2050	557	2050	**557**	**2050**

SPECrate®2017_fp_base = 5810

SPECrate®2017_fp_peak = 6120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
 Workload Profile set to Custom
 Energy/Performance Bias set to Maximum Performance
 Energy Efficient Turbo set to Disabled
 Advanced Memory Protection set to Advanced ECC Support
 SR-IOV set to Disabled
 Intel Virtualization Technology (Intel VT, VT-x) set to Disabled
 Adjacent Sector Prefetch set to Disabled
 DCU Stream Prefetcher set to Disabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Memory Patrol Scrubbing set to Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on sph-187 Sat Mar 29 23:06:25 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux sph-187 6.4.0-150600.23.42-default #1 SMP PREEMPT_DYNAMIC Fri Mar  7 09:53:00 UTC 2025 (7bf6ecd)
```

(Continued on next page)

Platform Notes (Continued)

```
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   23:06:25 up 20:11,  1 user,  load average: 0.37, 0.29, 0.12
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  test     ttyS0    -                03:02   19:59m  0.12s  0.04s login -- test
  test     pts/0    -                03:06    6.00s  1.60s  0.08s sudo su

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 24377852
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 100000
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 24377852
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- test
 -bash
 sudo su
 sudo su
 su
 bash
 bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1440 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=720 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1440 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=720 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
```

(Continued on next page)

Platform Notes (Continued)

```
     stepping        : 6
     microcode       : 0x2b000639
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
     cpu cores       : 60
     siblings        : 120
     12 physical ids (chips)
     1440 processors (hardware threads)
     physical id 0: core ids 0-59
     physical id 1: core ids 0-59
     physical id 2: core ids 0-59
     physical id 3: core ids 0-59
     physical id 4: core ids 0-59
     physical id 5: core ids 0-59
     physical id 6: core ids 0-59
     physical id 7: core ids 0-59
     physical id 8: core ids 0-59
     physical id 9: core ids 0-59
     physical id 10: core ids 0-59
     physical id 11: core ids 0-59
     physical id 0: apicids 0-119
     physical id 1: apicids 128-247
     physical id 2: apicids 256-375
     physical id 3: apicids 384-503
     physical id 4: apicids 512-631
     physical id 5: apicids 640-759
     physical id 6: apicids 768-887
     physical id 7: apicids 896-1015
     physical id 8: apicids 1024-1143
     physical id 9: apicids 1152-1271
     physical id 10: apicids 1280-1399
     physical id 11: apicids 1408-1527
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               1440
   On-line CPU(s) list:                  0-1439
   Vendor ID:                            GenuineIntel
   Model name:                           Intel(R) Xeon(R) Platinum 8490H
   CPU family:                           6
   Model:                                143
   Thread(s) per core:                   2
   Core(s) per socket:                   60
   Socket(s):                            12
   Stepping:                             6
   CPU(s) scaling MHz:                   23%
   CPU max MHz:                          3500.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             3800.03
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
                                         xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor
```

(Continued on next page)

Platform Notes (Continued)

```
                                ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                                rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                                avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                                sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                hwp_act_window hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                                avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                                movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                                ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                arch_capabilities
  L1d cache:                    33.8 MiB (720 instances)
  L1i cache:                    22.5 MiB (720 instances)
  L2 cache:                     1.4 GiB (720 instances)
  L3 cache:                     1.3 GiB (12 instances)
  NUMA node(s):                 12
  NUMA node0 CPU(s):            0-59,720-779
  NUMA node1 CPU(s):            60-119,780-839
  NUMA node2 CPU(s):            120-179,840-899
  NUMA node3 CPU(s):            180-239,900-959
  NUMA node4 CPU(s):            240-299,960-1019
  NUMA node5 CPU(s):            300-359,1020-1079
  NUMA node6 CPU(s):            360-419,1080-1139
  NUMA node7 CPU(s):            420-479,1140-1199
  NUMA node8 CPU(s):            480-539,1200-1259
  NUMA node9 CPU(s):            540-599,1260-1319
  NUMA node10 CPU(s):           600-659,1320-1379
  NUMA node11 CPU(s):           660-719,1380-1439
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K    33.8M   12 Data            1     64        1             64
     L1i       32K    22.5M    8 Instruction     1     64        1             64
     L2         2M     1.4G   16 Unified         2   2048        1             64
     L3     112.5M     1.3G   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 12 nodes (0-11)
  node 0 cpus: 0-59,720-779
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 size: 506924 MB
   node 0 free: 504497 MB
   node 1 cpus: 60-119,780-839
   node 1 size: 508062 MB
   node 1 free: 506007 MB
   node 2 cpus: 120-179,840-899
   node 2 size: 508062 MB
   node 2 free: 506012 MB
   node 3 cpus: 180-239,900-959
   node 3 size: 508062 MB
   node 3 free: 506070 MB
   node 4 cpus: 240-299,960-1019
   node 4 size: 508062 MB
   node 4 free: 505838 MB
   node 5 cpus: 300-359,1020-1079
   node 5 size: 508062 MB
   node 5 free: 505852 MB
   node 6 cpus: 360-419,1080-1139
   node 6 size: 508062 MB
   node 6 free: 505820 MB
   node 7 cpus: 420-479,1140-1199
   node 7 size: 508062 MB
   node 7 free: 505804 MB
   node 8 cpus: 480-539,1200-1259
   node 8 size: 508062 MB
   node 8 free: 505616 MB
   node 9 cpus: 540-599,1260-1319
   node 9 size: 508024 MB
   node 9 free: 505408 MB
   node 10 cpus: 600-659,1320-1379
   node 10 size: 508062 MB
   node 10 free: 505335 MB
   node 11 cpus: 660-719,1380-1439
   node 11 size: 506986 MB
   node 11 free: 504644 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11
     0:  10  16  16  18  40  40  40  40  40  40  40  40
     1:  16  10  18  16  40  40  40  40  40  40  40  40
     2:  16  18  10  16  40  40  40  40  40  40  40  40
     3:  18  16  16  10  40  40  40  40  40  40  40  40
     4:  40  40  40  40  10  16  16  18  40  40  40  40
     5:  40  40  40  40  16  10  18  16  40  40  40  40
     6:  40  40  40  40  16  18  10  16  40  40  40  40
     7:  40  40  40  40  18  16  16  10  40  40  40  40
     8:  40  40  40  40  40  40  40  40  10  16  16  18
     9:  40  40  40  40  40  40  40  40  16  10  18  16
    10:  40  40  40  40  40  40  40  40  16  18  10  16
    11:  40  40  40  40  40  40  40  40  18  16  16  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       6240765740 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 29 02:57

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
```

(Continued on next page)

Platform Notes (Continued)

```
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                           LOAD   ACTIVE SUB    DESCRIPTION
  * dcdchkgracefulshutdown.service loaded failed failed Check if previous system shutdown was graceful
  * postfix.service                loaded failed failed Postfix Mail Transport Agent

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd
                   cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown
                   display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump
                   kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                   smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-fsck-root systemd-remount-fs
  disabled         accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd
                   clamonacc console-getty cups cups-browsed cxl-monitor dcdiag debug-shell ebtables
                   exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance
                   issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named
                   ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind
                   rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spampd
                   speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ winbind ypbind
  indirect         pcscd serial-getty@ systemd-userdbd tftp wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.42-default
  root=UUID=804ffac3-72bb-4ca7-bed1-4d64ea03e98a
  rd.auto=1
  console=ttyS0,115200n8
  selinux=0
  security=
  splash=silent
  mitigations=auto
  console=ttyS0,115200
  udev.children-max=512
  nmi_watchdog=0
  uv_nmi.action=kdump
  add_efi_memmap
  tsc=nowatchdog
  earlyprintk=ttyS0,115200
  log_buf_len=8M
  numa_balancing=disable
  crashkernel=1G,high
  watchdog_thresh=60
  workqueue.watchdog_thresh=120

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 547:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
```

(Continued on next page)

Platform Notes (Continued)

```
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              0
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release             SUSE Linux Enterprise Server 15 SP6
  hpe-foundation-release HPE Foundation Software 2.5.5, Build 753.1560.250305T0100.a.sles15sp6hpe-250305T0100

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme2n1p2 xfs   1.5T   38G  1.5T   3% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        Compute Scale-up Server 3200
    Product Family: 1590PID03030201
```

(Continued on next page)

Platform Notes (Continued)

```
     Serial:         5UF2491355-000

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     96x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      Bundle:1.55.96-20250319_050100 SFW:009.036.014.000.2503060426
    BIOS Date:         03/06/2025
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.2.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.2.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-30 00:06:24-0400.
Report generated on 2025-04-22 18:14:32 by CPU2017 PS formatter v6716.
Originally published on 2025-04-22.