



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857


Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

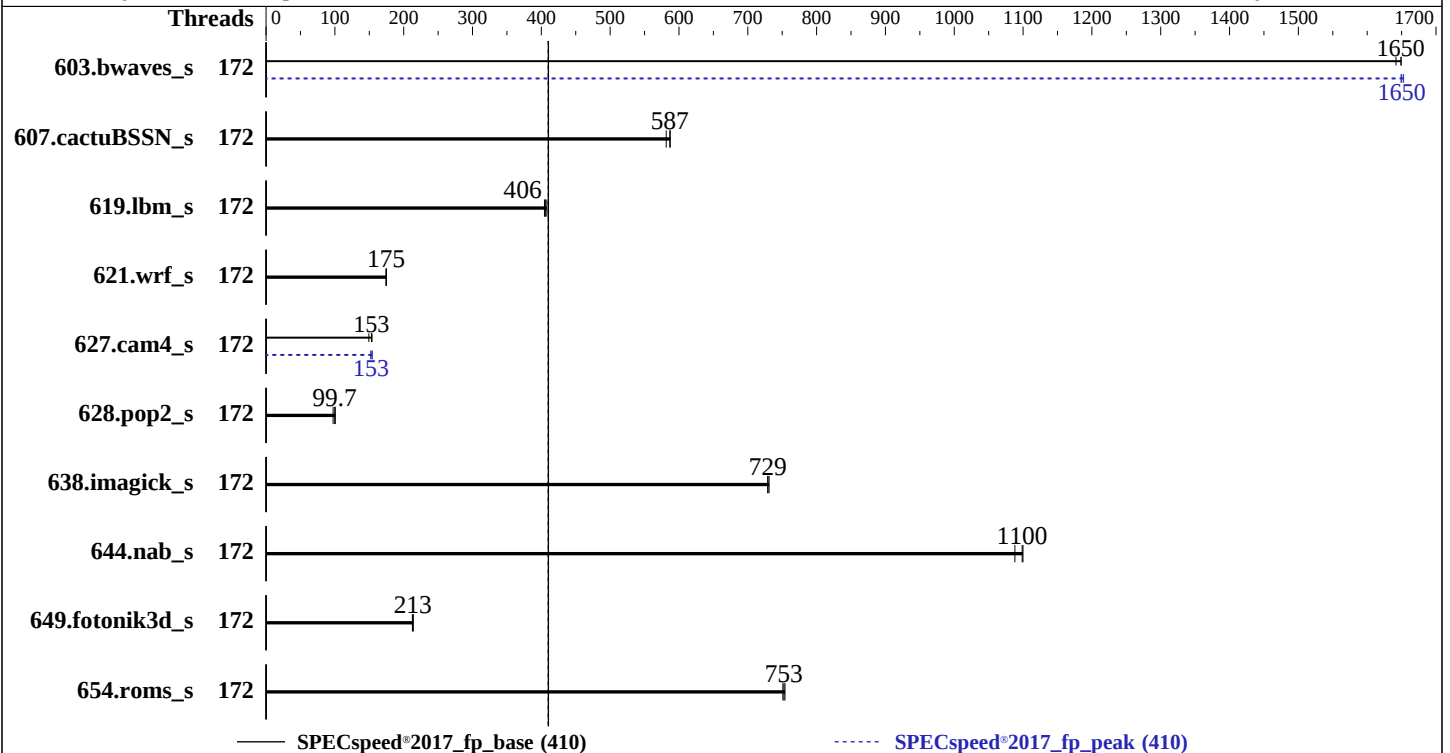

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips
Orderable: 2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1280 GB (8 x 64 GB 2Rx4 PC5-88/56B-M; 8 x 96 GB 2Rx4 PC5-88/56B-M, running at 8000)
Storage: 1 x 930 GB NVMe SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: American Megatrends version 02.40.00 released Mar-2025
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base						Peak					
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	172	<u>35.8</u>	<u>1650</u>	35.9	1640	35.8	1650	172	35.8	1650	<u>35.8</u>	<u>1650</u>
607.cactuBSSN_s	172	28.4	587	<u>28.4</u>	<u>587</u>	28.7	581	172	28.4	587	<u>28.4</u>	<u>587</u>
619.lbm_s	172	<u>12.9</u>	<u>406</u>	12.9	405	12.8	408	172	<u>12.9</u>	<u>406</u>	12.9	405
621.wrf_s	172	75.6	175	<u>75.7</u>	<u>175</u>	75.9	174	172	75.6	175	<u>75.7</u>	<u>175</u>
627.cam4_s	172	59.3	149	<u>57.8</u>	<u>153</u>	57.6	154	172	<u>58.1</u>	<u>153</u>	57.4	154
628.pop2_s	172	<u>119</u>	<u>99.7</u>	118	101	122	97.4	172	<u>119</u>	<u>99.7</u>	118	101
638.imagick_s	172	19.8	729	19.7	731	<u>19.8</u>	<u>729</u>	172	19.8	729	19.7	731
644.nab_s	172	15.9	1100	16.1	1090	<u>15.9</u>	<u>1100</u>	172	15.9	1100	16.1	1090
649.fotonik3d_s	172	42.6	214	42.9	213	<u>42.7</u>	<u>213</u>	172	42.6	214	42.9	213
654.roms_s	172	<u>20.9</u>	<u>753</u>	21.0	751	20.9	754	172	<u>20.9</u>	<u>753</u>	21.0	751

SPECSpeed®2017_fp_base = 410

SPECSpeed®2017_fp_peak = 410

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Enable LP [Global]	: Single LP
LLC Prefetch	: Enabled
Patrol Scrub	: Disable
Package C State	: No limit
Hardware P-States	: Disable
Latency Optimized Mode	: Enabled
Performance Mode	: Performance

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Power Performance Tuning : BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode : Performance
NUMA : Disable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Apr 15 22:27:21 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
22:27:21 up 3 min, 3 users, load average: 0.10, 0.15, 0.07
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 192.168.68.2 22:25 17.00s 0.01s 0.01s -bash
root pts/1 192.168.68.2 22:26 9.00s 0.93s 0.00s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
pending signals          (-i) 5158676
max locked memory        (kbytes, -l) 8192
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes        (-u) 5158676
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=172 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=172 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeak fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.032/templogs/preenv.fpspeed.032.0.log --lognum 032.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000380
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores       : 86
siblings        : 86
2 physical ids (chips)
172 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212
physical id 1: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,384,386,388,390,392,394,396,398,400,40
2,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454
,456,458,460,462,464,466,468
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	172
On-line CPU(s) list:	0-171
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6787P
BIOS Model name:	Intel(R) Xeon(R) 6787P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	1
Core(s) per socket:	86
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	105%
CPU max MHz:	2001.0000
CPU min MHz:	800.0000
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	8.1 MiB (172 instances)
L1i cache:	10.8 MiB (172 instances)
L2 cache:	344 MiB (172 instances)
L3 cache:	672 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-85
NUMA node1 CPU(s):	86-171
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-85
node 0 size: 773665 MB
node 0 free: 772310 MB
node 1 cpus: 86-171
node 1 size: 516033 MB
node 1 free: 514696 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 1320651048 kB

10. who -r

run-level 3 Apr 15 22:24

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-fs-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny systemd-remount-fs
enabled-runtime	accounts-daemon autofs autostart-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmiev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcher sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@
disabled	

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=4f1d54d4-b9e7-453e-97df-3582f1712553
splash=silent
quiet
security=apparmor
mitigations=auto
```

14. cpupower frequency-info

```
analyzing CPU 115:
  current policy: frequency should be within 800 MHz and 2.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance
```

16. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	btrfs	930G	208G	722G	23%	/home

21. /sys/devices/virtual/dmi/id

Vendor: COMPAL
Product: COMPAL SERVER
Product Family: COMPAL
Serial: 7890224900003

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

3x Micron MTC40F2046S1HC88XD1 WCCCC 64 GB 2 rank 8800, configured at 8000
1x Micron MTC40F2046S1HC88XD1 WFFFF 64 GB 2 rank 8800, configured at 8000
4x Micron MTC40F2046S1HC88XD1 XFFFF 64 GB 2 rank 8800, configured at 8000
8x Micron MTC40F204WS1HC88XB1 WCCCC 96 GB 2 rank 8800, configured at 8000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 02.40.00
BIOS Date: 03/06/2025
BIOS Revision: 5.35

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Compal Electronics, Inc.
SR230-2 (Intel Xeon 6787P)

SPECspeed®2017_fp_base = 410

SPECspeed®2017_fp_peak = 410

CPU2017 License: 6857

Test Sponsor: Compal Electronics, Inc.

Tested by: Compal Electronics, Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-Intel_v1.0.html

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Compal-Platform-Flags-Linux-Intel_v1.0.xml

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-15 10:27:20-0400.

Report generated on 2025-09-30 11:34:17 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-31.