# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4
(2.60 GHz, Intel Xeon 6521P)

SPECrate®2017_fp_base = 415

SPECrate®2017_fp_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** May-2025
**Hardware Availability:** May-2025
**Software Availability:** Jun-2024

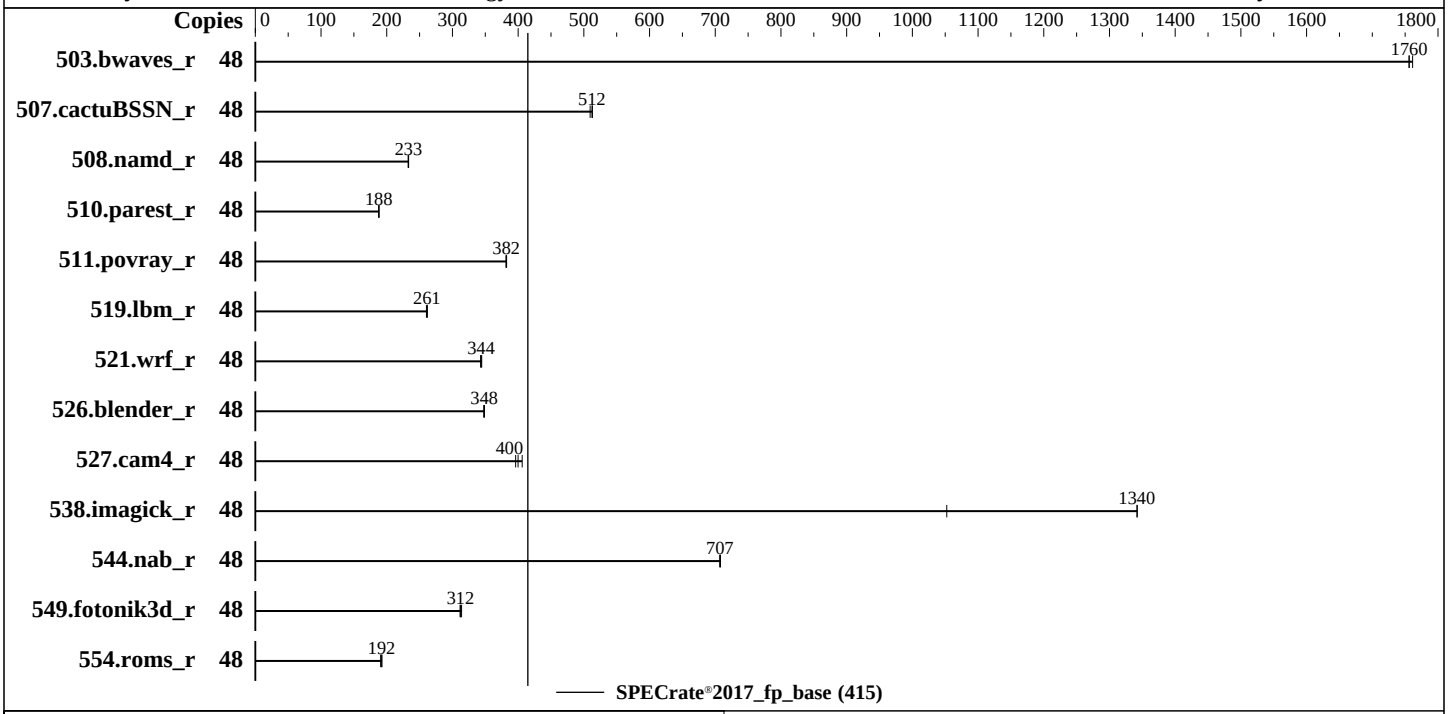


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6521P |
| Max MHz: | 4100 |
| Nominal: | 2600 |
| Enabled: | 24 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 64 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 144 MB I+D on chip per chip |
| Other: | None |
| Memory: | 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R) |
| Storage: | 1 x 960 GB NVME SSD |
| Other: | CPU Cooling: DLC |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6<br>Kernel 6.4.0-150600.21-default |
| Compiler: | C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2024.1 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version IHE109U 1.20 released Mar-2025 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | Not Applicable |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4
(2.60 GHz, Intel Xeon 6521P)

SPECrate®2017_fp_base = 415

SPECrate®2017_fp_peak = Not Run

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** May-2025
**Hardware Availability:** May-2025
**Software Availability:** Jun-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 48 | 273 | 1760 | 274 | 1760 | **274** | **1760** | | | | | | | |
| 507.cactuBSSN_r | 48 | **119** | **512** | 119 | 510 | 118 | 513 | | | | | | | |
| 508.namd_r | 48 | 195 | 233 | **196** | **233** | 196 | 233 | | | | | | | |
| 510.parest_r | 48 | **668** | **188** | 668 | 188 | 667 | 188 | | | | | | | |
| 511.povray_r | 48 | 293 | 382 | **293** | **382** | 294 | 382 | | | | | | | |
| 519.lbm_r | 48 | 194 | 260 | 193 | 262 | **194** | **261** | | | | | | | |
| 521.wrf_r | 48 | **313** | **344** | 314 | 343 | 312 | 345 | | | | | | | |
| 526.blender_r | 48 | 210 | 348 | 210 | 349 | **210** | **348** | | | | | | | |
| 527.cam4_r | 48 | 207 | 406 | **210** | **400** | 212 | 396 | | | | | | | |
| 538.imagick_r | 48 | 88.9 | 1340 | 113 | 1050 | **89.0** | **1340** | | | | | | | |
| 544.nab_r | 48 | 114 | 707 | 114 | 708 | **114** | **707** | | | | | | | |
| 549.fotonik3d_r | 48 | **599** | **312** | 600 | 312 | 596 | 314 | | | | | | | |
| 554.roms_r | 48 | 396 | 193 | **397** | **192** | 400 | 191 | | | | | | | |

**SPECrate®2017_fp_base = 415**

**SPECrate®2017_fp_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```

**(Continued on next page)**

## General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
SNC set to Enabled

 Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sat May 17 06:49:48 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    06:49:48 up 3 min,  1 user,  load average: 0.13, 0.09, 0.04
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

 ------------------------------------------------------------
```

(Continued on next page)

## Platform Notes (Continued)

```
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 1030046
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 1030046
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 sh Run503-compliant-ic2024.1-lin-sapphirerapids-ratefp-base-smt-on-20240308.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
   --define no-numa --tune base -o all --define drop_caches fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=24 --define physicalfirst
   --define no-numa --tune base --output_format all --define drop_caches --nopower --runmode rate --tune base
   --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.657/templogs/preenv.fprate.657.0.log --lognum 657.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6521P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0xa0000c0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 24
    siblings        : 48
    1 physical ids (chips)
    48 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 0: apicids 0-47
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
```

(Continued on next page)

## Platform Notes (Continued)

```
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   52 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          48
   On-line CPU(s) list:             0-47
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) 6521P
   BIOS Model name:                 Intel(R) Xeon(R) 6521P UNKNOWN CPU @ 2.6GHz
   BIOS CPU family:                 179
   CPU family:                      6
   Model:                           173
   Thread(s) per core:              2
   Core(s) per socket:              24
   Socket(s):                       1
   Stepping:                        1
   BogoMIPS:                        5200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                    pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                    nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                    pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                    xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                    tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                    3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                    ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                    vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                    rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                    clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                    arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                    vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                                    rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                    amx_int8 flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       1.1 MiB (24 instances)
   L1i cache:                       1.5 MiB (24 instances)
   L2 cache:                        48 MiB (24 instances)
   L3 cache:                        144 MiB (1 instance)
   NUMA node(s):                    1
   NUMA node0 CPU(s):               0-47
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                    PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
```

(Continued on next page)

## Platform Notes (Continued)

```
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     1.1M   12 Data            1     64        1             64
     L1i       64K     1.5M   16 Instruction     1     64        1             64
     L2         2M      48M   16 Unified         2   2048        1             64
     L3       144M     144M   16 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0-47
  node 0 size: 257538 MB
  node 0 free: 256653 MB
  node distances:
  node   0
    0:  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       263719020 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 17 06:46

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                   purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                   wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                   smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
  generated        ntp_sync
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=c5be0e33-36a7-4fb1-a8dd-78aa43a6d2d8
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 3:
    Unable to determine current policy
```

(Continued on next page)

## Platform Notes (Continued)

```
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              0
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   893G   49G  845G   6% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR630 V4
    Product Family: ThinkSystem
    Serial:         0987654321
```

(Continued on next page)

## Platform Notes (Continued)

```
 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     6x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400
     2x Samsung M321R4GA3PB2-CCPPC 32 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      IHE109U-1.20
    BIOS Date:         03/15/2025
    BIOS Revision:     1.20
    Firmware Revision: 1.20
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

**(Continued on next page)**

## Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2025-05-16 18:49:47-0400.
Report generated on 2025-06-03 15:45:43 by CPU2017 PS formatter v6716.
Originally published on 2025-06-03.