



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

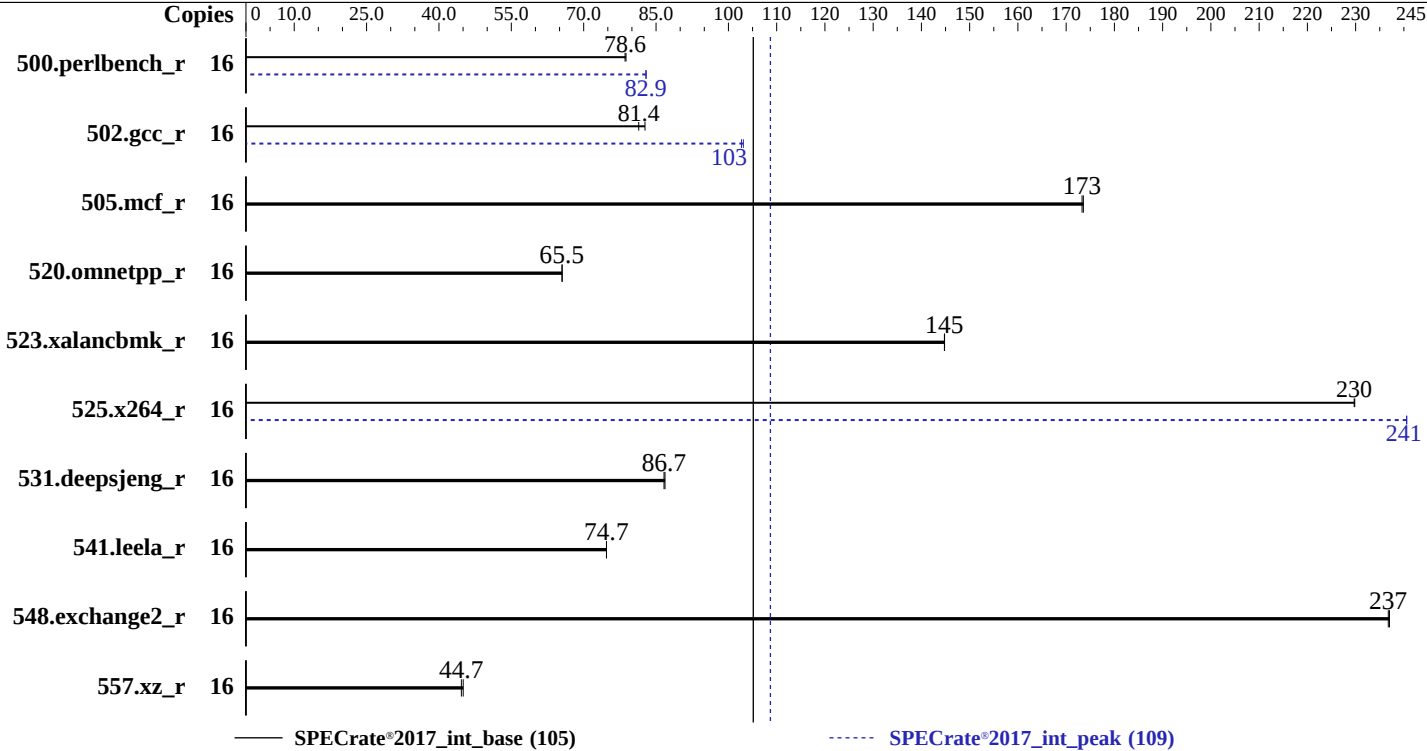

## Hardware

CPU Name: Intel Xeon 6507P  
Max MHz: 4300  
Nominal: 3500  
Enabled: 8 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 48 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)  
Storage: 40 GB on tmpfs  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
6.4.0-150600.21-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler  
for Linux;  
Parallel: No  
Firmware: Version 1.3.1 released Apr-2025  
File System: tmpfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of  
additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Results Table

| Benchmark       | Base   |            |             |            |             |         |       | Peak   |            |             |            |             |         |       |
|-----------------|--------|------------|-------------|------------|-------------|---------|-------|--------|------------|-------------|------------|-------------|---------|-------|
|                 | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds | Ratio | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds | Ratio |
| 500.perlbench_r | 16     | <b>324</b> | <b>78.6</b> | 323        | 78.8        |         |       | 16     | 307        | 83.0        | <b>307</b> | <b>82.9</b> |         |       |
| 502.gcc_r       | 16     | <b>278</b> | <b>81.4</b> | 274        | 82.7        |         |       | 16     | 220        | 103         | <b>221</b> | <b>103</b>  |         |       |
| 505.mcf_r       | 16     | 149        | 174         | <b>149</b> | <b>173</b>  |         |       | 16     | 149        | 174         | <b>149</b> | <b>173</b>  |         |       |
| 520.omnetpp_r   | 16     | <b>321</b> | <b>65.5</b> | 320        | 65.6        |         |       | 16     | <b>321</b> | <b>65.5</b> | 320        | 65.6        |         |       |
| 523.xalancbmk_r | 16     | 117        | 145         | <b>117</b> | <b>145</b>  |         |       | 16     | 117        | 145         | <b>117</b> | <b>145</b>  |         |       |
| 525.x264_r      | 16     | <b>122</b> | <b>230</b>  | 122        | 230         |         |       | 16     | <b>116</b> | <b>241</b>  | 116        | 241         |         |       |
| 531.deepsjeng_r | 16     | <b>212</b> | <b>86.7</b> | 211        | 86.9        |         |       | 16     | <b>212</b> | <b>86.7</b> | 211        | 86.9        |         |       |
| 541.leela_r     | 16     | 355        | 74.7        | <b>355</b> | <b>74.7</b> |         |       | 16     | 355        | 74.7        | <b>355</b> | <b>74.7</b> |         |       |
| 548.exchange2_r | 16     | <b>177</b> | <b>237</b>  | 177        | 237         |         |       | 16     | <b>177</b> | <b>237</b>  | 177        | 237         |         |       |
| 557.xz_r        | 16     | <b>387</b> | <b>44.7</b> | 384        | 45.0        |         |       | 16     | <b>387</b> | <b>44.7</b> | 384        | 45.0        |         |       |

SPECrate®2017\_int\_base = 105

SPECrate®2017\_int\_peak = 109

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

## Platform Notes

### BIOS Settings:

Virtual NUMA Nodes : 8  
Sub NUMA Cluster : Enabled  
Optimizer Mode : Enabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
Energy Efficient Turbo : Disabled  
C1E : Disabled  
C-States : Autonomous  
Latency Optimized Mode : Enabled  
Energy Efficient Policy : Performance  
CPU Interconnect Bus -  
Link Power Management : Disabled  
PCI ASPM L1 Link Power Management : Disabled  
DIMM Self Healing -  
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on 1234567-R470 Fri May 23 19:55:00 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

### 22. BIOS

```
1. uname -a
Linux 1234567-R470 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
19:55:00 up 3 min, 1 user, load average: 0.06, 0.07, 0.02
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -               19:51   36.00s  1.07s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.2a --output_format html, pdf, txt
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062510
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062510
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.2a --output_format
html, pdf, txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.2a --output_format
html, pdf, txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=8 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base, peak -o all --iterations 2 --define
DL-VERS=6.2a --output_format html, pdf, txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=16 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=8 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base, peak --output_format all --iterations 2
--define DL-VERS=6.2a --output_format html, pdf, txt --nopower --runmode rate --tune base: peak --size
refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log
--lognum 001.0 --from_runcpu 2
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6507P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x10003a5
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 8
siblings       : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0-15
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----
7. lscpu
```

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Vendor ID:             GenuineIntel
BIOS Vendor ID:        Intel
Model name:            Intel(R) Xeon(R) 6507P
BIOS Model name:       Intel(R) Xeon(R) 6507P  CPU @ 3.5GHz
BIOS CPU family:       179
CPU family:            6
Model:                 173
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             1
Stepping:              1
BogoMIPS:              7000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

```
Virtualization:
L1d cache:
L1i cache:
L2 cache:
L3 cache:
NUMA node(s):
NUMA node0 CPU(s):
NUMA node1 CPU(s):
NUMA node2 CPU(s):
NUMA node3 CPU(s):
NUMA node4 CPU(s):
NUMA node5 CPU(s):
NUMA node6 CPU(s):
NUMA node7 CPU(s):
Vulnerability Gather data sampling:
Vulnerability Itlb multihit:
Vulnerability L1tf:
Vulnerability Mds:
Vulnerability Meltdown:
Vulnerability Mmio stale data:
Vulnerability Reg file data sampling:
Vulnerability Retbleed:
Vulnerability Spec rstack overflow:
Vulnerability Spec store bypass:
Vulnerability Spectre v1:
Vulnerability Spectre v2:
Vulnerability Srbds:
Vulnerability Tsx async abort:

serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_l1d arch_capabilities
VT-x
384 KiB (8 instances)
512 KiB (8 instances)
16 MiB (8 instances)
48 MiB (1 instance)
8
0,8
5,13
3,11
6,14
7,15
1,9
2,10
4,12
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Not affected
Not affected
```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 384K     | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 64K      | 512K     | 16   | Instruction | 1     | 64    | 1        | 64             |
| L2   | 2M       | 16M      | 16   | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 48M      | 48M      | 16   | Unified     | 3     | 49152 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

```
node 0 cpus: 0,8
node 0 size: 64510 MB
node 0 free: 64223 MB
node 1 cpus: 5,13
node 1 size: 64511 MB
node 1 free: 53998 MB
node 2 cpus: 3,11
node 2 size: 64511 MB
node 2 free: 63851 MB
node 3 cpus: 6,14
node 3 size: 64511 MB
node 3 free: 64302 MB
node 4 cpus: 7,15
node 4 size: 64511 MB
node 4 free: 64233 MB
node 5 cpus: 1,9
node 5 size: 64426 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

node 5 free: 64188 MB  
node 6 cpus: 2,10  
node 6 size: 64478 MB  
node 6 free: 64193 MB  
node 7 cpus: 4,12  
node 7 size: 64196 MB  
node 7 free: 63932 MB

node distances:

| node | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  |
|------|----|----|----|----|----|----|----|----|
| 0:   | 10 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| 1:   | 20 | 10 | 20 | 20 | 20 | 20 | 20 | 20 |
| 2:   | 20 | 20 | 10 | 20 | 20 | 20 | 20 | 20 |
| 3:   | 20 | 20 | 20 | 10 | 20 | 20 | 20 | 20 |
| 4:   | 20 | 20 | 20 | 20 | 10 | 20 | 20 | 20 |
| 5:   | 20 | 20 | 20 | 20 | 20 | 10 | 20 | 20 |
| 6:   | 20 | 20 | 20 | 20 | 20 | 20 | 10 | 20 |
| 7:   | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 10 |

9. /proc/meminfo

MemTotal: 528032460 kB

10. who -r

run-level 3 May 23 19:51

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

| Default Target | Status  |
|----------------|---------|
| multi-user     | running |

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online<br>YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron<br>display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd<br>nvme-fc-boot-connections nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd<br>sshd systemd-pstore wpa_supplicant                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| enabled-runtime | systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| disabled        | accounts-daemon autofs autovast-initscripts blk-availability bluetooth-mesh boot-sysctl<br>ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq<br>ebtables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata<br>ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap<br>nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server rpcbind rpmconfigcheck<br>rsyncd rtkit-daemon serial-getty@ smartd-generate_opts smb snmpd snmptrapd<br>speech-dispatcherd systemd-boot-check-no-failures systemd-confext<br>systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2<br>update-system-flatpaks upower vncserver@ wickedd-wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6<br>wickedd-nanny wpa_supplicant@ |
| indirect        | pcscd systemd-userdbd wickedd                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=ab7dfb23-88fd-492a-bfd3-051bb26b233a  
splash=silent  
resume=/dev/disk/by-uuid/d2be8e78-3258-43c7-8640-62d816a6521d  
mitigations=auto  
quiet

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

security=apparmor

### 14. cpupower frequency-info

analyzing CPU 14:

Unable to determine current policy

boost state support:

Supported: yes

Active: yes

### 15. sysctl

|                              |       |
|------------------------------|-------|
| kernel.numa_balancing        | 1     |
| kernel.randomize_va_space    | 2     |
| vm.compaction_proactiveness  | 20    |
| vm.dirty_background_bytes    | 0     |
| vm.dirty_background_ratio    | 10    |
| vm.dirty_bytes               | 0     |
| vm.dirty_expire_centisecs    | 3000  |
| vm.dirty_ratio               | 20    |
| vm.dirty_writeback_centisecs | 500   |
| vm.dirtytime_expire_seconds  | 43200 |
| vm.extfrag_threshold         | 500   |
| vm.min_unmapped_ratio        | 1     |
| vm.nr_hugepages              | 0     |
| vm.nr_hugepages_mempolicy    | 0     |
| vm.nr_overcommit_hugepages   | 0     |
| vm.swappiness                | 60    |
| vm.watermark_boost_factor    | 15000 |
| vm.watermark_scale_factor    | 10    |
| vm.zone_reclaim_mode         | 0     |

### 16. /sys/kernel/mm/transparent\_hugepage

|                |                                              |
|----------------|----------------------------------------------|
| defrag         | always defer defer+madvice [madvice] never   |
| enabled        | [always] madvice never                       |
| hpage_pmd_size | 2097152                                      |
| shmem_enabled  | always within_size advise [never] deny force |

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

|                       |       |
|-----------------------|-------|
| alloc_sleep_millisecs | 60000 |
| defrag                | 1     |
| max_ptes_none         | 511   |
| max_ptes_shared       | 256   |
| max_ptes_swap         | 64    |
| pages_to_scan         | 4096  |
| scan_sleep_millisecs  | 10000 |

### 18. OS release

From /etc/\*-release /etc/\*-version

os-release SUSE Linux Enterprise Server 15 SP6

### 19. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

| Filesystem | Type  | Size | Used | Avail | Use% | Mounted on   |
|------------|-------|------|------|-------|------|--------------|
| tmpfs      | tmpfs | 40G  | 5.0G | 36G   | 13%  | /mnt/ramdisk |

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge R470  
Product Family: PowerEdge  
Serial: 1234567

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x 00CE042300CE M321R8GA0PB2-CCPEC 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.3.1  
BIOS Date: 04/24/2025  
BIOS Revision: 1.3

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

| 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====

Fortran | 548.exchange2\_r(base, peak)  
-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

## Peak Optimization Flags (Continued)

```
500.perlbench_r: -w -std=c11 -m64 -Wl, -z, muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89  
-Wl, -z, muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl, -z, muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 105

PowerEdge R470 (Intel Xeon 6507P)

SPECrate®2017\_int\_peak = 109

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-23 07:55:00-0400.

Report generated on 2025-07-16 11:04:55 by CPU2017 PDF formatter v6716.

Originally published on 2025-07-15.