



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHz

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

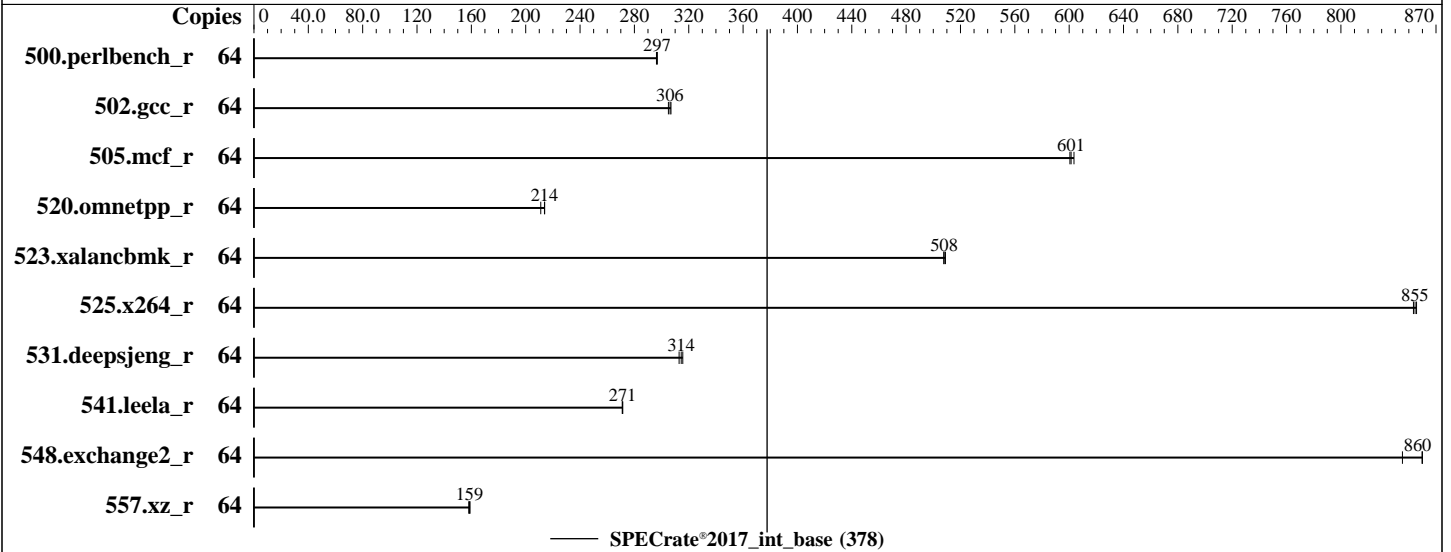

## Hardware

CPU Name: Intel Xeon 6731P  
 Max MHz: 4100  
 Nominal: 2500  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 144 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 1 x SSD PCIe M.2, 960GB  
 Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP7  
 6.4.0-150700.51-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Fsas Technologies Inc. BIOS Version V1.0.0.0  
 R1.1.0 for D4135-A1x. Released Oct-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHz

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	344	296	343	297	<b>343</b>	<b>297</b>							
502.gcc_r	64	<b>296</b>	<b>306</b>	295	307	297	305							
505.mcf_r	64	172	601	171	604	<b>172</b>	<b>601</b>							
520.omnetpp_r	64	398	211	392	214	<b>393</b>	<b>214</b>							
523.xalancbmk_r	64	133	509	133	508	<b>133</b>	<b>508</b>							
525.x264_r	64	131	856	<b>131</b>	<b>855</b>	131	853							
531.deepsjeng_r	64	234	313	232	316	<b>233</b>	<b>314</b>							
541.leela_r	64	390	271	391	271	<b>391</b>	<b>271</b>							
548.exchange2_r	64	<b>195</b>	<b>860</b>	195	860	198	845							
557.xz_r	64	<b>436</b>	<b>159</b>	437	158	435	159							

SPECrate®2017\_int\_base = 378

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/Benchmark/cpu2017/lib/intel64:/home/Benchmark/cpu2017/lib/ia32:/home/Benchmark/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHz

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fsas Technologies Inc.

**Test Date:** Sep-2025

**Hardware Availability:** Oct-2025

**Software Availability:** Jun-2025

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Fan Control = Full

CPU Performance Boost = Aggressive

APS rocketing = Enabled

Sysinfo program /home/Benchmark/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Sep 24 19:31:58 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT\_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
19:31:58 up 1 min, 1 user, load average: 0.17, 0.11, 0.04  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 19:31 14.00s 0.93s 0.07s -bash

-----

3. Username  
From environment variable \$USER: root

-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHz

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fsas Technologies Inc.

**Test Date:** Sep-2025

**Hardware Availability:** Oct-2025

**Software Availability:** Jun-2025

## Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size                (blocks, -f) unlimited
   pending signals         (-i) 1029442
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                 (seconds, -t) unlimited
   max user processes      (-u) 1029442
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   login -- root
   -bash
   -bash
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
     ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base -o all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
     ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
     rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/Benchmark/cpu2017

```

```

-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6731P
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 173
   stepping       : 1
   microcode      : 0xa0000f2
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
   cpu cores      : 32
   siblings       : 64
   1 physical ids (chips)
   64 processors (hardware threads)
   physical id 0: core ids 0-31
   physical id 0: apicids 0-63
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.40.4:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHZ

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fsas Technologies Inc.

**Test Date:** Sep-2025

**Hardware Availability:** Oct-2025

**Software Availability:** Jun-2025

## Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    64
On-line CPU(s) list:      0-63
Vendor ID:                 GenuineIntel
Model name:                Intel(R) Xeon(R) 6731P
CPU family:                6
Model:                     173
Thread(s) per core:       2
Core(s) per socket:       32
Socket(s):                 1
Stepping:                  1
CPU(s) scaling MHz:       25%
CPU max MHz:               4100.0000
CPU min MHz:               800.0000
BogoMIPS:                  5000.00
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                           pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                           pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                           nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                           pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                           xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                           tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                           3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                           ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                           vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                           rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                           intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                           xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                           split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                           arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnni
                           avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                           avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                           bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                           serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                           amx_int8 flush_lld arch_capabilities
Virtualization:           VT-x
L1d cache:                1.5 MiB (32 instances)
L1i cache:                2 MiB (32 instances)
L2 cache:                  64 MiB (32 instances)
L3 cache:                  144 MiB (1 instance)
NUMA node(s):             1
NUMA node0 CPU(s):        0-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                           PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:  
 NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHZ

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fsas Technologies Inc.

**Test Date:** Sep-2025

**Hardware Availability:** Oct-2025

**Software Availability:** Jun-2025

## Platform Notes (Continued)

L1d	48K	1.5M	12 Data	1	64	1	64
L1i	64K	2M	16 Instruction	1	64	1	64
L2	2M	64M	16 Unified	2	2048	1	64
L3	144M	144M	16 Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-63
node 0 size: 257387 MB
node 0 free: 256480 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 263564828 kB

10. who -r

run-level 3 Sep 24 19:30

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmmf-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd
vncserver@
indirect systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=90732971-989d-4632-82bc-39689e893398
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 11:
current policy: frequency should be within 800 MHz and 4.10 GHz.
The governor "powersave" may decide which speed to use

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

SPECrate®2017\_int\_peak = Not Run

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHz

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fsas Technologies Inc.

**Test Date:** Sep-2025

**Hardware Availability:** Oct-2025

**Software Availability:** Jun-2025

## Platform Notes (Continued)

within this range.

boost state support:

Supported: yes

Active: yes

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

-----
19. Disk information
SPEC is set to: /home/Benchmark/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3 xfs  911G  43G  869G  5% /home

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Fsas Technologies
Product:     PRIMERGY RX2540 M8
Product Family: SERVER

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHz

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

## Platform Notes (Continued)

Serial: xxxxxxxxxxxx

### 21. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Samsung M321R4GA3EB2-CCPKF 32 GB 2 rank 6400

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Fsas Technologies  
BIOS Version: V1.0.0.0 R1.1.0 for D4135-A1x  
BIOS Date: 09/05/2025  
BIOS Revision: 1.1  
Firmware Revision: 3.1

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fsas Technologies Inc.**

(Test Sponsor: Fujitsu)

SPECrate®2017\_int\_base = 378

SPECrate®2017\_int\_peak = Not Run

PRIMERGY RX2540 M8, Intel Xeon 6731P, 2.50GHZ

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fsas Technologies Inc.

**Test Date:** Sep-2025

**Hardware Availability:** Oct-2025

**Software Availability:** Jun-2025

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fsas-Platform-Settings-V1.0-GNR-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fsas-Platform-Settings-V1.0-GNR-RevA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-24 06:31:57-0400.

Report generated on 2025-10-21 18:46:57 by CPU2017 PDF formatter v6716.

Originally published on 2025-10-21.