



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061


Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

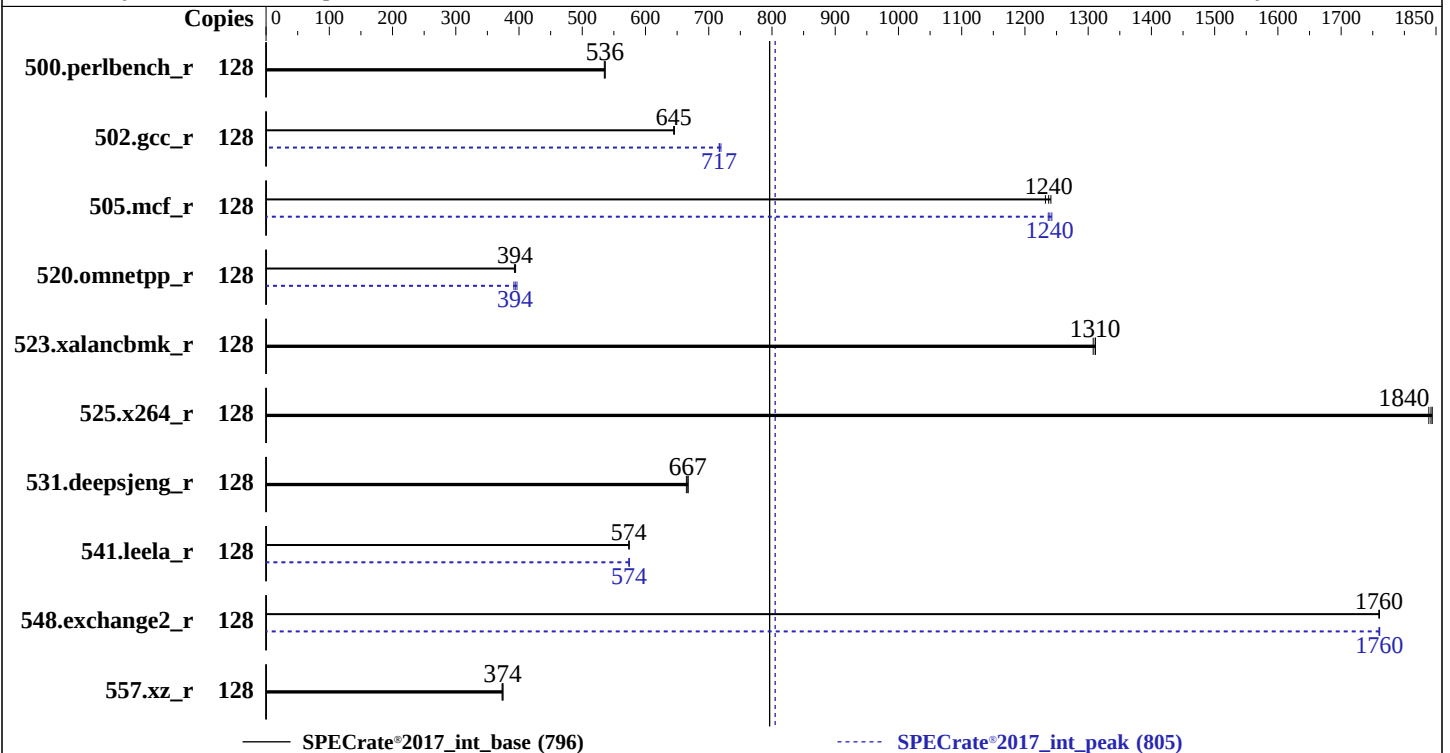

Hardware

CPU Name: AMD EPYC 9354
Max MHz: 3800
Nominal: 3250
Enabled: 64 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-5600B-R, running at 4800)
Storage: 1 x 1.92 TB SATA SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel version 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 24.25.01.20 released Mar-2025
File System: btrfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	380	536	381	535	380	536	128	380	536	381	535	380	536
502.gcc_r	128	281	646	281	645	281	645	128	253	717	252	719	253	717
505.mcf_r	128	168	1230	167	1240	167	1240	128	166	1240	167	1240	167	1240
520.omnetpp_r	128	428	393	427	394	426	395	128	423	397	426	394	429	392
523.xalancbmk_r	128	103	1310	103	1310	103	1310	128	103	1310	103	1310	103	1310
525.x264_r	128	122	1840	122	1840	122	1840	128	122	1840	122	1840	122	1840
531.deepsjeng_r	128	220	667	220	667	221	665	128	220	667	220	667	221	665
541.leela_r	128	369	574	369	574	369	574	128	369	574	369	574	369	574
548.exchange2_r	128	190	1760	191	1760	191	1760	128	191	1760	190	1760	190	1760
557.xz_r	128	370	373	369	374	369	375	128	370	373	369	374	369	375

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

OS set to performance mode via cpupower frequency-set -g performance
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Determinism Control= Manual

Determinism Enable = Power

TDP Control = Manual

TDP = 300

PPT Control = Manual

PPT = 300

NUMA nodes per socket = NPS4

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu Jul 24 15:57:01 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024
(36c1e09/lp) x86_64 x86_64 x86_64 GNU/Linux

2. w
15:57:02 up 1:56, 4 users, load average: 17.48, 84.85, 105.47
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root : 14:01 ?xdm? 2:47 0.02s gdm-session-worker [pam/gdm-password]
root seat0 login- 14:01 0.00s 0.00s 0.01s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root :1 14:01 ?xdm? 2:47 0.01s /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root pts/1 192.2.211.171 14:03 21.00s 1.29s 0.18s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
root pts/2 192.2.211.171 14:03 1:53m 0.03s 0.03s -bash
root pts/3 192.2.211.171 14:03 1:53m 0.03s 0.03s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3092758
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3092758
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/1
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Platform Notes (Continued)

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

```
model name      : AMD EPYC 9354 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101154
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0:  apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1:  apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9354 32-Core Processor
BIOS Model name:	AMD EPYC 9354 32-Core Processor
BIOS CPU family:	107
CPU family:	25
Model:	17
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	86%
CPU max MHz:	3799.0720
CPU min MHz:	1500.0000
BogoMIPS:	6500.13
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec

Unknown CPU @ 3.2GHz

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Virtualization:

L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 64 MiB (64 instances)
L3 cache: 512 MiB (16 instances)

NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSE-IBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 96379 MB
node 0 free: 95532 MB
node 1 cpus: 8-15,72-79
node 1 size: 96763 MB
node 1 free: 96024 MB
node 2 cpus: 16-23,80-87
node 2 size: 96763 MB
node 2 free: 95968 MB
node 3 cpus: 24-31,88-95
node 3 size: 96763 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
node 3 free: 96017 MB
node 4 cpus: 32-39,96-103
node 4 size: 96763 MB
node 4 free: 96050 MB
node 5 cpus: 40-47,104-111
node 5 size: 96763 MB
node 5 free: 96046 MB
node 6 cpus: 48-55,112-119
node 6 size: 96725 MB
node 6 free: 95156 MB
node 7 cpus: 56-63,120-127
node 7 size: 96297 MB
node 7 free: 95397 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  12  12  12  32  32  32  32
1:  12  10  12  12  32  32  32  32
2:  12  12  10  12  32  32  32  32
3:  12  12  12  10  32  32  32  32
4:  32  32  32  32  10  12  12  12
5:  32  32  32  32  12  10  12  12
6:  32  32  32  32  12  12  10  12
7:  32  32  32  32  12  12  12  10
```

```
-----
9. /proc/meminfo
MemTotal:      791777368 kB
```

```
-----
10. who -r
run-level 5 Jul 24 14:01
```

```
-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target    Status
graphical         degraded
```

```
-----
12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online
```

```
-----
13. Services, from systemctl list-unit-files
STATE    UNIT FILES
enabled  ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early
kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
wpa_supplicant
enabled-runtime systemd-remount-fs
disabled  accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell
dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once
haveged hwloc-dump-hwdata ipmi ipmiev issue-add-ssh-keys kexec-load ksm kvm_stat lunmask
man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck
rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
speech-dispatcherd systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Platform Notes (Continued)

indirect update-system-flatpaks upower vncserver@ wpa_supplicant@
pcscd saned@ systemd-userdbd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=7c3ac619-5ee3-4c6e-b00d-953edae17ac4
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=383M,high
crashkernel=72M,low

15. cpupower frequency-info
analyzing CPU 113:
current policy: frequency should be within 1.50 GHz and 3.25 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Jul-2025
Hardware Availability: Feb-2024
Software Availability: Oct-2024

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 btrfs 1.0T 16G 1008G 2% /home

21. /sys/devices/virtual/dmi/id
Vendor: ZTE
Product: R5350 G5
Product Family: Server
Serial: 219636449835

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
24x Samsung M321R4GA3PB0-CWMXJ 32 GB 2 rank 5600, configured at 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends Inc.
BIOS Version: 24.25.01.20
BIOS Date: 03/30/2025
BIOS Revision: 24.25

Compiler Version Notes

=====

C	502.gcc_r(peak)
---	-----------------

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C	500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
	557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5350G5 Server System
(3.25 GHz, AMD EPYC 9354)

SPECrate®2017_int_base = 796

SPECrate®2017_int_peak = 805

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Jul-2025

Hardware Availability: Feb-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

541.leela_r (continued):

-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-AMD-V3.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-AMD-V3.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-24 03:57:01-0400.

Report generated on 2025-11-05 12:08:58 by CPU2017 PDF formatter v6716.

Originally published on 2025-11-04.