



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

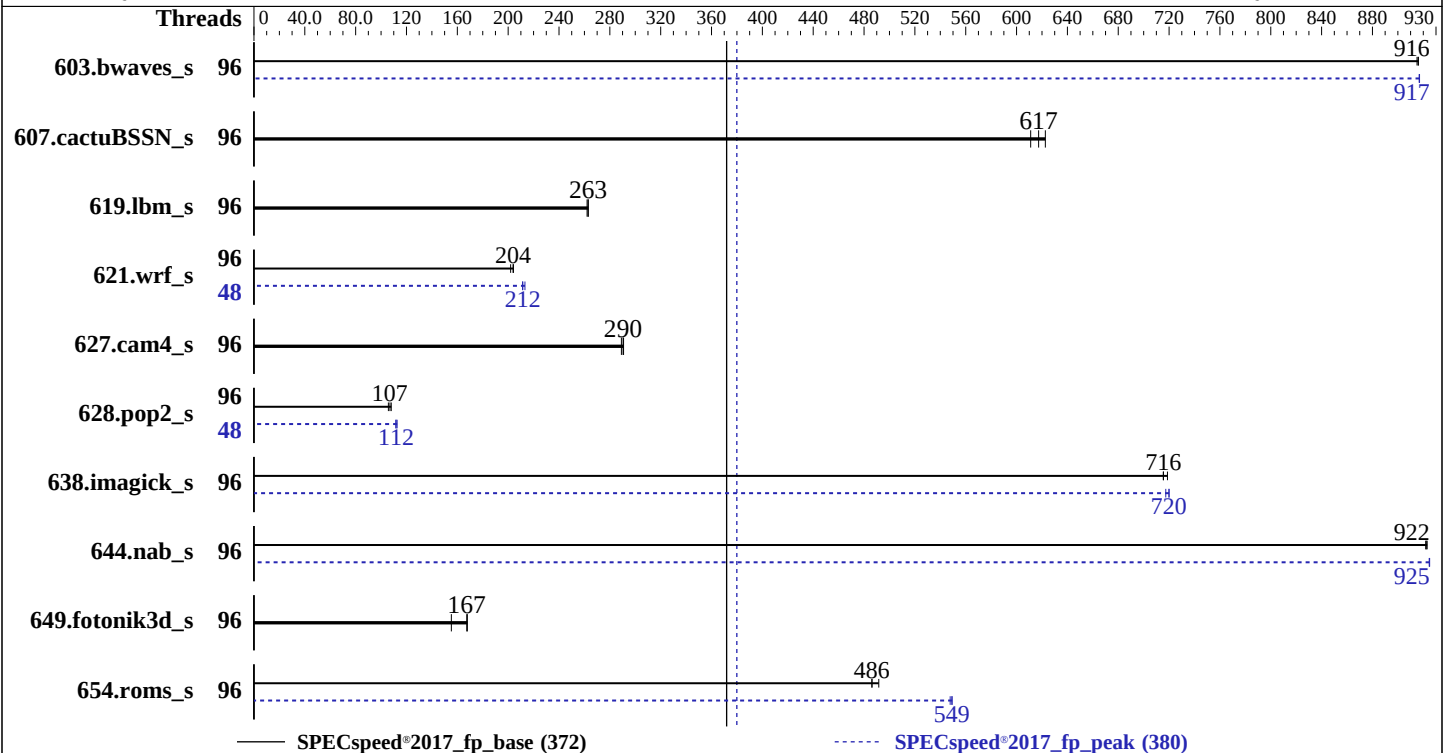

Hardware

CPU Name: AMD EPYC 9655P
Max MHz: 4500
Nominal: 2600
Enabled: 96 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 1.92 TB 64G NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: ext4
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	64.5	915	64.4	916	64.4	916	96	64.4	917	64.3	917	64.3	917
607.cactuBSSN_s	96	27.0	617	27.3	611	26.8	623	96	27.0	617	27.3	611	26.8	623
619.lbm_s	96	19.9	263	19.9	263	20.0	262	96	19.9	263	19.9	263	20.0	262
621.wrf_s	96	65.5	202	64.9	204	64.8	204	48	62.6	211	62.5	212	62.0	213
627.cam4_s	96	30.7	289	30.5	290	30.5	291	96	30.7	289	30.5	290	30.5	291
628.pop2_s	96	110	108	112	106	111	107	48	106	112	105	113	106	112
638.imagick_s	96	20.2	716	20.2	715	20.1	719	96	20.0	720	20.0	720	20.1	717
644.nab_s	96	18.9	923	19.0	922	18.9	922	96	18.9	925	18.9	925	18.9	925
649.fotonik3d_s	96	58.7	155	54.3	168	54.4	167	96	58.7	155	54.3	168	54.4	167
654.roms_s	96	32.4	486	32.4	486	32.0	492	96	28.7	548	28.7	549	28.7	549

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-191"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 603.bwaves_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:

GOMP_CPU_AFFINITY =

"0,96,1,97,2,98,3,99,4,100,5,101,6,102,7,103,8,104,9,105,10,106,11,107,12,108,13,109,14,110,15,111,16,112,17,113,18,114,19,115,20,116,21,117,22,118,23,119"

Environment variables set by runcpu during the 628.pop2_s peak run:

GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 638.imagick_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on r15-bm-02 Sat Aug 30 22:21:15 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux r15-bm-02 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w
22:21:15 up 7:20, 5 users, load average: 7.89, 7.62, 4.53
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/1 10.79.30.182:S.0 19:49 2:31m 0.97s 0.27s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094447
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3094447
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize=42

SCREEN -S cpu

/bin/bash

python3 ./run_intspeed.py

/bin/bash ./amd_speed_aocc500_znver5_A1.sh

runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed

runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower

--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.045/temlogs/preenv.fpspeed.045.0.log --lognum 045.0 --from_runcpu 2

specperl \$SPEC/bin/sysinfo

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

model name : AMD EPYC 9655P 96-Core Processor
vendor_id : AuthenticAMD
cpu family : 26
model : 2
stepping : 1
microcode : 0xb002151
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size : 192 4K pages
cpu cores : 96
siblings : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-95
physical id 0: apicids 0-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9655P 96-Core Processor
CPU family: 26
Model: 2
Thread(s) per core: 2
Core(s) per socket: 96
Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU(s) scaling MHz: 103%

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

CPU max MHz: 2600.0000
CPU min MHz: 1500.0000
BogoMIPS: 5199.87
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect flush_l1d debug_swap

L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 12
NUMA node0 CPU(s): 0-7,96-103
NUMA node1 CPU(s): 8-15,104-111
NUMA node2 CPU(s): 16-23,112-119
NUMA node3 CPU(s): 24-31,120-127
NUMA node4 CPU(s): 32-39,128-135
NUMA node5 CPU(s): 40-47,136-143
NUMA node6 CPU(s): 48-55,144-151
NUMA node7 CPU(s): 56-63,152-159
NUMA node8 CPU(s): 64-71,160-167
NUMA node9 CPU(s): 72-79,168-175
NUMA node10 CPU(s): 80-87,176-183
NUMA node11 CPU(s): 88-95,184-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

L2	1M	96M	16 Unified	2 1024	1	64
L3	32M	384M	16 Unified	3 32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 12 nodes (0-11)
node 0 cpus: 0-7,96-103
node 0 size: 64152 MB
node 0 free: 63801 MB
node 1 cpus: 8-15,104-111
node 1 size: 64507 MB
node 1 free: 64329 MB
node 2 cpus: 16-23,112-119
node 2 size: 64507 MB
node 2 free: 64325 MB
node 3 cpus: 24-31,120-127
node 3 size: 64507 MB
node 3 free: 64279 MB
node 4 cpus: 32-39,128-135
node 4 size: 64507 MB
node 4 free: 64196 MB
node 5 cpus: 40-47,136-143
node 5 size: 64507 MB
node 5 free: 64319 MB
node 6 cpus: 48-55,144-151
node 6 size: 64507 MB
node 6 free: 64147 MB
node 7 cpus: 56-63,152-159
node 7 size: 64507 MB
node 7 free: 64246 MB
node 8 cpus: 64-71,160-167
node 8 size: 64413 MB
node 8 free: 64205 MB
node 9 cpus: 72-79,168-175
node 9 size: 64507 MB
node 9 free: 63875 MB
node 10 cpus: 80-87,176-183
node 10 size: 64507 MB
node 10 free: 64296 MB
node 11 cpus: 88-95,184-191
node 11 size: 64507 MB
node 11 free: 64042 MB
```

node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11
0:	10	11	11	11	11	11	12	12	12	12	12	12
1:	11	10	11	11	11	11	12	12	12	12	12	12
2:	11	11	10	11	11	11	12	12	12	12	12	12
3:	11	11	11	10	11	11	12	12	12	12	12	12
4:	11	11	11	11	10	11	12	12	12	12	12	12
5:	11	11	11	11	11	10	12	12	12	12	12	12
6:	12	12	12	12	12	12	10	11	11	11	11	11
7:	12	12	12	12	12	12	11	10	11	11	11	11
8:	12	12	12	12	12	12	11	11	10	11	11	11
9:	12	12	12	12	12	12	11	11	11	10	11	11
10:	12	12	12	12	12	12	11	11	11	11	10	11
11:	12	12	12	12	12	12	11	11	11	11	11	10

9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

MemTotal: 792210040 kB

10. who -r
run-level 5 Aug 30 15:01

11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* yast-timesync.service loaded failed failed One time sync configured by YaST

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
bluetooth chronyd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings
klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect oracle postfix
purge-kernels rollback rsyslog sapconf smartd sshd systemctl-logger systemd-pstore virtqemu
virtxend wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
xencommons
enabled-runtime systemd-fsck-root systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait clamav-milter
clamd clamonnacc console-getty corosync corosync-notifyd crm_mon ctdb cups cups-browsed
ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
drbd-lvchange@ drbd-wait-promotable@ ebttables exchange-bmc-os-info fetchmail firewalld
fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievdp ipvsadm iscsi-init iscsid
isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
nfs-server nfs-server@ nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spamd
speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan strongswan-starter
svsnerve sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcshd udisks2
update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodeudev
virtwfilterd virtsecret virtstoraged vncserver@ vsftpd wdm winbind wpa_supplicant@
xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsole
xendomains xenstored zebra
indirect pcsd saned@ systemd-userdbd tftpd uidd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=566b550a-b4e8-48d0-9bfc-e3063e24f965
splash=silent
mitigations=auto
quiet
security=apparmor

15. cpupower frequency-info
analyzing CPU 131:
current policy: frequency should be within 1.50 GHz and 2.60 GHz.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

```
-----
16. sysctl
   kernel.numa_balancing          0
   kernel.randomize_va_space      0
   vm.compaction_proactiveness    20
   vm.dirty_background_bytes      314572800
   vm.dirty_background_ratio      0
   vm.dirty_bytes                 0
   vm.dirty_expire_centisecs      3000
   vm.dirty_ratio                 8
   vm.dirty_writeback_centisecs   500
   vm.dirtytime_expire_seconds    43200
   vm.extfrag_threshold           500
   vm.min_unmapped_ratio          1
   vm.nr_hugepages                0
   vm.nr_hugepages_mempolicy      0
   vm.nr_overcommit_hugepages     0
   vm.swappiness                  1
   vm.watermark_boost_factor      15000
   vm.watermark_scale_factor      10
   vm.zone_reclaim_mode           1
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
   defrag      [always] defer defer+madvise madvise never
   enabled     [always] madvise never
   hpage_pmd_size 2097152
   shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                1
   max_ptes_none         511
   max_ptes_shared       256
   max_ptes_swap         64
   pages_to_scan         4096
   scan_sleep_millisecs  10000
-----
```

```
-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
20. Disk information
   SPEC is set to: /home/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/nvme4n1p3 ext4  1.8T   20G   1.7T   2% /
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
   Vendor:      HPE
   Product:     HPE ProLiant Compute DL345 Gen12
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Platform Notes (Continued)

Product Family: ProLiant
Serial: SANJACSCM

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

9x Hynix HMC694AHBRA480N 64 GB 2 rank 6400, configured at 5200
1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
2x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.20
BIOS Date: 07/11/2025
BIOS Revision: 1.20
Firmware Revision: 1.16

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlbm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlbm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlbm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlbm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

638.imagick_s (continued):

```
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP  
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math  
-fopenmp -fscalar-transform -fvector-transform  
-mllvm -reduce-array-computations=3 -Mrecursive  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

649.fotonik3d_s: basepeak = yes

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang
```

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.60 GHz, AMD EPYC 9655P)

SPECspeed®2017_fp_base = 372

SPECspeed®2017_fp_peak = 380

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

628.pop2_s (continued):

-Wl, -mllvm -Wl, -enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flt0 -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.8.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.8.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-30 23:21:15-0400.

Report generated on 2025-12-03 14:23:00 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-02.