



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

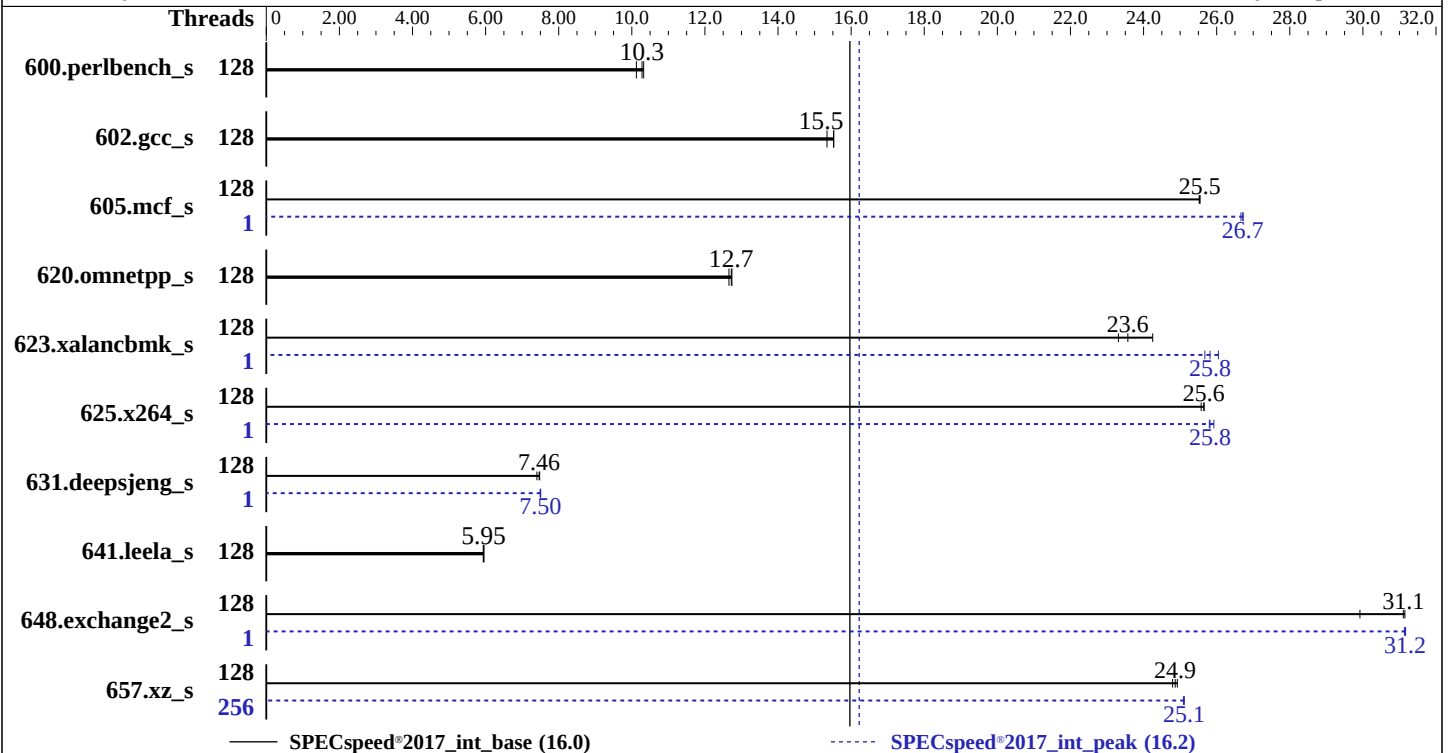

Hardware

CPU Name: AMD EPYC 9745
Max MHz: 3700
Nominal: 2400
Enabled: 128 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 16 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 1 x 1.92 TB 64G NVME SS
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
Kernel 6.4.0-150700.51-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: HPE BIOS Version v1.20 07/11/2025 released Jul-2025
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	175	10.1	<u>173</u>	<u>10.3</u>	172	10.3	128	175	10.1	<u>173</u>	<u>10.3</u>	172	10.3
602.gcc_s	128	260	15.3	256	15.5	<u>257</u>	<u>15.5</u>	128	260	15.3	256	15.5	<u>257</u>	<u>15.5</u>
605.mcf_s	128	185	25.5	<u>185</u>	<u>25.5</u>	185	25.5	1	177	26.7	<u>177</u>	<u>26.7</u>	177	26.7
620.omnetpp_s	128	128	12.7	129	12.7	<u>128</u>	<u>12.7</u>	128	128	12.7	129	12.7	<u>128</u>	<u>12.7</u>
623.xalanchmk_s	128	58.4	24.2	60.8	23.3	<u>60.1</u>	<u>23.6</u>	1	55.2	25.7	<u>54.9</u>	<u>25.8</u>	54.4	26.0
625.x264_s	128	68.8	25.7	<u>68.8</u>	<u>25.6</u>	69.0	25.6	1	<u>68.3</u>	<u>25.8</u>	68.0	25.9	68.4	25.8
631.deepsjeng_s	128	192	7.48	194	7.40	<u>192</u>	<u>7.46</u>	1	191	7.49	191	7.51	<u>191</u>	<u>7.50</u>
641.leela_s	128	287	5.95	<u>287</u>	<u>5.95</u>	287	5.94	128	287	5.95	<u>287</u>	<u>5.95</u>	287	5.94
648.exchange2_s	128	94.4	31.1	<u>94.5</u>	<u>31.1</u>	98.3	29.9	1	94.3	31.2	<u>94.4</u>	<u>31.2</u>	94.4	31.1
657.xz_s	128	249	24.8	<u>249</u>	<u>24.9</u>	248	24.9	256	246	25.1	<u>246</u>	<u>25.1</u>	246	25.1

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-255"

LD_LIBRARY_PATH =

"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-255"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to Four memory domains per socket

Thermal Configuration set to Enhanced CPU Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Aug 28 13:51:44 2025

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -a`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 254 (254.24+suse.148.g83b9060b6e)`
12. Failed units, from `systemctl list-units --state=failed`
13. Services, from `systemctl list-unit-files`
14. Linux kernel boot-time arguments, from `/proc/cmdline`
15. `cpupower frequency-info`
16. `sysctl`
17. `/sys/kernel/mm/transparent_hugepage`
18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
19. OS release
20. Disk information
21. `/sys/devices/virtual/dmi/id`
22. `dmidecode`
23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:51:44 up 17:41, 5 users, load average: 0.08, 0.02, 0.74
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      pts/1    10.28.68.136:  Wed20       8.00s      0.88s     0.08s    /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3092442
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

cpu time (seconds, -t) unlimited
max user processes (-u) 3092442
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
SCREEN -S cpu
/bin/bash
python3 ./run_intspeed.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.015/templogs/preenv.intspeed.015.0.log --lognum 015.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9745 128-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 17
stepping        : 0
microcode       : 0xb10104e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 192 4K pages
cpu cores       : 128
siblings        : 256
1 physical ids (chips)
256 processors (hardware threads)
physical id 0:  core ids 0-127
physical id 0:  apicids 0-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	256
On-line CPU(s) list:	0-255
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9745 128-Core Processor
CPU family:	26
Model:	17
Thread(s) per core:	2
Core(s) per socket:	128
Socket(s):	1
Stepping:	0
Frequency boost:	enabled
CPU(s) scaling MHz:	101%
CPU max MHz:	2400.0000
CPU min MHz:	1500.0000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

BogoMIPS:
Flags:

4799.86
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap hv_inuse_wr_allowed srso_user_kernel_no
amd_lbr_pmc_freeze
AMD-V

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

6 MiB (128 instances)
4 MiB (128 instances)
128 MiB (128 instances)
256 MiB (8 instances)
8
0-15,128-143
16-31,144-159
32-47,160-175
48-63,176-191
64-79,192-207
80-95,208-223
96-111,224-239
112-127,240-255
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Not affected
Mitigation; IBPB on VMEXIT only
Mitigation; Speculative Store Bypass disabled via prctl
Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Not affected
Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15,128-143

node 0 size: 96371 MB

node 0 free: 95492 MB

node 1 cpus: 16-31,144-159

node 1 size: 96759 MB

node 1 free: 95790 MB

node 2 cpus: 32-47,160-175

node 2 size: 96759 MB

node 2 free: 96012 MB

node 3 cpus: 48-63,176-191

node 3 size: 96759 MB

node 3 free: 96025 MB

node 4 cpus: 64-79,192-207

node 4 size: 96759 MB

node 4 free: 95971 MB

node 5 cpus: 80-95,208-223

node 5 size: 96249 MB

node 5 free: 95457 MB

node 6 cpus: 96-111,224-239

node 6 size: 96759 MB

node 6 free: 94748 MB

node 7 cpus: 112-127,240-255

node 7 size: 96720 MB

node 7 free: 95827 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	11	11	12	12	12	12
1:	11	10	11	11	12	12	12	12
2:	11	11	10	11	12	12	12	12
3:	11	11	11	10	12	12	12	12
4:	12	12	12	12	10	11	11	11
5:	12	12	12	12	11	10	11	11
6:	12	12	12	12	11	11	10	11
7:	12	12	12	12	11	11	11	10

9. /proc/meminfo

MemTotal: 791694028 kB

10. who -r

run-level 5 Aug 27 20:10

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* suseconnect-keepalive.service	loaded	failed	failed	Run SUSEConnect --keepalive

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

enabled-runtime
disabled

bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
systemd-remount-fs
NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
autofs autostart-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
chrony-wait chronyd clamd clamonnacc collectd console-getty cups cups-browsed debug-shell
dhcpd dhcpd6 dhcrelay dhcrelay6 dnsmasq ebttables exchange-bmc-os-info fancontrol firewallld
fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load
lm_sensors lunmask man-db-create memcached multipathd munge named nfs nfs-blkmap
nfs-server nfsserver nmb ostree-remount ostree-state-overlay@ pcp-geolocate pmcd pmfind
pmie pmie_farm pmlogger pmlogger_farm pmproxy proftpd rpcbind rpmconfigcheck rsyncd
rtkit-daemon samba-bgqd serial-getty@ smartd-generate_opts smb snmpd snmptrapd
speech-dispatcherd sysstat systemd-boot-check-no-failures systemd-confext
systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd udisks2
update-system-flatpaks upower vncserver@ vsftpd wpa_supplicant@
indirect
pcscd systemd-userdbd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=e9c24f90-4995-4bc8-80c5-b1e0dc1c50dd
splash=silent
resume=/dev/disk/by-uuid/f8d2aff2-72e3-490e-b7aa-5412864f7e46
mitigations=auto
quiet
security=apparmor
crashkernel=374M,high
crashkernel=72M,low
amd_pstate=active

15. cpupower frequency-info

analyzing CPU 142:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Platform Notes (Continued)

```
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvice madvice never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme3n1p5  xfs   953G   25G  928G   3% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:         HPE
Product:        HPE ProLiant Compute DL345 Gen12
Product Family: ProLiant
Serial:         2M110725V1
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

Memory:

```
9x Hynix HMC694AHBRA480N 64 GB 2 rank 6400, configured at 5200
3x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:         HPE
BIOS Version:        1.20
BIOS Date:           07/11/2025
BIOS Revision:       1.20
Firmware Revision:   1.16
-----
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Compiler Version Notes

```
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
```

```
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
    | 641.leela_s(base, peak)
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
```

```
Fortran | 648.exchange2_s(base, peak)
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fvecLib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fvecLib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fvecLib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

-fveclib=AMDLIBM -ffast-math -fopenmp -flto

-DSPEC_OPENMP -fremap-arrays -fstrip-mining

-fstruct-layout=9 -mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3

-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp

-lamdlibm -lamdalloc -lflang

625.x264_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-allow-multiple-definition

-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Peak Optimization Flags (Continued)

625.x264_s (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

657.xz_s: Same as 625.x264_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12

(2.40 GHz, AMD EPYC 9745)

SPECspeed®2017_int_base = 16.0

SPECspeed®2017_int_peak = 16.2

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2025

Hardware Availability: Aug-2025

Software Availability: Apr-2025

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.8.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.8.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-08-28 14:51:43-0400.

Report generated on 2025-12-03 14:23:00 by CPU2017 PDF formatter v6716.

Originally published on 2025-12-02.