SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R960 (Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1180

SPECrate®2017_int_peak = 1220

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2025
Hardware Availability: Mar-2025
Software Availability: Apr-2025

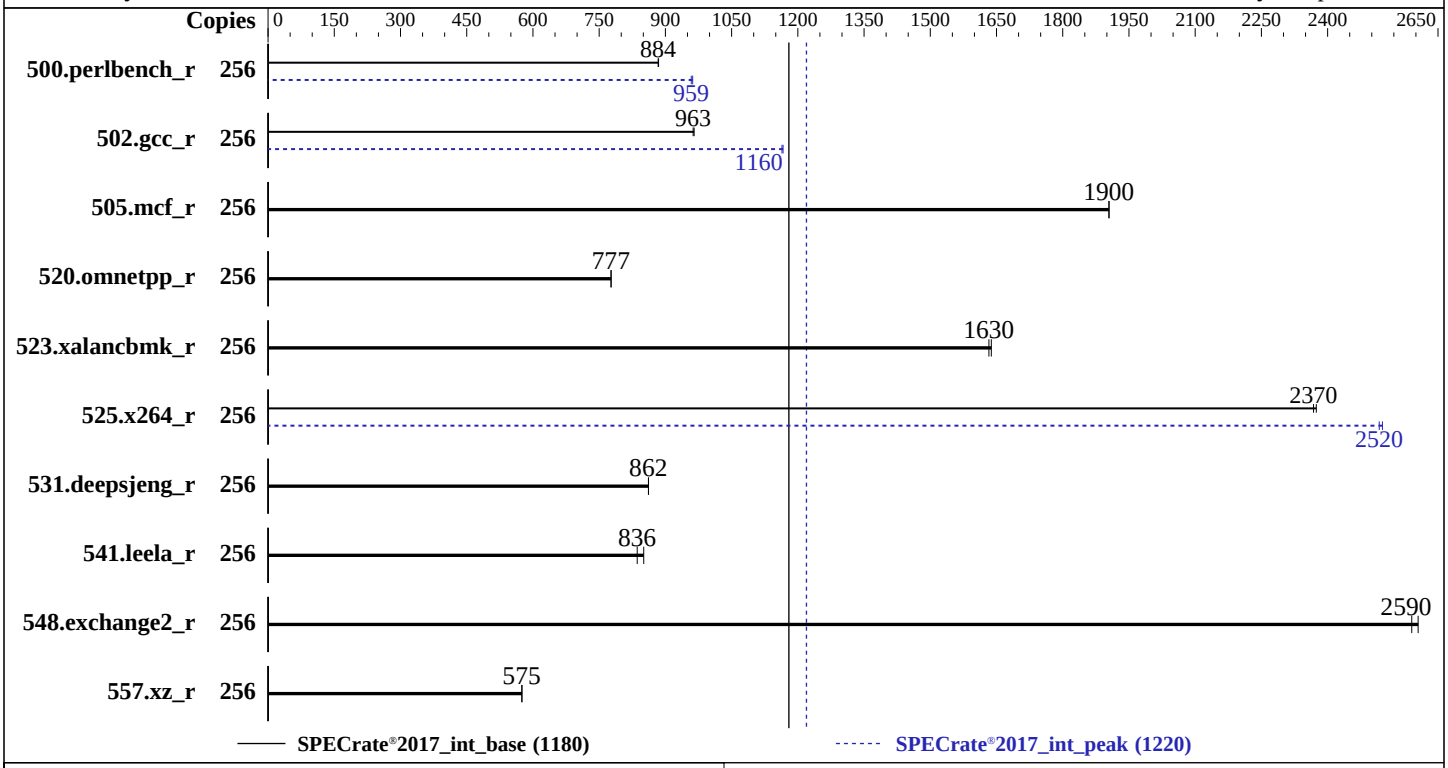

Hardware

CPU Name:	Intel Xeon Gold 6448H
Max MHz:	4100
Nominal:	2400
Enabled:	128 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC5-5600B-R, running at 4800)
Storage:	140 GB on tmpfs
Other:	CPU Cooling: DLC

Software

OS:	Red Hat Enterprise Linux 9.5 (Plow) 5.14.0-503.38.1.el9_5.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 2.7.5 released Jul-2025
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R960 (Intel Xeon Gold 6448H)

SPECrate®2017_int_base = 1180

SPECrate®2017_int_peak = 1220

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2025
Hardware Availability: Mar-2025
Software Availability: Apr-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	461	885	**461**	**884**			256	424	962	**425**	**959**		
502.gcc_r	256	376	965	**376**	**963**			256	311	1170	**311**	**1160**		
505.mcf_r	256	**217**	**1900**	217	1910			256	**217**	**1900**	217	1910		
520.omnetpp_r	256	**432**	**777**	432	777			256	**432**	**777**	432	777		
523.xalancbmk_r	256	**166**	**1630**	165	1640			256	**166**	**1630**	165	1640		
525.x264_r	256	**189**	**2370**	189	2370			256	**178**	**2520**	178	2520		
531.deepsjeng_r	256	**341**	**862**	340	862			256	**341**	**862**	340	862		
541.leela_r	256	498	851	**507**	**836**			256	498	851	**507**	**836**		
548.exchange2_r	256	**259**	**2590**	257	2600			256	**259**	**2590**	257	2600		
557.xz_r	256	**481**	**575**	481	575			256	**481**	**575**	481	575		

SPECrate®2017_int_base = 1180

SPECrate®2017_int_peak = 1220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ram
     disk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

(Continued on next page)

General Notes (Continued)

Benchmark run from a 140 GB ramdisk created with the cmd: "mount -t tmpfs -o size=140G tmpfs /mnt/ramdisk"

Platform Notes

```
BIOS Settings:
            DCU Streamer Prefetcher : Disabled
                   Sub NUMA Cluster : 2-Way Clustering
       UMA Based Clustering Status : Disable
                Dead Line LLC Alloc : Disabled
                     Optimizer Mode : Enabled

                     System Profile : Custom
               CPU Power Management : Maximum Performance
                                C1E : Disabled
                           C-States : Autonomous
                Memory Patrol Scrub : Disabled
              Energy Efficient Policy : Performance
 PCI ASPM L1 Link Power Management : Disabled
                DIMM Self Healing -
     on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR9601-R960 Thu Oct 23 10:47:58 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-46.el9_5.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux SLR9601-R960 5.14.0-503.38.1.el9_5.x86_64 #1 SMP PREEMPT_DYNAMIC Sun Apr 13 22:01:49 EDT 2025 x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   10:47:58 up 11 min,  1 user,  load average: 0.31, 0.08, 0.02
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      10:37   46.00s  0.86s  0.01s /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh
  rate --define DL-VERS=6.3b --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) unlimited
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4123622
  max locked memory           (kbytes, -l) 8192
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4123622
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.3b --output_format
   html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.3b --output_format
   html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
   DL-VERS=6.3b --output_format html,pdf,txt intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
   --define DL-VERS=6.3b --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
   refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log
   --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

------------------------------------------------------------
6. /proc/cpuinfo
```

(Continued on next page)

Platform Notes (Continued)

```
     model name      : Intel(R) Xeon(R) Gold 6448H
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 7
     microcode       : 0x2b000643
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
     cpu cores       : 32
     siblings        : 64
     4 physical ids (chips)
     256 processors (hardware threads)
     physical id 0: core ids 0-31
     physical id 1: core ids 0-31
     physical id 2: core ids 0-31
     physical id 3: core ids 0-31
     physical id 0: apicids 0-63
     physical id 1: apicids 128-191
     physical id 2: apicids 256-319
     physical id 3: apicids 384-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        46 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               256
   On-line CPU(s) list:                  0-255
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel
   Model name:                           Intel(R) Xeon(R) Gold 6448H
   BIOS Model name:                      Intel(R) Xeon(R) Gold 6448H
   CPU family:                           6
   Model:                                143
   Thread(s) per core:                   2
   Core(s) per socket:                   32
   Socket(s):                            4
   Stepping:                             7
   CPU(s) scaling MHz:                   100%
   CPU max MHz:                          4100.0000
   CPU min MHz:                          800.0000
   BogoMIPS:                             4800.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                         xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba
                                         ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad
                                         fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a
                                         avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                                         avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                                         cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                         avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi
```

(Continued on next page)

Platform Notes (Continued)

```
                                 avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                 avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                 bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                 serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                 amx_int8 flush_l1d arch_capabilities
  Virtualization:                VT-x
  L1d cache:                     6 MiB (128 instances)
  L1i cache:                     4 MiB (128 instances)
  L2 cache:                      256 MiB (128 instances)
  L3 cache:                      240 MiB (4 instances)
  NUMA node(s):                  8
  NUMA node0 CPU(s):             0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,
                                 168,176,184,192,200,208,216,224,232,240,248
  NUMA node1 CPU(s):             4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,16
                                 4,172,180,188,196,204,212,220,228,236,244,252
  NUMA node2 CPU(s):             1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,
                                 169,177,185,193,201,209,217,225,233,241,249
  NUMA node3 CPU(s):             5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,16
                                 5,173,181,189,197,205,213,221,229,237,245,253
  NUMA node4 CPU(s):             2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162
                                 ,170,178,186,194,202,210,218,226,234,242,250
  NUMA node5 CPU(s):             6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,16
                                 6,174,182,190,198,206,214,222,230,238,246,254
  NUMA node6 CPU(s):             3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163
                                 ,171,179,187,195,203,211,219,227,235,243,251
  NUMA node7 CPU(s):             7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,16
                                 7,175,183,191,199,207,215,223,231,239,247,255
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                 PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         2M     256M   16 Unified         2  2048        1             64
     L3        60M     240M   15 Unified         3 65536        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus:
  0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184,192,200,208,216,224,232,24
  0,248
  node 0 size: 127956 MB
  node 0 free: 127408 MB
  node 1 cpus:
```

(Continued on next page)

Platform Notes (Continued)

```
  4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188,196,204,212,220,228,236,
  244,252
  node 1 size: 129015 MB
  node 1 free: 128700 MB
  node 2 cpus:
  1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185,193,201,209,217,225,233,24
  1,249
  node 2 size: 129015 MB
  node 2 free: 128533 MB
  node 3 cpus:
  5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189,197,205,213,221,229,237,
  245,253
  node 3 size: 128972 MB
  node 3 free: 128489 MB
  node 4 cpus:
  2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186,194,202,210,218,226,234,2
  42,250
  node 4 size: 129015 MB
  node 4 free: 128448 MB
  node 5 cpus:
  6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190,198,206,214,222,230,238,
  246,254
  node 5 size: 129015 MB
  node 5 free: 128639 MB
  node 6 cpus:
  3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187,195,203,211,219,227,235,2
  43,251
  node 6 size: 129015 MB
  node 6 free: 117371 MB
  node 7 cpus:
  7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191,199,207,215,223,231,239,
  247,255
  node 7 size: 129000 MB
  node 7 free: 128552 MB
  node distances:
  node     0    1    2    3    4    5    6    7
     0:   10   12   21   21   21   21   21   21
     1:   12   10   21   21   21   21   21   21
     2:   21   21   10   12   21   21   21   21
     3:   21   21   12   10   21   21   21   21
     4:   21   21   21   21   10   12   21   21
     5:   21   21   21   21   12   10   21   21
     6:   21   21   21   21   21   21   10   12
     7:   21   21   21   21   21   21   12   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055751940 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 23 10:37

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-46.el9_5.3)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
```

(Continued on next page)

Platform Notes (Continued)

```
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond dbus-broker firewalld gdm
                   getty@ insights-client-boot irqbalance iscsi iscsi-onboot iscsi-starter kdump
                   libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
                   nis-domainname nvmefc-boot-connections ostree-remount power-profiles-daemon
                   qemu-guest-agent rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd
                   switcheroo-control systemd-boot-update systemd-network-generator tuned udisks2 upower
                   vgauthd vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                   cpupower cups cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump
                   iprinit iprupdate iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon lvm-devices-import
                   man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables
                   nvmf-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman
                   podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl
                   rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable
                   serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                   systemd-pstore systemd-sysext wpa_supplicant
  indirect         spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   systemd-sysupdate systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-503.38.1.el9_5.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 106:
    current policy: frequency should be within 4.10 GHz and 4.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.5 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.5 (Plow)
  system-release Red Hat Enterprise Linux release 9.5 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  140G  5.0G  136G   4% /mnt/ramdisk

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R960
    Product Family: PowerEdge
    Serial:         SLR9601

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    21x 00AD063200AD HMCG88AGBRA188N 32 GB 2 rank 5600, configured at 4800
    11x 00AD063200AD HMCG88AGBRA190N 32 GB 2 rank 5600, configured at 4800


------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.7.5
    BIOS Date:         07/31/2025
    BIOS Revision:     2.7
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

505.mcf_r: `basepeak = yes`

525.x264_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fno-alias -L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.17.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.17.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-23 11:47:58-0400.
Report generated on 2025-12-03 14:23:33 by CPU2017 PS formatter v6716.
Originally published on 2025-12-02.