SPEChpc™ 2021 Large Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

IBM

(Test Sponsor: Oak Ridge National Laboratory)

Summit: IBM Power System AC922 (IBM Power9, Tesla V100-SXM2-16GB)

SPEChpc 2021_lrg_base = 41.0

SPEChpc 2021_lrg_peak = Not Run

hpc2021 License: 056A
Test Sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test Date: Sep-2021
Hardware Availability: Nov-2018
Software Availability: Jul-2021

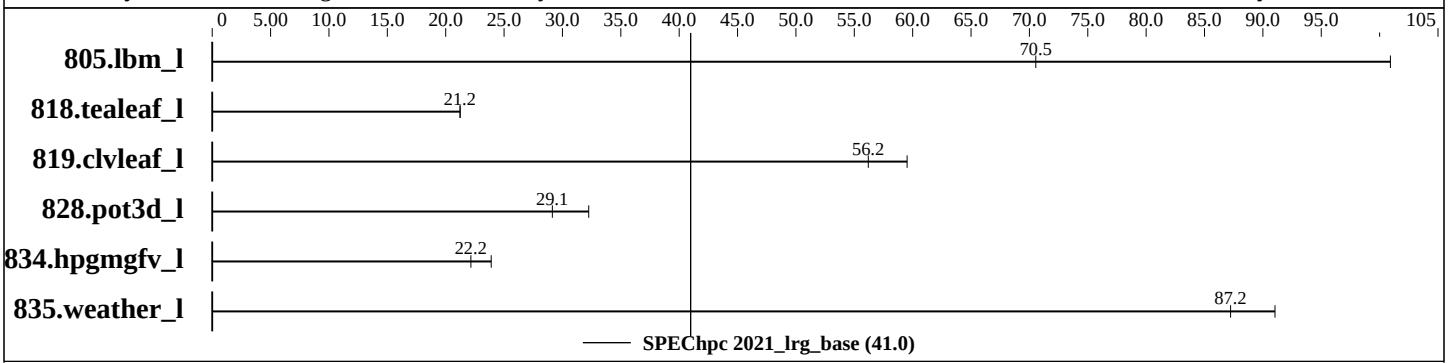

Results Table

Benchmark	Base									Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
805.lbm_l	ACC	8400	1	**38.6**	**70.5**	27.0	101											
818.tealeaf_l	ACC	8400	1	**68.3**	**21.2**	68.3	21.2											
819.clvleaf_l	ACC	8400	1	**37.4**	**56.2**	35.3	59.5											
828.pot3d_l	ACC	8400	1	**156**	**29.1**	141	32.3											
834.hpgmgfv_l	ACC	8400	1	**151**	**22.2**	140	23.9											
835.weather_l	ACC	8400	1	**39.3**	**87.2**	37.6	91.0											

SPEChpc 2021_lrg_base = 41.0

SPEChpc 2021_lrg_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Large Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

IBM
(Test Sponsor: Oak Ridge National Laboratory)

Summit: IBM Power System AC922 (IBM Power9, Tesla V100-SXM2-16GB)

SPEChpc 2021_lrg_base = 41.0

SPEChpc 2021_lrg_peak = Not Run

hpc2021 License: 056A
Test Sponsor: Oak Ridge National Laboratory
Tested by: Oak Ridge National Laboratory

Test Date: Sep-2021
Hardware Availability: Nov-2018
Software Availability: Jul-2021

Hardware Summary

Type of System:	Homogenous Cluster
Compute Node:	IBM Power System AC922
Interconnect:	Mellanox InfiniBand
Compute Nodes Used:	1400
Total Chips:	2800
Total Cores:	30800
Total Threads:	123200
Total Memory:	700 TB
Max. Peak Threads:	--

Software Summary

Compiler:	C/C++/Fortran: Version 21.7 of NVHPC Toolkit
MPI Library:	Spectrum MPI Version 10.4.0.3
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	ACC
Base Ranks Run:	8400
Base Threads Run:	1
Peak Parallel Models:	Not Run
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--
Max. Peak Threads:	--
Min. Peak Threads:	--

Node Description: IBM Power System AC922

Hardware

Number of nodes:	1400
Uses of the node:	compute
Vendor:	IBM
Model:	IBM Power System AC922
CPU Name:	IBM POWER9 2.1 (pvr 004e 1201)
CPU(s) orderable:	2 chips
Chips enabled:	2
Cores enabled:	22
Cores per chip:	44
Threads per core:	4
CPU Characteristics:	Up to 3.8 GHz
CPU MHz:	2300
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	110 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (16 x 32 GB RDIMM-DDR4-2666)
Disk Subsystem:	2 x 800 GB (Samsung Electronics Co Ltd NVMe SSD Controller 172Xa/172Xb)
Other Hardware:	None
Accel Count:	4
Accel Model:	Tesla V100-SXM2-16GB
Accel Vendor:	NVIDIA Corporation
Accel Type:	GPU
Accel Connection:	NVLink 2.0
Accel ECC enabled:	Yes
Accel Description:	See Notes
Adapter:	Mellanox ConnectX-5
Number of Adapters:	2
Slot Type:	None
Data Rate:	100 Gb/s (4X EDR)

(Continued on next page)

Software

Accelerator Driver:	NVIDIA CUDA 450.80.02
Adapter:	Mellanox ConnectX-5
Adapter Driver:	4.9-2.2.4.1
Adapter Firmware:	16.29.1016
Operating System:	Red Hat Enterprise Linux 8.2
Local File System:	xfs
Shared File System:	250 PB IBM Spectrum Scale parallel filesystem over 4X EDR InfiniBand
System State:	Multi-user, run level 3
Other Software:	None

Node Description: IBM Power System AC922

Hardware (Continued)

Ports Used: 2
Interconnect Type: EDR InfiniBand

Interconnect Description: Mellanox InfiniBand

Hardware

Vendor:	Mellanox
Model:	Mellanox Switch IB-2
Switch Model:	Mellanox IB EDR Switch IB-2
Number of Switches:	1
Number of Ports:	36
Data Rate:	100 Gb/s
Firmware:	--
Topology:	Non-blocking Fat-tree
Primary Use:	MPI Traffic and GPFS access

Software

: --

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
 MPI startup command:
   jsrun command was used to launch job using 1 GPU/rank.
Detailed information from nvaccelinfo

CUDA Driver Version:           11000
NVRM version:                  NVIDIA UNIX ppc64le Kernel Module  450.80.02  Wed Sep 23 00:55:04 UTC 2020

Device Number:                 0
Device Name:                   Tesla V100-SXM2-16GB
Device Revision Number:        7.0
Global Memory Size:            16911433728
Number of Multiprocessors:     80
Concurrent Copy and Execution: Yes
Total Constant Memory:         65536
Total Shared Memory per Block: 49152
Registers per Block:           65536
Warp Size:                     32
Maximum Threads per Block:     1024
Maximum Block Dimensions:      1024, 1024, 64
Maximum Grid Dimensions:       2147483647 x 65535 x 65535
```

(Continued on next page)

General Notes (Continued)

```
Maximum Memory Pitch:          2147483647B
Texture Alignment:             512B
Clock Rate:                    1530 MHz
Execution Timeout:             No
Integrated Device:             No
Can Map Host Memory:           Yes
Compute Mode:                  exclusive-process
Concurrent Kernels:            Yes
ECC Enabled:                   Yes
Memory Clock Rate:             877 MHz
Memory Bus Width:              4096 bits
L2 Cache Size:                 6291456 bytes
Max Threads Per SMP:           2048
Async Engines:                 4
Unified Addressing:            Yes
Managed Memory:                Yes
Concurrent Managed Memory:     Yes
Preemption Supported:          Yes
Cooperative Launch:            Yes
  Multi-Device:                Yes
Default Target:                cc70
```

Compiler Version Notes

```
==============================================================================
 CC  805.lbm_l(base) 818.tealeaf_l(base) 834.hpgmgfv_l(base)
------------------------------------------------------------------------------
/usr/lib64/crt1.o:(.rodata+0x8): undefined reference to ‘main’
/usr/bin/ld: link errors found, deleting executable ‘a.out’
pgacclnk: child process exit status 1: /sw/summit/xalt/1.2.1/bin/ld
nvc 21.7-0 linuxpower target on Linuxpower
NVIDIA Compilers and Tools
Copyright (c) 2021, NVIDIA CORPORATION & AFFILIATES.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  819.clvleaf_l(base) 828.pot3d_l(base) 835.weather_l(base)
------------------------------------------------------------------------------
nvfortran 21.7-0 linuxpower target on Linuxpower
NVIDIA Compilers and Tools
Copyright (c) 2021, NVIDIA CORPORATION & AFFILIATES.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`mpicc`

Fortran benchmarks:
`mpif90`

Base Optimization Flags

C benchmarks:
`-O3 -acc=gpu`

Fortran benchmarks:
`-O3 -acc=gpu`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/nv2021_flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/nv2021_flags.xml`

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.0.2 on 2021-09-20 20:08:12-0400.
Report generated on 2023-08-25 19:03:21 by hpc2021 PS formatter v1.0.3.
Originally published on 2021-10-27.