SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPEChpc 2021_tny_base = 12.9

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

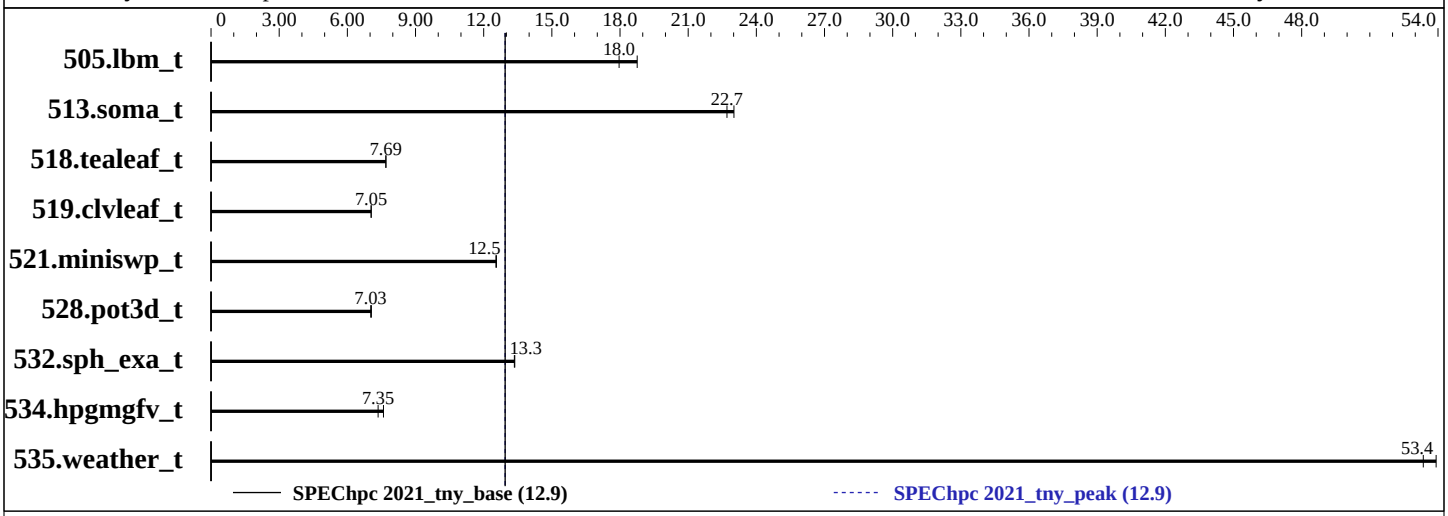

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	24	16	**125**	**18.0**	120	18.8			OMP	24	16	**125**	**18.0**	120	18.8		
513.soma_t	OMP	24	16	**163**	**22.7**	161	23.0			OMP	24	16	**163**	**22.7**	161	23.0		
518.tealeaf_t	OMP	24	16	214	7.70	**214**	**7.69**			OMP	24	16	214	7.70	**214**	**7.69**		
519.clvleaf_t	OMP	24	16	234	7.05	**234**	**7.05**			OMP	24	16	234	7.05	**234**	**7.05**		
521.miniswp_t	OMP	24	16	**128**	**12.5**	127	12.6			OMP	24	16	**128**	**12.5**	127	12.6		
528.pot3d_t	OMP	24	16	**302**	**7.03**	301	7.06			OMP	24	16	**302**	**7.03**	301	7.06		
532.sph_exa_t	OMP	24	16	146	13.4	**146**	**13.3**			OMP	24	16	146	13.4	**146**	**13.3**		
534.hpgmgfv_t	OMP	24	16	**160**	**7.35**	155	7.59			OMP	24	16	**160**	**7.35**	155	7.59		
535.weather_t	OMP	24	16	59.8	53.9	**60.4**	**53.4**			OMP	24	16	59.8	53.9	**60.4**	**53.4**		

SPEChpc 2021_tny_base = **12.9**

SPEChpc 2021_tny_peak = **12.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Tiny Result

Copyright 2021-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPEChpc 2021_tny_base = 12.9

SPEChpc 2021_tny_peak = 12.9

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Hardware Summary

Type of System:	Homogenous
Compute Node:	A+ Server 2125HS-TNR
Compute Nodes Used:	1
Total Chips:	2
Total Cores:	192
Total Threads:	384
Total Memory:	1536 GB
Max. Peak Threads:	16

Software Summary

Compiler:	AMD Optimizing C/C++ and Fortran Compilers (AOCC) Version 4.0.0 Build 389 for Linux
MPI Library:	OpenMPI Version 4.1.1
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	OMP
Base Ranks Run:	24
Base Threads Run:	16
Peak Parallel Models:	OMP
Minimum Peak Ranks:	24
Maximum Peak Ranks:	24
Max. Peak Threads:	16
Min. Peak Threads:	16

Node Description: A+ Server 2125HS-TNR

Hardware

Number of nodes:	1
Uses of the node:	compute
Vendor:	Supermicro
Model:	A+ Server 2125HS-TNR
CPU Name:	AMD EPYC 9654
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	192
Cores per chip:	96
Threads per core:	2
CPU Characteristics:	Max. Boost Clock upto 3.7GHz
CPU MHz:	2400
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	384 MB I+D on chip per chip
Other Cache:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Disk Subsystem:	4 x 1.92 TB NVMe PCIe Gen4.0
Other Hardware:	None
Accel Count:	--
Accel Model:	--
Accel Vendor:	--
Accel Type:	--
Accel Connection:	--
Accel ECC enabled:	--
Accel Description:	--
Adapter:	Mellanox ConnectX-5 Ex
Number of Adapters:	1
Slot Type:	PCI-Express 4.0 x16
Data Rate:	100 Gbits/s
Ports Used:	1
Interconnect Type:	Nvidia Mellanox ConnectX-5 Ex

Software

Accelerator Driver:	--
Adapter:	Mellanox ConnectX-5 Ex
Adapter Driver:	None
Adapter Firmware:	None
Operating System:	SUSE Linux Enterprise Server 15 SP4 Kernel 5.14.21-150400.24.21-default
Local File System:	ext4
Shared File System:	NFS share
System State:	Multi-user, run level 3
Other Software:	None

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
 MPI startup command:
   mpirun command was used to start MPI jobs.
```

Compiler Version Notes

```
==============================================================================
 CC  505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)
     521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
 CXXC 532.sph_exa_t(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
 FC  519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base,
     peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
mpicc

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
mpicxx

Fortran benchmarks:
mpif90

Base Portability Flags

519.clvleaf_t: -DSPEC_USE_MPIFH
528.pot3d_t: -DSPEC_USE_MPIFH
535.weather_t: -DSPEC_USE_MPIFH

Base Optimization Flags

C benchmarks:
-O3 -ffast-math -flto -march=znver4 -fopenmp

C++ benchmarks:
-O3 -ffast-math -flto -march=znver4 -fopenmp

Fortran benchmarks:
-O3 -ffast-math -flto -march=znver4 -fopenmp

Base Other Flags

C benchmarks (except as noted below):
-Ispecmpitime -I/root/aocc/aocc-compiler-rel-4.0-3206-389/include

521.miniswp_t: -Ispecmpitime/
-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include

534.hpgmgfv_t: -Ispecmpitime
-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include

C++ benchmarks:
-Ispecmpitime -I/root/aocc/aocc-compiler-rel-4.0-3206-389/include

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks (except as noted below):
`-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`
`-I/root/aocc/compilers/openmpi-4.1.1/include/`

519.clvleaf_t: `-Ispecmpitime`
`-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`
`-I/root/aocc/compilers/openmpi-4.1.1/include/`

Peak Compiler Invocation

C benchmarks:
`mpicc`

C++ benchmarks:
`mpicxx`

Fortran benchmarks:
`mpif90`

Peak Portability Flags

519.clvleaf_t: `-DSPEC_USE_MPIFH`
528.pot3d_t: `-DSPEC_USE_MPIFH`
535.weather_t: `-DSPEC_USE_MPIFH`

Peak Optimization Flags

C benchmarks:

505.lbm_t: `basepeak = yes`

513.soma_t: `basepeak = yes`

518.tealeaf_t: `basepeak = yes`

521.miniswp_t: `basepeak = yes`

534.hpgmgfv_t: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

532.sph_exa_t: `basepeak = yes`

Fortran benchmarks:

519.clvleaf_t: `basepeak = yes`

528.pot3d_t: `basepeak = yes`

535.weather_t: `basepeak = yes`

Peak Other Flags

C benchmarks (except as noted below):
`-Ispecmpitime -I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`

521.miniswp_t: `-Ispecmpitime/`
`-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`

534.hpgmgfv_t: `-Ispecmpitime`
`-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`

C++ benchmarks:
`-Ispecmpitime -I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`

Fortran benchmarks (except as noted below):
`-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`
`-I/root/aocc/compilers/openmpi-4.1.1/include/`

519.clvleaf_t: `-Ispecmpitime`
`-I/root/aocc/aocc-compiler-rel-4.0-3206-389/include`
`-I/root/aocc/compilers/openmpi-4.1.1/include/`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/amd2021_flags.2022-11-10.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/amd2021_flags.2022-11-10.xml`

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2022-10-17 17:15:51-0400.
Report generated on 2022-11-10 15:09:13 by hpc2021 PS formatter v1.0.3.
Originally published on 2022-11-10.