



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Supermicro


SPEChpc 2021_sml_base = 0.3334

A+ Server 2115GT-HNTF (AMD EPYC 9174F)

SPEChpc 2021_sml_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Nov-2022
Software Availability: Nov-2022

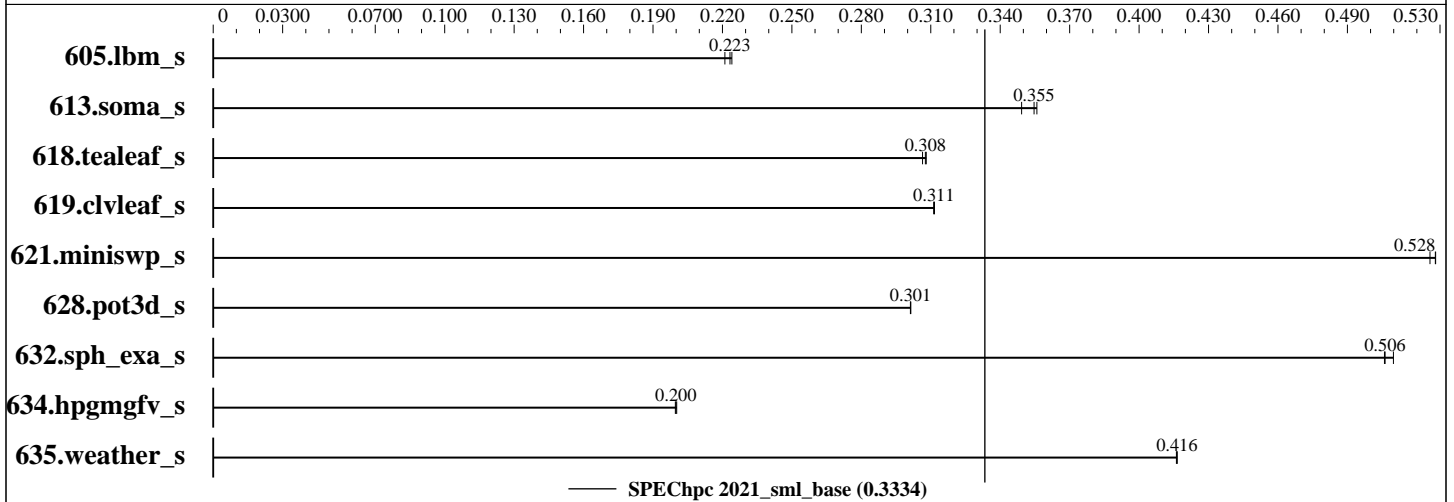

Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	MPI	32	1	6942	0.223	7012	0.221	6917	0.224									
613.soma_s	MPI	32	1	4512	0.355	4581	0.349	4496	0.356									
618.tealeaf_s	MPI	32	1	6663	0.308	6689	0.306	6655	0.308									
619.clvleaf_s	MPI	32	1	5299	0.311	5295	0.312	5300	0.311									
621.miniswp_s	MPI	32	1	2083	0.528	2093	0.526	2083	0.528									
628.pot3d_s	MPI	32	1	5560	0.301	5558	0.301	5561	0.301									
632.sph_exa_s	MPI	32	1	4545	0.506	4543	0.506	4511	0.510									
634.hpgmgfv_s	MPI	32	1	4869	0.200	4877	0.200	4883	0.200									
635.weather_s	MPI	32	1	6244	0.416	6244	0.416	6248	0.416									

SPEChpc 2021_sml_base = 0.3334

SPEChpc 2021_sml_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_sml_base = 0.3334

A+ Server 2115GT-HNTF (AMD EPYC 9174F)

SPEChpc 2021_sml_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Hardware Summary

Type of System: Homogenous
Compute Node: A+ Server 2115GT-HNTF
Compute Nodes Used: 1
Total Chips: 1
Total Cores: 16
Total Threads: 32
Total Memory: 1152 GB
Max. Peak Threads: --

Software Summary

Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC)
Version 4.0.0 Build 389 for Linux
MPI Library: OpenMPI Version 4.1.1
Other MPI Info: None
Other Software: None
Base Parallel Model: MPI
Base Ranks Run: 32
Base Threads Run: 1
Peak Parallel Models: Not Run
Minimum Peak Ranks: --
Maximum Peak Ranks: --
Max. Peak Threads: --
Min. Peak Threads: --

Node Description: A+ Server 2115GT-HNTF

Hardware

Number of nodes: 1
Uses of the node: compute
Vendor: Supermicro
Model: A+ Server 2115GT-HNTF
CPU Name: AMD EPYC 9174F
CPU(s) orderable: 1 chip
Chips enabled: 1
Cores enabled: 16
Cores per chip: 16
Threads per core: 2
CPU Characteristics: Max. Boost Clock upto 4.4GHz
CPU MHz: 4100
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 256 MB I+D on chip per chip
32 MB shared / 2 cores
Other Cache: None
Memory: 1152 GB (12 x 96 GB 2Rx8 PC5-4800B-R)
Disk Subsystem: 1 x 1.92 TB Samsung SATA III SSD
Other Hardware: None
Accel Count: --
Accel Model: --
Accel Vendor: --
Accel Type: --
Accel Connection: --
Accel ECC enabled: --
Accel Description: --
Adapter: None
Number of Adapters: 0
Slot Type: None
Data Rate: None
Ports Used: 0

Software

Accelerator Driver: --
Adapter: None
Adapter Driver: None
Adapter Firmware: None
Operating System: Ubuntu 22.04.1 LTS
Kernel 5.15.0-58-generic
Local File System: ext4
Shared File System: None
System State: Multi-user, run level 5
Other Software: None

(Continued on next page)



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_sml_base = 0.3334

A+ Server 2115GT-HNTF (AMD EPYC 9174F)

SPEChpc 2021_sml_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Node Description: A+ Server 2115GT-HNTF

Hardware (Continued)

Interconnect Type: --

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:
mpirun command was used to start MPI jobs.

Compiler Version Notes

=====
CC 605.lbm_s(base) 613.soma_s(base) 618.tealeaf_s(base) 621.miniswp_s(base)
634.hpgmgfv_s(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-4.0.0/bin

=====
CXXC 632.sph_exa_s(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-4.0.0/bin

=====
FC 619.clvleaf_s(base) 628.pot3d_s(base) 635.weather_s(base)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-4.0.0/bin



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_sml_base = 0.3334

A+ Server 2115GT-HNTF (AMD EPYC 9174F)

SPEChpc 2021_sml_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:

mpicc

C++ benchmarks:

mpicxx

Fortran benchmarks:

mpif90

Base Portability Flags

619.clvleaf_s: -DSPEC_USE_MPIFH
628.pot3d_s: -DSPEC_USE_MPIFH
635.weather_s: -DSPEC_USE_MPIFH

Base Optimization Flags

C benchmarks:

-O3 -ffast-math -flto -march=znver4

C++ benchmarks:

-O3 -ffast-math -flto -march=znver4

Fortran benchmarks:

-O3 -ffast-math -flto -march=znver4

Base Other Flags

C benchmarks:

-Ispecmpitime -I/include

C++ benchmarks:

-Ispecmpitime -I/include

Fortran benchmarks (except as noted below):

-I/include -I/include/

619.clvleaf_s: -Ispecmpitime -I/include -I/include/



SPEChpc™ 2021 Small Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Supermicro

SPEChpc 2021_sml_base = 0.3334

A+ Server 2115GT-HNTF (AMD EPYC 9174F)

SPEChpc 2021_sml_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Feb-2023
Hardware Availability: Nov-2022
Software Availability: Nov-2022

The flags file that was used to format this result can be browsed at
http://www.spec.org/hpc2021/flags/amd2021_flags.2022-11-10.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/hpc2021/flags/amd2021_flags.2022-11-10.xml

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2023-02-18 02:18:27-0500.
Report generated on 2023-03-09 13:02:57 by hpc2021 PDF formatter v1.0.3.
Originally published on 2023-03-09.