SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Intel

Endeavour: Intel Server D50DNP2MFALACB (Intel Xeon Platinum 8480+)

SPEChpc 2021_tny_base = 15.9

SPEChpc 2021_tny_peak = 16.9

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Apr-2023

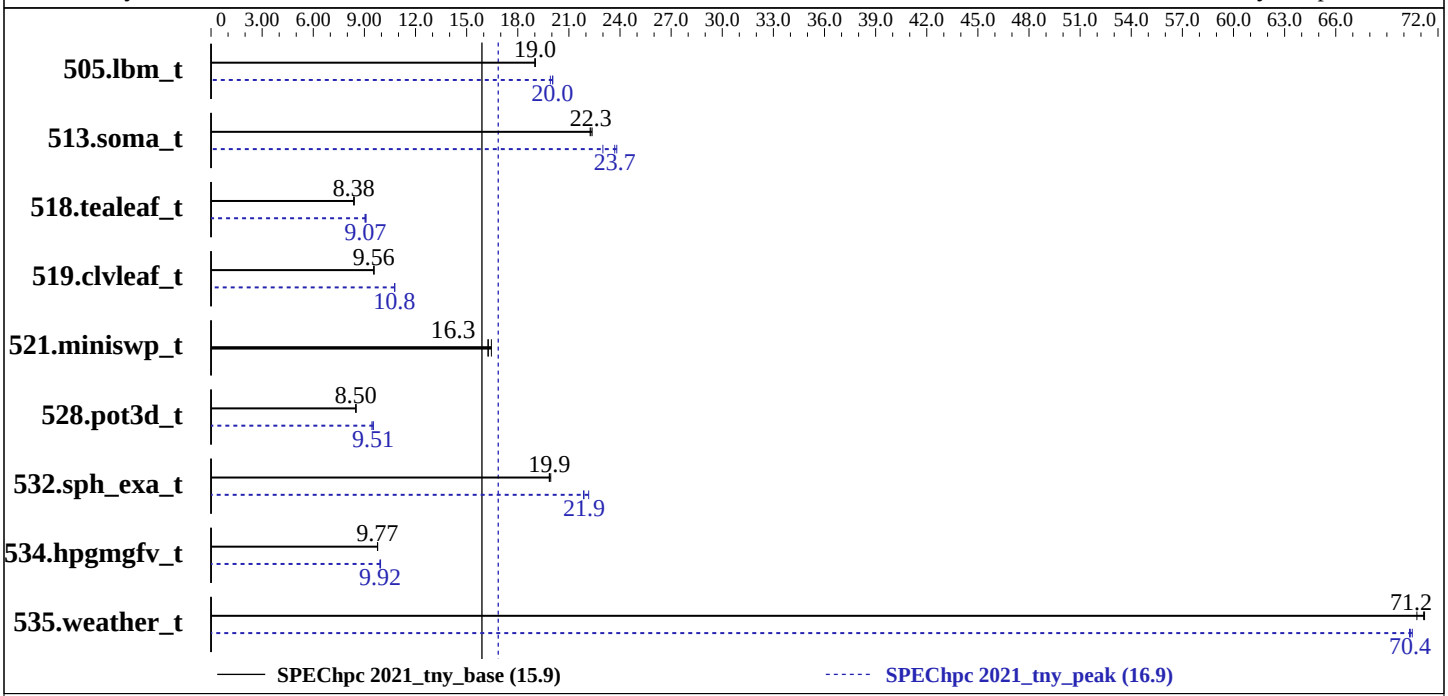

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	16	14	118	19.0	**118**	**19.0**	118	19.0	OMP	56	4	113	19.9	112	20.1	**112**	**20.0**
513.soma_t	OMP	16	14	**166**	**22.3**	165	22.4	166	22.2	OMP	4	56	**156**	**23.7**	155	23.8	161	23.0
518.tealeaf_t	OMP	16	14	**197**	**8.38**	197	8.38	196	8.40	OMP	16	14	183	9.04	**182**	**9.07**	181	9.10
519.clvleaf_t	OMP	16	14	**173**	**9.56**	173	9.55	173	9.56	OMP	16	14	153	10.8	**153**	**10.8**	153	10.8
521.miniswp_t	OMP	16	14	98.5	16.2	**98.3**	**16.3**	97.3	16.5	OMP	16	14	98.5	16.2	**98.3**	**16.3**	97.3	16.5
528.pot3d_t	OMP	16	14	250	8.51	**250**	**8.50**	250	8.49	OMP	32	7	225	9.44	223	9.52	**223**	**9.51**
532.sph_exa_t	OMP	16	14	98.2	19.9	97.8	19.9	**98.2**	**19.9**	OMP	112	2	88.0	22.2	**89.1**	**21.9**	89.2	21.9
534.hpgmgfv_t	OMP	16	14	120	9.77	120	9.78	**120**	**9.77**	OMP	32	7	**118**	**9.92**	118	9.92	118	9.95
535.weather_t	OMP	16	14	**45.3**	**71.2**	45.6	70.8	45.3	71.2	OMP	112	2	45.8	70.5	**45.8**	**70.4**	45.9	70.3

SPEChpc 2021_tny_base = **15.9**

SPEChpc 2021_tny_peak = **16.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Intel

Endeavour: Intel Server D50DNP2MFALACB (Intel Xeon Platinum 8480+)

SPEChpc 2021_tny_base = 15.9

SPEChpc 2021_tny_peak = 16.9

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jul-2023
Hardware Availability: Jan-2023
Software Availability: Apr-2023

Hardware Summary

Type of System:	Homogenous Cluster
Compute Node:	Intel Server D50DNP2MFALACB (Xeon 8480+)
Interconnect:	Mellanox HDR
Compute Nodes Used:	2
Total Chips:	4
Total Cores:	224
Total Threads:	448
Total Memory:	1 TB
Max. Peak Threads:	56

Software Summary

Compiler:	Intel oneAPI Compiler 2023.1.0
MPI Library:	Intel MPI Library 2021.9 for Linux OS
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	OMP
Base Ranks Run:	16
Base Threads Run:	14
Peak Parallel Models:	OMP
Minimum Peak Ranks:	4
Maximum Peak Ranks:	112
Max. Peak Threads:	56
Min. Peak Threads:	2

Node Description: Intel Server D50DNP2MFALACB (Xeon 8480+)

Hardware

Number of nodes:	2
Uses of the node:	Compute
Vendor:	Intel
Model:	Intel Server D50DNP2MFALACB (Xeon 8480+)
CPU Name:	Intel Xeon Platinum 8480+
CPU(s) orderable:	1, 2 chips
Chips enabled:	2
Cores enabled:	112
Cores per chip:	56
Threads per core:	2
CPU Characteristics:	Turbo Boost Technology up to 3.8 GHz
CPU MHz:	2000
Primary Cache:	32 KB I + 48 KB D on chip per core
Secondary Cache:	2 MB I+D on chip per core
L3 Cache:	105 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B)
Disk Subsystem:	1 x 1 TB NVMe U.2 2.5" SSD
Other Hardware:	None
Accel Count:	None
Accel Model:	None
Accel Vendor:	None
Accel Type:	None
Accel Connection:	None
Accel ECC enabled:	None
Accel Description:	None
Adapter:	Mellanox ConnectX-6 HDR
Number of Adapters:	1
Slot Type:	PCI-Express 4.0 x16
Data Rate:	200Gbit/s
Ports Used:	1
Interconnect Type:	Mellanox HDR

Software

Accelerator Driver:	None
Adapter:	Mellanox ConnectX-6 HDR
Adapter Driver:	5.9-0.5.5
Adapter Firmware:	20.36.1010
Operating System:	Rocky Linux 8.7 (Green Obsidian) 4.18.0-372.32.1.el8_6.crt3.x86_64
Local File System:	NFS
Shared File System:	PANASAS FS
System State:	Multi-user
Other Software:	None

Interconnect Description: Mellanox HDR

Hardware

Vendor:	Mellanox
Model:	Mellanox HDR
Switch Model:	Mellanox MQM8790-HS2F Quantum HDR InfiniBand Switch
Number of Switches:	18
Number of Ports:	40
Data Rate:	200 Gbit/s
Firmware:	20.36.1010
Topology:	Fat-tree
Primary Use:	MPI Traffic

Software

: --

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
The PANASAS filesystem as described on this result page was formerly
generally available.  At the time of this publication, it may
not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the
SPEC HPG Policy document, http://www.spec.org/hpg/policy.html
```

Compiler Version Notes

```
==============================================================================
 CXXC 532.sph_exa_t(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2023.1.0 (2023.1.0.20230320)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir:
  /global/panfs01/admin/opt/intel/oneAPI/2023.1.0.46401/compiler/2023.1.0/linux/bin-llvm
Configuration file:
  /global/panfs01/admin/opt/intel/oneAPI/2023.1.0.46401/compiler/2023.1.0/linux/bin-llvm/../bin/icpx.cfg
------------------------------------------------------------------------------

==============================================================================
 CC  505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base)
      521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2023.1.0 (2023.1.0.20230320)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir:
  /global/panfs01/admin/opt/intel/oneAPI/2023.1.0.46401/compiler/2023.1.0/linux/bin-llvm
Configuration file:
  /global/panfs01/admin/opt/intel/oneAPI/2023.1.0.46401/compiler/2023.1.0/linux/bin-llvm/../bin/icx.cfg
------------------------------------------------------------------------------

==============================================================================
 CC  518.tealeaf_t(peak)
------------------------------------------------------------------------------
icc: remark #10441: The Intel(R) C++ Compiler Classic (ICC) is deprecated and
  will be removed from product release in the second half of 2023. The
  Intel(R) oneAPI DPC++/C++ Compiler (ICX) is the recommended compiler moving
  forward. Please transition to use this compiler. Use '-diag-disable=10441'
  to disable this message.
icc: command line warning #10148: option
  '-Wno-incompatible-function-pointer-types' not supported
icc (ICC) 2021.9.0 20230302
Copyright (C) 1985-2023 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  519.clvleaf_t(peak)
------------------------------------------------------------------------------
ifort (IFORT) 2021.9.0 20230302
Copyright (C) 1985-2023 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  519.clvleaf_t(base) 528.pot3d_t(base, peak) 535.weather_t(base, peak)
------------------------------------------------------------------------------
ifx (IFX) 2023.1.0 20230320
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`mpiicc -cc=icx`

C++ benchmarks:
`mpiicpc -cxx=icpx`

Fortran benchmarks:
`mpiifort -fc=ifx`

Base Portability Flags

505.lbm_t: `-lstdc++ -std=c++14`
513.soma_t: `-lstdc++ -std=c++14`
518.tealeaf_t: `-lstdc++ -std=c++14`
521.miniswp_t: `-lstdc++ -std=c++14`
534.hpgmgfv_t: `-lstdc++ -std=c++14`

Base Optimization Flags

C benchmarks:
`-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto -funroll-loops`

C++ benchmarks:
`-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto -funroll-loops`

Fortran benchmarks:
`-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto -funroll-loops -nostandard-realloc-lhs -align array64byte`

Base Other Flags

C benchmarks (except as noted below):
`-Ispecmpitime -Wno-incompatible-function-pointer-types`

521.miniswp_t: `-Ispecmpitime/ -Wno-incompatible-function-pointer-types`

534.hpgmgfv_t: `-Ispecmpitime -Wno-incompatible-function-pointer-types`

C++ benchmarks:
`-Ispecmpitime`

Fortran benchmarks:

519.clvleaf_t: `-Ispecmpitime`

Peak Compiler Invocation

C benchmarks (except as noted below):
`mpiicc -cc=icx`

518.tealeaf_t: `mpiicc`

C++ benchmarks:
`mpiicpc -cxx=icpx`

Fortran benchmarks (except as noted below):
`mpiifort -fc=ifx`

519.clvleaf_t: `mpiifort`

Peak Portability Flags

505.lbm_t: `-lstdc++ -std=c++14`
513.soma_t: `-lstdc++ -std=c++14`
518.tealeaf_t: `-lstdc++ -std=c++14`
521.miniswp_t: `-lstdc++ -std=c++14`
534.hpgmgfv_t: `-lstdc++ -std=c++14`

Peak Optimization Flags

C benchmarks:

505.lbm_t: `-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto -funroll-loops`

513.soma_t: `Same as 505.lbm_t`

518.tealeaf_t: `-O3 -Ofast -xCORE-AVX512 -ansi-alias -qopenmp -ipo -qopt-zmm-usage=high -qopt-multiple-gather-scatter-by-shuffles`

521.miniswp_t: `basepeak = yes`

534.hpgmgfv_t: `Same as 505.lbm_t`

C++ benchmarks:
`-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto`

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks (continued):
`-funroll-loops`

Fortran benchmarks:

519.clvleaf_t: `-O3 -Ofast -xCORE-AVX512 -ansi-alias -qopenmp -ipo -qopt-zmm-usage=high -qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs -align array64byte`

528.pot3d_t: `-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto -funroll-loops -nostandard-realloc-lhs -align array64byte`

535.weather_t: `Same as 528.pot3d_t`

Peak Other Flags

C benchmarks (except as noted below):
`-Ispecmpitime -Wno-incompatible-function-pointer-types`

521.miniswp_t: `-Ispecmpitime/ -Wno-incompatible-function-pointer-types`

534.hpgmgfv_t: `-Ispecmpitime  -Wno-incompatible-function-pointer-types`

C++ benchmarks:
`-Ispecmpitime`

Fortran benchmarks:

519.clvleaf_t: `-Ispecmpitime`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-08-16.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-08-16.xml`

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2023-07-07 20:28:53-0400.
Report generated on 2023-08-16 15:01:49 by hpc2021 PS formatter v1.0.3.
Originally published on 2023-08-16.