SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-741GE-TNRT (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 10.9

SPEChpc 2021_tny_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Oct-2023

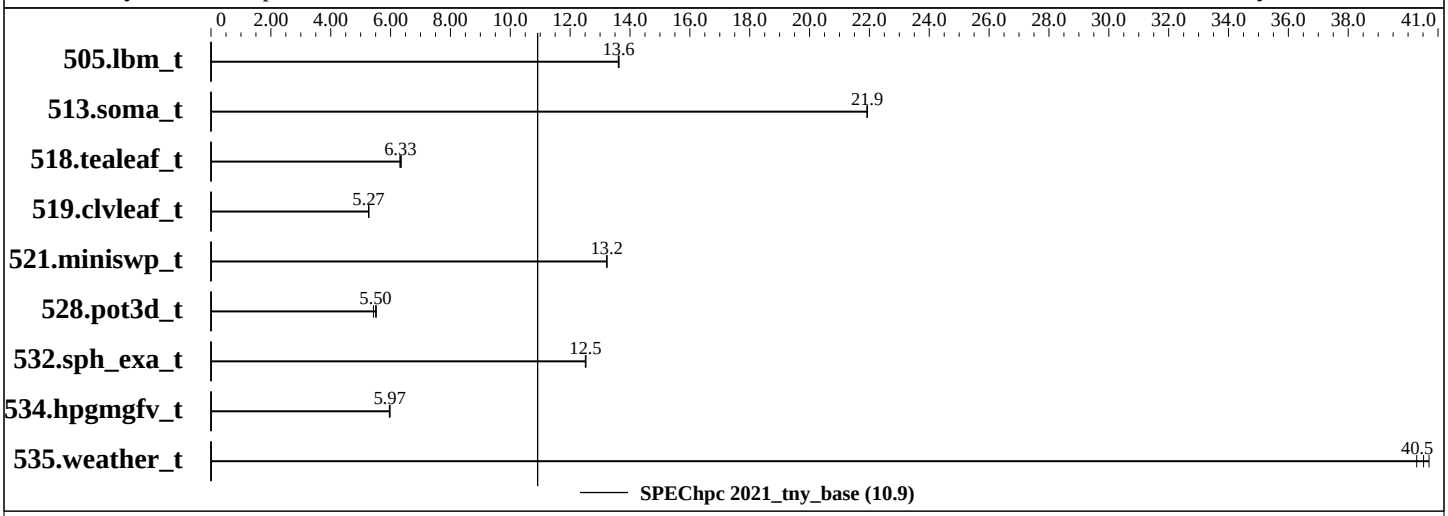

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	4	64	165	13.6	165	13.6	**165**	**13.6**									
513.soma_t	OMP	4	64	169	21.9	169	21.9	**169**	**21.9**									
518.tealeaf_t	OMP	4	64	**261**	**6.33**	260	6.36	261	6.31									
519.clvleaf_t	OMP	4	64	313	5.28	**313**	**5.27**	314	5.26									
521.miniswp_t	OMP	4	64	121	13.2	121	13.2	**121**	**13.2**									
528.pot3d_t	OMP	4	64	**386**	**5.50**	385	5.52	392	5.43									
532.sph_exa_t	OMP	4	64	156	12.5	156	12.5	**156**	**12.5**									
534.hpgmgfv_t	OMP	4	64	**197**	**5.97**	196	5.98	197	5.96									
535.weather_t	OMP	4	64	**79.6**	**40.5**	79.2	40.7	80.0	40.3									

SPEChpc 2021_tny_base = **10.9**

SPEChpc 2021_tny_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Tiny Result

Copyright 2021-2024 Standard Performance Evaluation Corporation

Supermicro

GPU SuperServer SYS-741GE-TNRT (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 10.9

SPEChpc 2021_tny_peak = Not Run

hpc2021 License: 6569
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2023
Hardware Availability: Dec-2023
Software Availability: Oct-2023

Hardware Summary

Type of System:	Homogenous
Compute Node:	GPU SuperServer SYS-741GE-TNRT
Interconnect:	None
Compute Nodes Used:	1
Total Chips:	2
Total Cores:	128
Total Threads:	256
Total Memory:	1 TB
Max. Peak Threads:	--

Software Summary

Compiler:	C/C++/Fortran: Version 2024.0.0 of Intel oneAPI Compiler
MPI Library:	Intel MPI Library for Linux* OS, Version 2021.11 Build 20231005
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	OMP
Base Ranks Run:	4
Base Threads Run:	64
Peak Parallel Models:	Not Run
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--
Max. Peak Threads:	--
Min. Peak Threads:	--

Node Description: GPU SuperServer SYS-741GE-TNRT

Hardware

Number of nodes:	1
Uses of the node:	compute
Vendor:	Supermicro
Model:	GPU SuperServer SYS-741GE-TNRT
CPU Name:	Intel Xeon Platinum 8592+
CPU(s) orderable:	2 chips
Chips enabled:	2
Cores enabled:	128
Cores per chip:	64
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.9 GHz
CPU MHz:	1900
Primary Cache:	32 KB I + 48 KB D on chip per core
Secondary Cache:	2 MB I+D on chip per core
L3 Cache:	320 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Disk Subsystem:	1 x 512 GB M.2 NVMe SSD
Other Hardware:	None
Accel Count:	0
Accel Model:	None
Accel Vendor:	None
Accel Type:	None
Accel Connection:	None
Accel ECC enabled:	None
Accel Description:	None
Adapter:	None
Number of Adapters:	0
Slot Type:	None
Data Rate:	None

(Continued on next page)

Software

Accelerator Driver:	--
Adapter:	None
Adapter Driver:	None
Adapter Firmware:	None
Operating System:	SUSE Linux Enterprise Server 15 SP5 Kernel 5.14.21-150500.53-default
Local File System:	xfs
Shared File System:	None
System State:	Multi-user, run level 3
Other Software:	None

Node Description: GPU SuperServer SYS-741GE-TNRT

Hardware (Continued)

Ports Used: 0
Interconnect Type: None

Interconnect Description: None

Hardware

Vendor: None
Model: None
Switch Model: None
Number of Switches: 0
Number of Ports: 0
Data Rate: None
Firmware: None
Topology: None
Primary Use: None

Software

: --

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
MPI startup command:
  mpirun command (mpiexec.hydra) was used to start MPI jobs.
```

Compiler Version Notes

```
==============================================================================
 CXXC 532.sph_exa_t(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2024.0.0 (2024.0.0.20231017)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/intel/oneapi/compiler/2024.0/bin/compiler
Configuration file: /opt/intel/oneapi/compiler/2024.0/bin/compiler/../icpx.cfg
------------------------------------------------------------------------------

==============================================================================
 CC  505.lbm_t(base) 513.soma_t(base) 518.tealeaf_t(base) 521.miniswp_t(base)
      534.hpgmgfv_t(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2024.0.0 (2024.0.0.20231017)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/intel/oneapi/compiler/2024.0/bin/compiler
Configuration file: /opt/intel/oneapi/compiler/2024.0/bin/compiler/../icx.cfg
------------------------------------------------------------------------------

==============================================================================
 FC  519.clvleaf_t(base) 535.weather_t(base)
------------------------------------------------------------------------------
ifx (IFX) 2024.0.0 20231017
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  528.pot3d_t(base)
------------------------------------------------------------------------------
ifx: command line warning #10157: ignoring option '-W'; argument is of wrong
  type
ifx (IFX) 2024.0.0 20231017
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`mpiicc -cc=icx`

C++ benchmarks:
`mpiicpc -cxx=icpx`

Fortran benchmarks:
`mpiifort -fc=ifx`

Base Portability Flags

505.lbm_t: `-lstdc++`
513.soma_t: `-lstdc++ -DSPEC_NO_VAR_ARRAY_REDUCE`
518.tealeaf_t: `-lstdc++`
519.clvleaf_t: `-lstdc++`
521.miniswp_t: `-lstdc++`
528.pot3d_t: `-lstdc++`
532.sph_exa_t: `-lstdc++`
534.hpgmgfv_t: `-lstdc++`

(Continued on next page)

Base Portability Flags (Continued)

535.weather_t: `-lstdc++`

Base Optimization Flags

C benchmarks:
`-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp -ansi-alias`

C++ benchmarks:
`-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp -ansi-alias`

Fortran benchmarks:
`-Ofast -ipo -xCORE-AVX512 -mprefer-vector-width=512 -fiopenmp -nostandard-realloc-lhs -align array64byte`

Base Other Flags

Fortran benchmarks:

528.pot3d_t: `-Wno-incompatible-function-pointer-types`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-06-05.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-06-05.xml`

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.8 on 2023-12-01 01:01:34-0500.
Report generated on 2024-01-03 17:49:49 by hpc2021 PS formatter v1.0.3.
Originally published on 2024-01-03.