SPEChpc™ 2021 Tiny Result

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: NVIDIA Corporation)

GIGA-BYTE G242-P31 (Ampere Altra Q80-33, Tesla A100-PCIE-40GB)

SPEChpc 2021_tny_base = 19.8

SPEChpc 2021_tny_peak = 23.9

hpc2021 License: 019
Test Sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test Date: Sep-2021
Hardware Availability: Jun-2021
Software Availability: Sep-2021

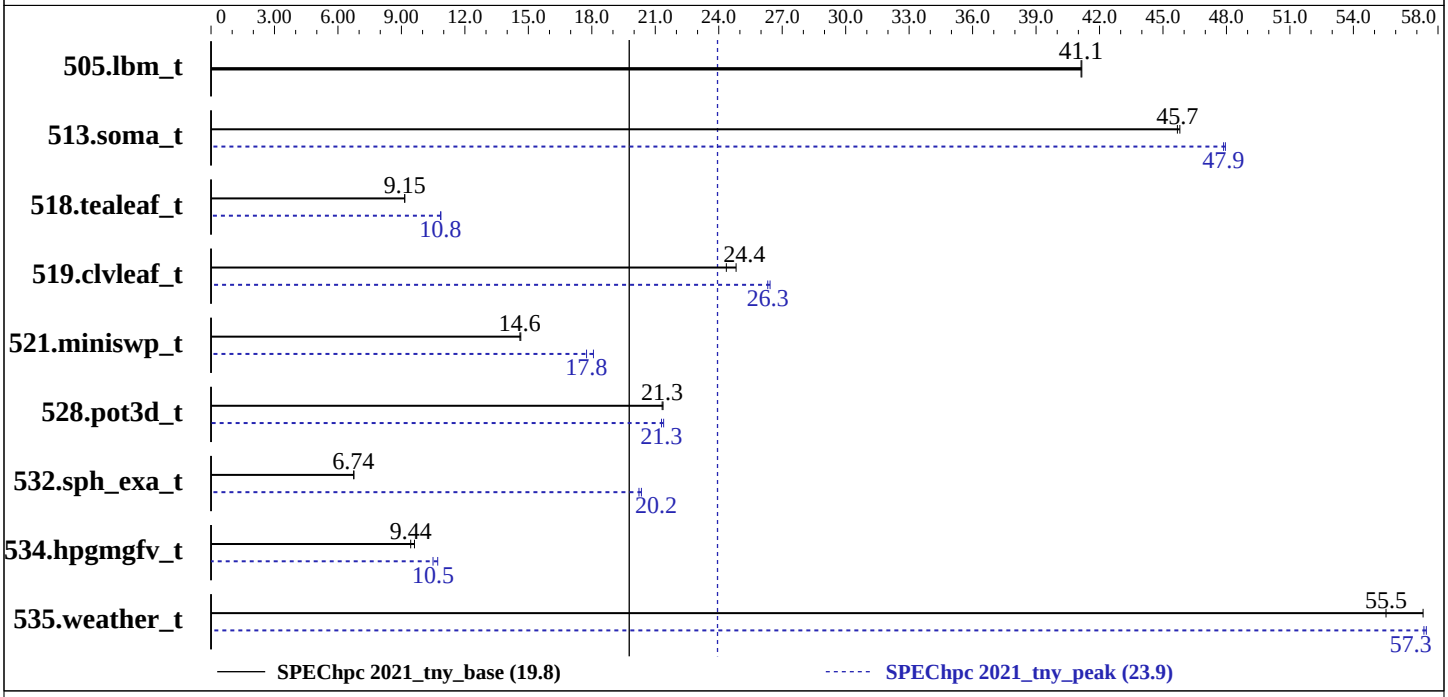

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	ACC	2	1	**54.7**	**41.1**	54.7	41.2			ACC	2	1	**54.7**	**41.1**	54.7	41.2		
513.soma_t	ACC	2	1	80.8	45.8	**81.0**	**45.7**			ACC	2	1	77.2	48.0	**77.3**	**47.9**		
518.tealeaf_t	ACC	2	1	**180**	**9.15**	180	9.16			ACC	2	1	**152**	**10.8**	152	10.9		
519.clvleaf_t	ACC	2	1	66.5	24.8	**67.7**	**24.4**			ACC	2	1	**62.7**	**26.3**	62.4	26.4		
521.miniswp_t	ACC	2	1	109	14.6	**110**	**14.6**			ACC	2	1	88.5	18.1	**90.1**	**17.8**		
528.pot3d_t	ACC	2	1	99.5	21.4	**99.6**	**21.3**			ACC	2	1	99.3	21.4	**99.8**	**21.3**		
532.sph_exa_t	ACC	2	1	**289**	**6.74**	289	6.76			ACC	16	1	95.8	20.3	**96.4**	**20.2**		
534.hpgmgfv_t	ACC	2	1	**124**	**9.44**	122	9.62			ACC	2	1	110	10.7	**112**	**10.5**		
535.weather_t	ACC	2	1	**58.1**	**55.5**	56.3	57.3			ACC	2	1	56.1	57.4	**56.2**	**57.3**		

SPEChpc 2021_tny_base = 19.8

SPEChpc 2021_tny_peak = 23.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Tiny Result

GIGA-BYTE TECHNOLOGY CO., LTD

(Test Sponsor: NVIDIA Corporation)

GIGA-BYTE G242-P31 (Ampere Altra Q80-33, Tesla A100-PCIE-40GB)

SPEChpc 2021_tny_base = 19.8

SPEChpc 2021_tny_peak = 23.9

hpc2021 License: 019
Test Sponsor: NVIDIA Corporation
Tested by: NVIDIA Corporation

Test Date: Sep-2021
Hardware Availability: Jun-2021
Software Availability: Sep-2021

Hardware Summary

Type of System:	SMP
Compute Node:	Ampere Altra
Interconnect:	None
Compute Nodes Used:	1
Total Chips:	1
Total Cores:	80
Total Threads:	80
Total Memory:	256 GB
Max. Peak Threads:	1

Software Summary

Compiler:	C/C++/Fortran: Version 21.9 of NVIDIA HPC SDK for Linux
MPI Library:	OpenMPI Version 4.0.5, included with NVHPC SDK
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	ACC
Base Ranks Run:	2
Base Threads Run:	1
Peak Parallel Models:	ACC
Minimum Peak Ranks:	2
Maximum Peak Ranks:	16
Max. Peak Threads:	1
Min. Peak Threads:	1

Node Description: Ampere Altra

Hardware

Number of nodes:	1
Uses of the node:	compute
Vendor:	GIGA-BYTE TECHNOLOGY CO., LTD
Model:	G242-P31
CPU Name:	Ampere Altra Q80-33
CPU(s) orderable:	1 chips
Chips enabled:	1
Cores enabled:	80
Cores per chip:	80
Threads per core:	1
CPU Characteristics:	Max Frequency 3300Mhz
CPU MHz:	3000
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	32 MB I+D on chip per core
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem:	1 x 960 GB, NVME, M.2, PCIe Gen3
Other Hardware:	None
Accel Count:	2
Accel Model:	Tesla A100-PCIE-40GB
Accel Vendor:	NVIDIA Corporation
Accel Type:	GPU
Accel Connection:	PCIe 3.0 16x
Accel ECC enabled:	Yes
Accel Description:	See Notes
Adapter:	None
Number of Adapters:	0
Slot Type:	None
Data Rate:	None
Ports Used:	0

(Continued on next page)

Software

Accelerator Driver:	NVIDIA UNIX aarch64 Kernel Module 460.32.03
Adapter:	None
Adapter Driver:	None
Adapter Firmware:	None
Operating System:	CentOS 8.3-2011
Local File System:	xfs
Shared File System:	None
System State:	Multi-user, run level 3
Other Software:	None

Node Description: Ampere Altra

Hardware (Continued)

Interconnect Type: None

Interconnect Description: None

Hardware

Vendor:	N/A
Model:	N/A
Switch Model:	N/A
Number of Switches:	0
Number of Ports:	0
Data Rate:	0
Firmware:	0
Topology:	N/A
Primary Use:	N/A

Software

: --

Submit Notes

```
The config file option 'submit' was used.
 MPI startup command:
   mpirun command was used to start MPI jobs.
```

Platform Notes

```
 Information from nvaccelinfo
 CUDA Driver Version:           11020
 NVRM version:                  NVIDIA UNIX aarch64 Kernel Module 460.32.03
 Device Number:                 0
 Device Name:                   A100-PCIE-40GB
 Device Revision Number:        8.0
 Global Memory Size:            42505273344
 Number of Multiprocessors:     108
 Concurrent Copy and Execution: Yes
 Total Constant Memory:         65536
 Total Shared Memory per Block: 49152
 Registers per Block:           65536
 Warp Size:                     32
 Maximum Threads per Block:     1024
 Maximum Block Dimensions:      1024, 1024, 64
 Maximum Grid Dimensions:       2147483647 x 65535 x 65535
 Maximum Memory Pitch:          2147483647B
 Texture Alignment:             512B
```

(Continued on next page)

Platform Notes (Continued)

```
 Clock Rate:                    1410 MHz
 Execution Timeout:             No
 Integrated Device:             No
 Can Map Host Memory:           Yes
 Compute Mode:                  default
 Concurrent Kernels:            Yes
 ECC Enabled:                   Yes
 Memory Clock Rate:             1215 MHz
 Memory Bus Width:              5120 bits
 L2 Cache Size:                 41943040 bytes
 Max Threads Per SMP:           2048
 Async Engines:                 3
 Unified Addressing:            Yes
 Managed Memory:                Yes
 Concurrent Managed Memory:     Yes
 Preemption Supported:          Yes
 Cooperative Launch:            Yes
   Multi-Device:                Yes
 Default Target:                cc80
```

Compiler Version Notes

```
==============================================================================
 CC  505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)
     521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)
------------------------------------------------------------------------------
nvc 21.9-0 linuxarm64 target on aarch64 Linux
NVIDIA Compilers and Tools
Copyright (c) 2021, NVIDIA CORPORATION & AFFILIATES.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 CXXC 532.sph_exa_t(base, peak)
------------------------------------------------------------------------------
nvc++ 21.9-0 linuxarm64 target on aarch64 Linux
NVIDIA Compilers and Tools
Copyright (c) 2021, NVIDIA CORPORATION & AFFILIATES.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base,
     peak)
------------------------------------------------------------------------------
nvfortran 21.9-0 linuxarm64 target on aarch64 Linux
NVIDIA Compilers and Tools
Copyright (c) 2021, NVIDIA CORPORATION & AFFILIATES.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:
mpicc

C++ benchmarks:
mpicxx

Fortran benchmarks:
mpif90

Base Portability Flags

532.sph_exa_t: --c++17

Base Optimization Flags

C benchmarks:
-Mfprelaxed -Mnouniform -Mstack_arrays -fast -acc=gpu

C++ benchmarks:
-Mfprelaxed -Mnouniform -Mstack_arrays -fast -acc=gpu

Fortran benchmarks:
-Mfprelaxed -Mnouniform -Mstack_arrays -fast -acc=gpu

Base Other Flags

C benchmarks:
-w

C++ benchmarks:
-w

Fortran benchmarks:
-w

Peak Compiler Invocation

C benchmarks:
`mpicc`

C++ benchmarks:
`mpicxx`

Fortran benchmarks:
`mpif90`

Peak Optimization Flags

C benchmarks:

505.lbm_t: `basepeak = yes`

513.soma_t: `-fast -O3 -acc=gpu -gpu=pinned`

518.tealeaf_t: `-fast -Msafeptr -acc=gpu`

521.miniswp_t: `-Mfprelaxed -Mnouniform -Mstack_arrays -fast -acc=gpu -gpu=pinned`

534.hpgmgfv_t: `-fast -acc=gpu -gpu=pinned -static-nvidia`

C++ benchmarks:
`-Mfprelaxed -Mnouniform -Mstack_arrays -fast -acc=gpu`

Fortran benchmarks:

519.clvleaf_t: `-Mfprelaxed -fast -acc=gpu -gpu=pinned`

528.pot3d_t: `-Mstack_arrays -fast -acc=gpu`

535.weather_t: `-Mfprelaxed -Mnouniform -Mstack_arrays -fast -acc=gpu`

Peak Other Flags

C benchmarks:
`-w`

C++ benchmarks:
`-w`

(Continued on next page)

Peak Other Flags (Continued)

Fortran benchmarks:
`-w`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/nv2021_flags_v1.0.3.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/nv2021_flags_v1.0.3.xml`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.0.2 on 2021-09-13 19:11:37-0400.
Report generated on 2021-10-20 15:39:28 by hpc2021 PDF formatter v1.0.3.
Originally published on 2021-10-20.