SPEChpc™ 2021 Large Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Texas Advanced Computing Center)

Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)

SPEChpc 2021_lrg_base = 31.2

SPEChpc 2021_lrg_peak = Not Run

hpc2021 License: 6340
Test Sponsor: Texas Advanced Computing Center
Tested by: Texas Advanced Computing Center

Test Date: Sep-2021
Hardware Availability: Jun-2019
Software Availability: Dec-2020

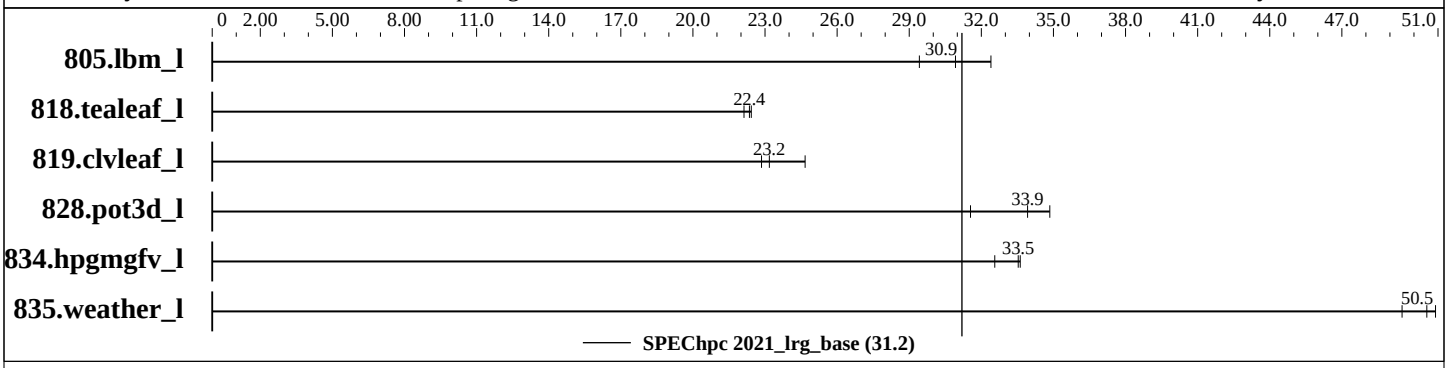

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
805.lbm_l	OMP	4096	27	84.1	32.4	**88.1**	**30.9**	92.6	29.4									
818.tealeaf_l	OMP	4096	27	**64.9**	**22.4**	65.5	22.1	64.6	22.4									
819.clvleaf_l	OMP	4096	27	**90.6**	**23.2**	91.9	22.9	85.1	24.7									
828.pot3d_l	OMP	4096	27	131	34.8	144	31.5	**134**	**33.9**									
834.hpgmgfv_l	OMP	4096	27	103	32.6	**99.9**	**33.5**	99.6	33.6									
835.weather_l	OMP	4096	27	67.3	50.9	**67.8**	**50.5**	69.2	49.5									

SPEChpc 2021_lrg_base = 31.2

SPEChpc 2021_lrg_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Large Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Texas Advanced Computing Center)

Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)

SPEChpc 2021_lrg_base = 31.2

SPEChpc 2021_lrg_peak = Not Run

hpc2021 License: 6340
Test Sponsor: Texas Advanced Computing Center
Tested by: Texas Advanced Computing Center

Test Date: Sep-2021
Hardware Availability: Jun-2019
Software Availability: Dec-2020

Hardware Summary

Type of System:	Homogenous Cluster
Compute Node:	PowerEdge C6420
Interconnect:	InfiniBand
Compute Nodes Used:	2048
Total Chips:	4096
Total Cores:	114688
Total Threads:	114688
Total Memory:	384 TB
Max. Peak Threads:	--

Software Summary

Compiler:	C/C++/Fortran: Version 2020 Update 4 of Intel Compilers for Linux
MPI Library:	Intel MPI Library 2019 Update 9 for Linux
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	OMP
Base Ranks Run:	4096
Base Threads Run:	27
Peak Parallel Models:	Not Run
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--
Max. Peak Threads:	--
Min. Peak Threads:	--

Node Description: PowerEdge C6420

Hardware

Number of nodes:	2048
Uses of the node:	compute
Vendor:	Dell Inc.
Model:	PowerEdge C6420
CPU Name:	Intel Xeon Platinum 8280
CPU(s) orderable:	1 chips
Chips enabled:	2
Cores enabled:	56
Cores per chip:	28
Threads per core:	1
CPU Characteristics:	Turbo up to 4.0 GHz
CPU MHz:	2700
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	38.5 MB I+D on chip per chip
Other Cache:	None
Memory:	192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)
Disk Subsystem:	1x 240GB SATA SSD
Other Hardware:	None
Accel Count:	--
Accel Model:	
Accel Vendor:	--
Accel Type:	--
Accel Connection:	--
Accel ECC enabled:	
Accel Description:	
Adapter:	NVIDIA ConnectX-6 VPI Infiniband Adapter Card
Number of Adapters:	1
Slot Type:	PCIe 3.0 x16
Data Rate:	100Gb/s
Ports Used:	1

(Continued on next page)

Software

Accelerator Driver:	--
Adapter:	NVIDIA ConnectX-6 VPI Infiniband Adapter Card
Adapter Driver:	5.1-2.5.8.0
Adapter Firmware:	20.25.7020
Operating System:	CentOS Linux release 7.8.2003 3.10.0-1127.19.1.el7.x86_64
Local File System:	xfs
Shared File System:	10.6 PB Lustre (DDN SFA18K) over Infiniband HDR100
System State:	Multi-user, run level 3
Other Software:	None

Node Description: PowerEdge C6420

Hardware (Continued)

Interconnect Type: Infiniband HDR100

Interconnect Description: InfiniBand

Hardware

Vendor:	NVIDIA
Model:	NVIDIA Infiniband HDR
Switch Model:	Quantum CS8500 HDR Modular Switch
Number of Switches:	6
Number of Ports:	600
Data Rate:	200 Gb/s
Firmware:	27.2000.1386
Switch Model:	Quantum QM8790 HDR Edge Switch
Number of Switches:	202
Number of Ports:	40
Data Rate:	200 Gb/s
Firmware:	27.2008.2102
Topology:	Fat Tree (blocking factor 22:18)
Primary Use:	MPI traffic and Lustre access

Software

: --

General Notes

```
Full HDR connectivity between switches and HDR100
connectivity to the compute nodes. Half of nodes
in a rack (44) connect to      22 downlinks of a
chassis switch as pairs of HDR100 links into
HDR200 ports of the chassis switch. The other 18
ports are uplinks to the six central switches.
```

Submit Notes

```
The config file option 'submit' was used.
    mpirun -np $ranks -ppn 2 $command
```

General Notes

```
Environment settings:
     ulimit -s unlimited
```

Compiler Version Notes

```
==============================================================================
 CC  805.lbm_l(base) 818.tealeaf_l(base) 834.hpgmgfv_l(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.3.304 Build 20200925_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
 FC  819.clvleaf_l(base) 828.pot3d_l(base) 835.weather_l(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.3.304 Build 20200925_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
mpiicc

Fortran benchmarks:
mpiifort

Base Portability Flags

805.lbm_l: -std=gnu11
818.tealeaf_l: -std=gnu11
834.hpgmgfv_l: -std=gnu11

Base Optimization Flags

C benchmarks:
-O3 -no-prec-div -fp-model fast=2 -xCORE-AVX512 -ipo -qopenmp
-ansi-alias

Fortran benchmarks:
-O3 -no-prec-div -fp-model fast=2 -xCORE-AVX512 -ipo -qopenmp

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/Intel-ic2021-official-linux64_revA.2021-10-20.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/Intel-ic2021-official-linux64_revA.2021-10-20.xml`

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.0.1 on 2021-08-23 05:12:33-0400.
Report generated on 2023-08-25 18:58:38 by hpc2021 PS formatter v1.0.3.
Originally published on 2021-10-20.