



# SPEChpc™ 2021 Large Result

Copyright 2021 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Texas Advanced Computing Center)


SPEChpc 2021\_lrg\_base = 8.47

Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)

SPEChpc 2021\_lrg\_peak = Not Run

**hpc2021 License:** 6340  
**Test Sponsor:** Texas Advanced Computing Center  
**Tested by:** Texas Advanced Computing Center

**Test Date:** Sep-2021  
**Hardware Availability:** Jun-2019  
**Software Availability:** Dec-2020

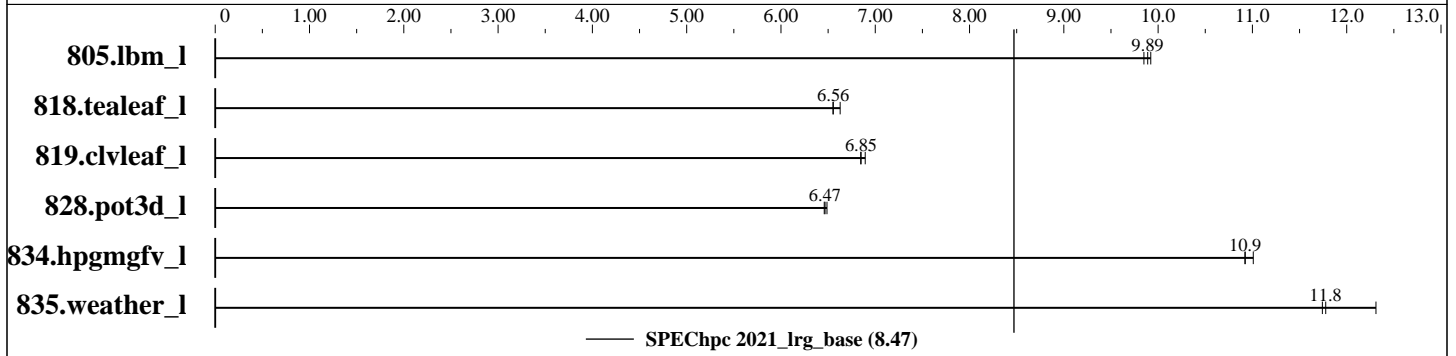

## Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
805.lbm_1	OMP	1024	27	275	9.92	277	9.85	<b>276</b>	<b>9.89</b>									
818.tealeaf_1	OMP	1024	27	221	6.55	<b>221</b>	<b>6.56</b>	219	6.63									
819.clvleaf_1	OMP	1024	27	305	6.89	307	6.85	<b>307</b>	<b>6.85</b>									
828.pot3d_1	OMP	1024	27	701	6.49	<b>704</b>	<b>6.47</b>	704	6.46									
834.hpgmgfv_1	OMP	1024	27	<b>307</b>	<b>10.9</b>	304	11.0	307	10.9									
835.weather_1	OMP	1024	27	278	12.3	<b>291</b>	<b>11.8</b>	292	11.7									

SPEChpc 2021\_lrg\_base = 8.47

SPEChpc 2021\_lrg\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEChpc™ 2021 Large Result

Copyright 2021 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Texas Advanced Computing Center)

SPEChpc 2021\_lrg\_base = 8.47

**Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)**

SPEChpc 2021\_lrg\_peak = Not Run

**hpc2021 License:** 6340  
**Test Sponsor:** Texas Advanced Computing Center  
**Tested by:** Texas Advanced Computing Center

**Test Date:** Sep-2021  
**Hardware Availability:** Jun-2019  
**Software Availability:** Dec-2020

## Hardware Summary

Type of System: Homogenous Cluster  
Compute Node: PowerEdge C6420  
Interconnect: InfiniBand  
Compute Nodes Used: 512  
Total Chips: 1024  
Total Cores: 28672  
Total Threads: 28672  
Total Memory: 96 TB  
Max. Peak Threads: --

## Software Summary

Compiler: C/C++/Fortran: Version 2020 Update 4 of Intel Compilers for Linux  
MPI Library: Intel MPI Library 2019 Update 9 for Linux  
Other MPI Info: None  
Other Software: None  
Base Parallel Model: OMP  
Base Ranks Run: 1024  
Base Threads Run: 27  
Peak Parallel Models: Not Run  
Minimum Peak Ranks: --  
Maximum Peak Ranks: --  
Max. Peak Threads: --  
Min. Peak Threads: --

## Node Description: PowerEdge C6420

### Hardware

Number of nodes: 512  
Uses of the node: compute  
Vendor: Dell Inc.  
Model: PowerEdge C6420  
CPU Name: Intel Xeon Platinum 8280  
CPU(s) orderable: 1 chips  
Chips enabled: 2  
Cores enabled: 56  
Cores per chip: 28  
Threads per core: 1  
CPU Characteristics: Turbo up to 4.0 GHz  
CPU MHz: 2700  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 38.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R)  
Disk Subsystem: 1x 240GB SATA SSD  
Other Hardware: None  
Accel Count: --  
Accel Model: --  
Accel Vendor: --  
Accel Type: --  
Accel Connection: --  
Accel ECC enabled: --  
Accel Description: --  
Adapter: NVIDIA ConnectX-6 VPI Infiniband Adapter Card  
Number of Adapters: 1  
Slot Type: PCIe 3.0 x16  
Data Rate: 100Gb/s  
Ports Used: 1

### Software

Accelerator Driver: --  
Adapter: NVIDIA ConnectX-6 VPI Infiniband Adapter Card  
Adapter Driver: 5.1-2.5.8.0  
Adapter Firmware: 20.25.7020  
Operating System: CentOS Linux release 7.8.2003  
3.10.0-1127.19.1.el7.x86\_64  
Local File System: xfs  
Shared File System: 10.6 PB Lustre (DDN SFA18K) over Infiniband HDR100  
System State: Multi-user, run level 3  
Other Software: None

(Continued on next page)



# SPEChpc™ 2021 Large Result

Copyright 2021 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Texas Advanced Computing Center)

SPEChpc 2021\_lrg\_base = 8.47

Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)

SPEChpc 2021\_lrg\_peak = Not Run

**hpc2021 License:** 6340  
**Test Sponsor:** Texas Advanced Computing Center  
**Tested by:** Texas Advanced Computing Center

**Test Date:** Sep-2021  
**Hardware Availability:** Jun-2019  
**Software Availability:** Dec-2020

## Node Description: PowerEdge C6420

### Hardware (Continued)

Interconnect Type: Infiniband HDR100

## Interconnect Description: InfiniBand

### Hardware

Vendor: NVIDIA  
Model: NVIDIA Infiniband HDR  
Switch Model: Quantum CS8500 HDR Modular Switch  
Number of Switches: 6  
Number of Ports: 600  
Data Rate: 200 Gb/s  
Firmware: 27.2000.1386  
Switch Model: Quantum QM8790 HDR Edge Switch  
Number of Switches: 202  
Number of Ports: 40  
Data Rate: 200 Gb/s  
Firmware: 27.2008.2102  
Topology: Fat Tree (blocking factor 22:18)  
Primary Use: MPI traffic and Lustre access

### Software

: --

## General Notes

Full HDR connectivity between switches and HDR100 connectivity to the compute nodes. Half of nodes in a rack (44) connect to 22 downlinks of a chassis switch as pairs of HDR100 links into HDR200 ports of the chassis switch. The other 18 ports are uplinks to the six central switches.

## Submit Notes

The config file option 'submit' was used.  
mpirun -np \$ranks -ppn 2 \$command

## General Notes

Environment settings:  
ulimit -s unlimited



# SPEChpc™ 2021 Large Result

Copyright 2021 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Texas Advanced Computing Center)

SPEChpc 2021\_lrg\_base = 8.47

**Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)**

SPEChpc 2021\_lrg\_peak = Not Run

**hpc2021 License:** 6340  
**Test Sponsor:** Texas Advanced Computing Center  
**Tested by:** Texas Advanced Computing Center

**Test Date:** Sep-2021  
**Hardware Availability:** Jun-2019  
**Software Availability:** Dec-2020

## Compiler Version Notes

=====  
CC 805.lbm\_l(base) 818.tealeaf\_l(base) 834.hpgmgfv\_l(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.3.304 Build 20200925\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
FC 819.clvleaf\_l(base) 828.pot3d\_l(base) 835.weather\_l(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.3.304 Build 20200925\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:  
mpicc

Fortran benchmarks:  
mpiifort

## Base Portability Flags

805.lbm\_l: -std=gnull  
818.tealeaf\_l: -std=gnull  
834.hpgmgfv\_l: -std=gnull

## Base Optimization Flags

C benchmarks:  
-O3 -no-prec-div -fp-model fast=2 -xCORE-AVX512 -ipo -qopenmp  
-ansi-alias

Fortran benchmarks:  
-O3 -no-prec-div -fp-model fast=2 -xCORE-AVX512 -ipo -qopenmp



# SPEChpc™ 2021 Large Result

Copyright 2021 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Texas Advanced Computing Center)

SPEChpc 2021\_lrg\_base = 8.47

**Frontera: PowerEdge C6420 (Intel Xeon Platinum 8280)**

SPEChpc 2021\_lrg\_peak = Not Run

**hpc2021 License:** 6340  
**Test Sponsor:** Texas Advanced Computing Center  
**Tested by:** Texas Advanced Computing Center

**Test Date:** Sep-2021  
**Hardware Availability:** Jun-2019  
**Software Availability:** Dec-2020

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/hpc2021/flags/Intel-ic2021-official-linux64\\_revA.2021-10-20.00.html](http://www.spec.org/hpc2021/flags/Intel-ic2021-official-linux64_revA.2021-10-20.00.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/hpc2021/flags/Intel-ic2021-official-linux64\\_revA.2021-10-20.00.xml](http://www.spec.org/hpc2021/flags/Intel-ic2021-official-linux64_revA.2021-10-20.00.xml)

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEChpc2021 v1.0.2 on 2021-09-19 15:23:42-0400.  
Report generated on 2021-10-20 15:39:27 by hpc2021 PDF formatter v1.0.3.  
Originally published on 2021-10-20.