



# SPEC® OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## SGI

SPECompG\_peak2012 = Not Run

SGI UV 2000 (Intel Xeon E5-4650 2.7GHz)

SPECompG\_base2012 = 54.5

OMP2012 license:14


Test sponsor: SGI

Tested by: SGI

Test date: Oct-2012

Hardware Availability: Jun-2012

Software Availability: Aug-2012

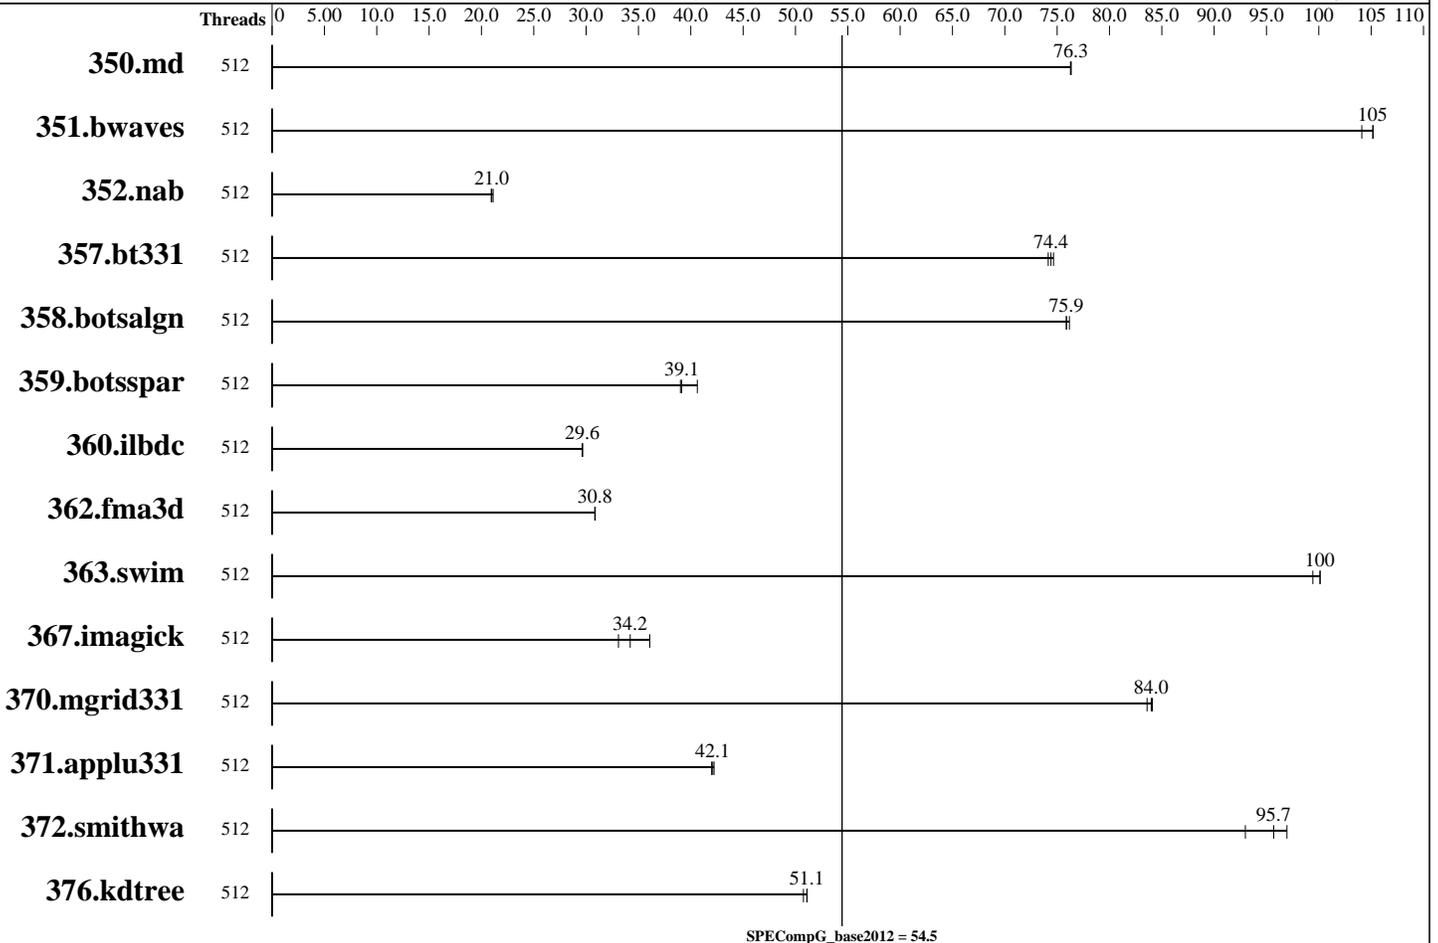

### Hardware

CPU Name: Intel Xeon E5-4650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2700  
 CPU MHz Maximum: 3300  
 FPU: Integrated  
 CPU(s) enabled: 512 cores, 64 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2-256 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 TB (512 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 14.4 TB RAID 6  
 48 x 300 GB SAS (HITACHI - ULTRASTAR C10K600 SAS-6GBITS 10000RPM)  
 Other Hardware: None

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP2 3.0.26-0.7-default #1 SMP  
 Compiler: C/C++/Fortran: Version 13.0 of Intel Composer XE 2013 Build 20120731;  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 ( Multi-user )  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: SGI Accelerate 1.4, Build 706r14.sles11sp2-1204092008  
 SGI Foundation Software 2.6, Build 706r14.sles11sp2-1204092008



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## SGI

SPECompG\_peak2012 = Not Run

SGI UV 2000 (Intel Xeon E5-4650 2.7GHz)

SPECompG\_base2012 = 54.5

OMP2012 license:14

Test date: Oct-2012

Test sponsor: SGI

Hardware Availability: Jun-2012

Tested by: SGI

Software Availability: Aug-2012

Base Threads Run: 512

Minimum Peak Threads: --

Maximum Peak Threads: --

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	512	60.7	76.3	<u>60.7</u>	<u>76.3</u>	60.7	76.3							
351.bwaves	512	43.5	104	<u>43.1</u>	<u>105</u>	43.1	105							
352.nab	512	<u>185</u>	<u>21.0</u>	186	20.9	184	21.1							
357.bt331	512	<u>63.7</u>	<u>74.4</u>	63.5	74.7	63.9	74.1							
358.botsalgn	512	<u>57.3</u>	<u>75.9</u>	57.3	75.9	57.1	76.2							
359.botsspar	512	129	40.6	<u>134</u>	<u>39.1</u>	135	39.0							
360.ilbdc	512	120	29.7	<u>120</u>	<u>29.6</u>	120	29.6							
362.fma3d	512	<u>123</u>	<u>30.8</u>	123	30.9	123	30.8							
363.swim	512	45.2	100	<u>45.3</u>	<u>100</u>	45.6	99.4							
367.imagick	512	195	36.1	212	33.1	<u>205</u>	<u>34.2</u>							
370.mgrid331	512	<u>52.6</u>	<u>84.0</u>	52.6	84.1	52.9	83.6							
371.applu331	512	144	42.2	<u>144</u>	<u>42.1</u>	144	42.0							
372.smithwa	512	<u>56.0</u>	<u>95.7</u>	55.3	97.0	57.6	93.0							
376.kdtree	512	<u>88.1</u>	<u>51.1</u>	88.6	50.8	88.0	51.1							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 For all benchmarks, threads were bound to cores using the following submit command:

```
dplace -x2 $command
```

This binds threads in order of creation, beginning with the master thread on logical cpu 0, the first slave thread on logical cpu 1, and so on. The -x2 flag instructs dplace to skip placement of the lightweight OpenMP monitor thread, which is created prior to the slave threads.

## Operating System Notes

Software Environment:

```
export KMP_AFFINITY=disabled
export KMP_STACKSIZE=200M
export KMP_SCHEDULE=static,balanced
export OMP_DYNAMIC FALSE
limit -s unlimited
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## SGI

SPECompG\_peak2012 = Not Run

SGI UV 2000 (Intel Xeon E5-4650 2.7GHz)

SPECompG\_base2012 = 54.5

OMP2012 license:14

Test sponsor: SGI

Tested by: SGI

Test date: Oct-2012

Hardware Availability: Jun-2012

Software Availability: Aug-2012

## Operating System Notes (Continued)

Hyperthreading is enabled but not used on the system.

## Platform Notes

Sysinfo program /store/hfeng/omp2012/1.0/Docs/sysinfo  
\$Rev: 395 \$ \$Date:: 2012-07-25 #\$ 8f8c0fe9e19c658963ale67685e50647  
running on cy022-sys Tue Oct 23 03:06:18 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
64 "physical id"s (chips)
1024 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
physical 4: cores 0 1 2 3 4 5 6 7
physical 5: cores 0 1 2 3 4 5 6 7
physical 6: cores 0 1 2 3 4 5 6 7
physical 7: cores 0 1 2 3 4 5 6 7
physical 8: cores 0 1 2 3 4 5 6 7
physical 9: cores 0 1 2 3 4 5 6 7
physical 10: cores 0 1 2 3 4 5 6 7
physical 11: cores 0 1 2 3 4 5 6 7
physical 12: cores 0 1 2 3 4 5 6 7
physical 13: cores 0 1 2 3 4 5 6 7
physical 14: cores 0 1 2 3 4 5 6 7
physical 15: cores 0 1 2 3 4 5 6 7
physical 16: cores 0 1 2 3 4 5 6 7
physical 17: cores 0 1 2 3 4 5 6 7
physical 18: cores 0 1 2 3 4 5 6 7
physical 19: cores 0 1 2 3 4 5 6 7
physical 20: cores 0 1 2 3 4 5 6 7
physical 21: cores 0 1 2 3 4 5 6 7
physical 22: cores 0 1 2 3 4 5 6 7
physical 23: cores 0 1 2 3 4 5 6 7
physical 24: cores 0 1 2 3 4 5 6 7
physical 25: cores 0 1 2 3 4 5 6 7
physical 26: cores 0 1 2 3 4 5 6 7
physical 27: cores 0 1 2 3 4 5 6 7
physical 28: cores 0 1 2 3 4 5 6 7
physical 29: cores 0 1 2 3 4 5 6 7
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## SGI

SPECompG\_peak2012 = Not Run

SGI UV 2000 (Intel Xeon E5-4650 2.7GHz)

SPECompG\_base2012 = 54.5

OMP2012 license:14

Test sponsor: SGI

Tested by: SGI

Test date: Oct-2012

Hardware Availability: Jun-2012

Software Availability: Aug-2012

### Platform Notes (Continued)

```

physical 30: cores 0 1 2 3 4 5 6 7
physical 31: cores 0 1 2 3 4 5 6 7
physical 32: cores 0 1 2 3 4 5 6 7
physical 33: cores 0 1 2 3 4 5 6 7
physical 34: cores 0 1 2 3 4 5 6 7
physical 35: cores 0 1 2 3 4 5 6 7
physical 36: cores 0 1 2 3 4 5 6 7
physical 37: cores 0 1 2 3 4 5 6 7
physical 38: cores 0 1 2 3 4 5 6 7
physical 39: cores 0 1 2 3 4 5 6 7
physical 40: cores 0 1 2 3 4 5 6 7
physical 41: cores 0 1 2 3 4 5 6 7
physical 42: cores 0 1 2 3 4 5 6 7
physical 43: cores 0 1 2 3 4 5 6 7
physical 44: cores 0 1 2 3 4 5 6 7
physical 45: cores 0 1 2 3 4 5 6 7
physical 46: cores 0 1 2 3 4 5 6 7
physical 47: cores 0 1 2 3 4 5 6 7
physical 48: cores 0 1 2 3 4 5 6 7
physical 49: cores 0 1 2 3 4 5 6 7
physical 50: cores 0 1 2 3 4 5 6 7
physical 51: cores 0 1 2 3 4 5 6 7
physical 52: cores 0 1 2 3 4 5 6 7
physical 53: cores 0 1 2 3 4 5 6 7
physical 54: cores 0 1 2 3 4 5 6 7
physical 55: cores 0 1 2 3 4 5 6 7
physical 56: cores 0 1 2 3 4 5 6 7
physical 57: cores 0 1 2 3 4 5 6 7
physical 58: cores 0 1 2 3 4 5 6 7
physical 59: cores 0 1 2 3 4 5 6 7
physical 60: cores 0 1 2 3 4 5 6 7
physical 61: cores 0 1 2 3 4 5 6 7
physical 62: cores 0 1 2 3 4 5 6 7
physical 63: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      4102393252 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 11 (x86\_64)

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

```

sgi-accelerate-release: SGI Accelerate 1.4, Build 706r14.sles11sp2-1204092008

sgi-foundation-release: SGI Foundation Software 2.6, Build 706r14.sles11sp2-1204092008

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## SGI

SPECompG\_peak2012 = Not Run

SGI UV 2000 (Intel Xeon E5-4650 2.7GHz)

SPECompG\_base2012 = 54.5

OMP2012 license:14

Test date: Oct-2012

Test sponsor: SGI

Hardware Availability: Jun-2012

Tested by: SGI

Software Availability: Aug-2012

### Platform Notes (Continued)

```

sgi-mpi-release: SGI MPI 1.4, Build 706r14.sles11sp2-1204092008
sgi-release: SGI Performance Suite 1.4, Build 706r14.sles11sp2-1204092008
sgi-upc-release: SGI UPC 1.4, Build 706r14.sles11sp2-1204092008
sgi-xvm-release: SGI XVM 6.6, Build 706r14.sles11sp2-1204092008

```

```

uname -a:
Linux cy022-sys 3.0.38-0.5-default #1 SMP Fri Aug 3 09:02:17 UTC 2012
(358029e) x86_64 x86_64 x86_64 GNU/Linux

```

```
run-level 3 Oct 22 05:28 last=S
```

```

SPEC is set to: /store/hfeng/omp2012/1.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/lxvm/cy022-store xfs   9.9T  1.6T  8.3T  17% /store

```

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

### Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

### Base Portability Flags

```

350.md: -free
367.imagick: -std=c99

```

### Base Optimization Flags

C benchmarks:  
-O3 -xAVX -ipo1 -openmp -ansi-alias -mcmmodel=medium -shared-intel

C++ benchmarks:  
-O3 -xAVX -ipo1 -openmp -ansi-alias -mcmmodel=medium -shared-intel

Fortran benchmarks:  
-O3 -xAVX -ipo1 -openmp -mcmmodel=medium -shared-intel



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

## SGI

SPECompG\_peak2012 = Not Run

SGI UV 2000 (Intel Xeon E5-4650 2.7GHz)

SPECompG\_base2012 = 54.5

**OMP2012 license:**14

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Oct-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Aug-2012

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/SGI-OMP2012-ic13.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/SGI-OMP2012-ic13.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC OMP2012 v1.0.  
Report generated on Tue Jul 22 13:36:13 2014 by SPEC OMP2012 PS/PDF formatter v541.  
Originally published on 12 November 2012.