



# SPEC® OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XE6

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 3.38

OMP2012 license:3440A


**Test sponsor:** Indiana University

**Tested by:** Indiana University

**Test date:** Aug-2014

**Hardware Availability:** Apr-2013

**Software Availability:** Jul-2014

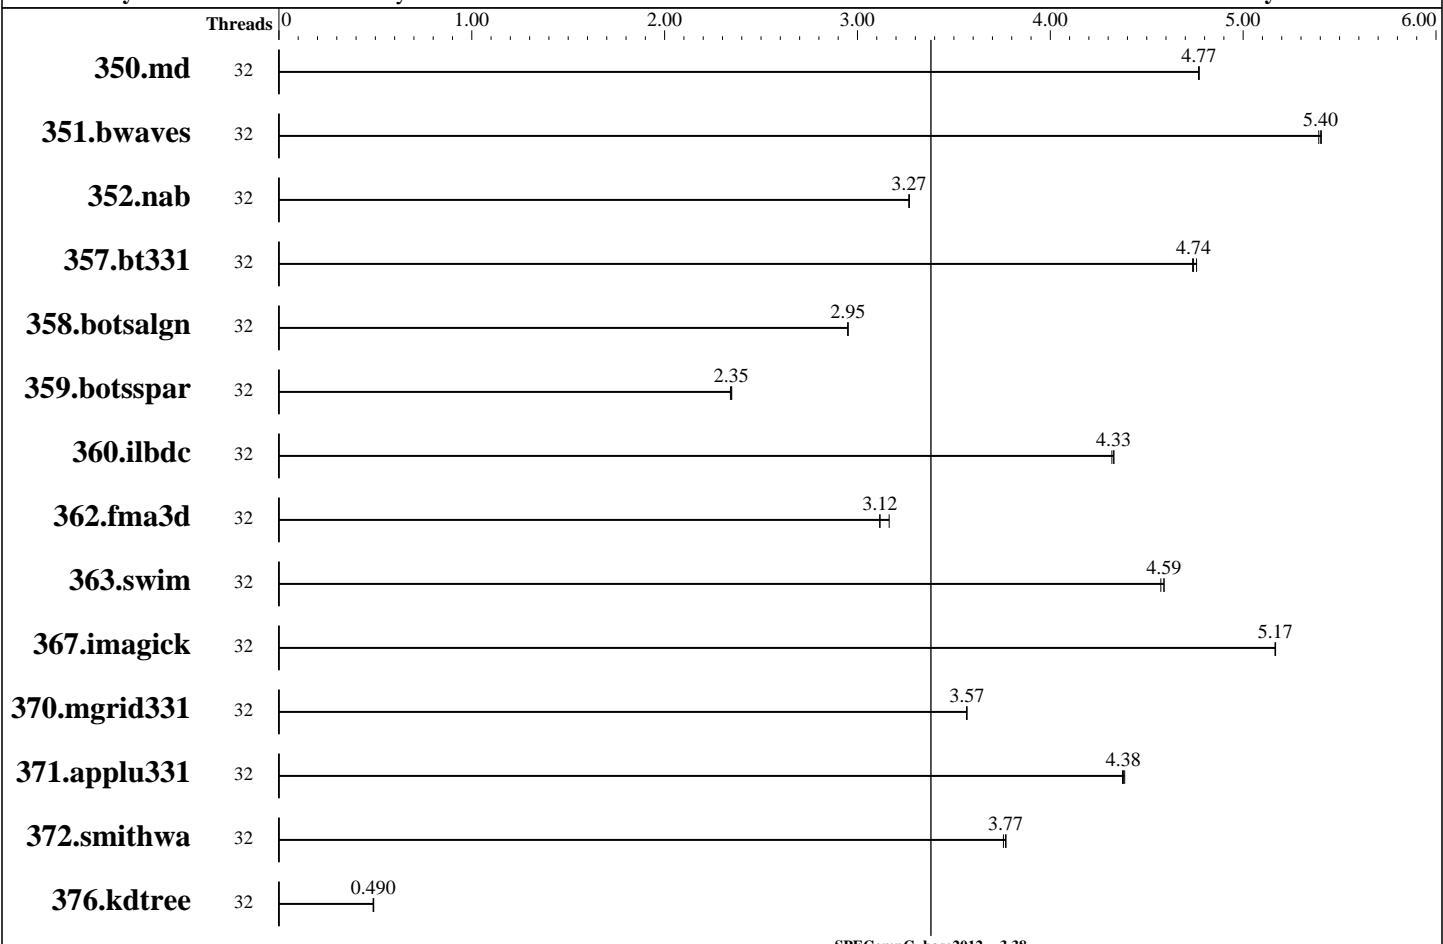

## Hardware

CPU Name: AMD Opteron 6380  
CPU Characteristics: AMD Turbo CORE Technology up to 3.4GHz, Turbo CORE off  
CPU MHz: 2500  
CPU MHz Maximum: 3400  
FPU: Integrated  
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
CPU(s) orderable: 1-2 chips  
Primary Cache: 512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core  
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: None  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Cray Linux Environment 4.2  
Compiler: Kernel 2.6.32.59-0.7.1\_1.0402.7496-cray\_gem\_c  
C/C++/Fortran: Version 8.3.1 of Cray Compiler Environment  
Auto Parallel: No  
File System: NFSv3 (IBM N5500 NAS) over Gb ethernet  
System State: Multi-user, run level 3  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other Software: None

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XE6

**SPECompG\_peak2012 = Not Run**

**SPECompG\_base2012 = 3.38**

OMP2012 license:3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2014

Hardware Availability: Apr-2013

Software Availability: Jul-2014

Base Threads Run: 32

Minimum Peak Threads: --

Maximum Peak Threads: --

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	32	<b>971</b>	<b>4.77</b>	971	4.77	970	4.77									
351.bwaves	32	838	5.41	840	5.39	<b>839</b>	<b>5.40</b>									
352.nab	32	1190	3.27	1190	3.27	<b>1190</b>	<b>3.27</b>									
357.bt331	32	<b>999</b>	<b>4.74</b>	996	4.76	1000	4.74									
358.botsalgn	32	1474	2.95	<b>1474</b>	<b>2.95</b>	1474	2.95									
359.botsspar	32	2242	2.34	<b>2238</b>	<b>2.35</b>	2236	2.35									
360.ilbdc	32	824	4.32	822	4.33	<b>822</b>	<b>4.33</b>									
362.fma3d	32	1220	3.12	<b>1219</b>	<b>3.12</b>	1201	3.16									
363.swim	32	991	4.57	987	4.59	<b>987</b>	<b>4.59</b>									
367.imagick	32	1360	5.17	<b>1361</b>	<b>5.17</b>	1361	5.17									
370.mgrid331	32	1239	3.57	<b>1239</b>	<b>3.57</b>	1239	3.57									
371.applu331	32	1382	4.39	<b>1384</b>	<b>4.38</b>	1385	4.37									
372.smithwa	32	1422	3.77	<b>1422</b>	<b>3.77</b>	1427	3.76									
376.kdtree	32	<b>9189</b>	<b>0.490</b>	9155	0.492	9206	0.489									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

```
Sysinfo program /N/soft/mason/omp2012-1.0/omp2012_br2/Docs/sysinfo
$Rev: 395 $ $Date::: 2012-07-25 #\$ 8f8c0fe9e19c658963a1e67685e50647
running on nid01041 Fri Aug 15 13:22:12 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD Opteron(tm) Processor 6380
  2 "physical id"s (chips)
    32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 2048 KB
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XE6

**SPECompG\_peak2012 = Not Run**

**SPECompG\_base2012 = 3.38**

OMP2012 license:3440A

Test sponsor: Indiana University

Tested by: Indiana University

**Test date:** Aug-2014

**Hardware Availability:** Apr-2013

**Software Availability:** Jul-2014

## Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:       66178208 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
      SUSE Linux Enterprise Server 11 (x86_64)
      VERSION = 11
      PATCHLEVEL = 1
mazama-release:
      Mazama Wed Aug 28 02:06:30 CDT 2013 on hssbld0 by bwdev
      lsb-cray-mazama-7.1.0
```

```
uname -a:
Linux nid01041 2.6.32.59-0.7.1_1.0402.7496-cray_gem_c #1 SMP Wed Feb 26
05:58:57 UTC 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
SPEC is set to: /N/soft/mason/omp2012-1.0/omp2012_br2
Filesystem      Type  Size  Used Avail Use% Mounted on
/N/soft          dvs   1.9T  1.6T  265G  86%  /N/soft
```

Cannot run dmidecode; consider saying 'chmod +s /usr/sbin/dmidecode'

(End of data from sysinfo program)

## General Notes

Software Environment:

OMP\_NESTED=FALSE

Enables (TRUE) or disables (FALSE) nested parallelism.

OMP\_DYNAMIC=FALSE

Enables (true) or disables (false) the dynamic adjustment of the number of threads.

OMP\_NUM\_THREADS=32

Sets the maximum number of threads to use for OpenMP parallel regions if no other value is specified in the program itself.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Cray

(Test Sponsor: Indiana University)

Cray XE6

SPECompG\_peak2012 = Not Run

SPECompG\_base2012 = 3.38

OMP2012 license:3440A

Test sponsor: Indiana University

Tested by: Indiana University

Test date: Aug-2014

Hardware Availability: Apr-2013

Software Availability: Jul-2014

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ftn

## Base Portability Flags

350.md: -f free

## Base Optimization Flags

C benchmarks:

-O3 -h pragma=omp -hpic -dynamic

C++ benchmarks:

-O3 -h pragma=omp -hpic -dynamic

Fortran benchmarks:

-O3 -h omp -hpic -dynamic

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/iu-crash-8.3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/iu-crash-8.3.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC OMP2012 v1.0.

Report generated on Fri Sep 19 15:28:45 2014 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 19 September 2014.