



SPEC® OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECompG_peak2012 = 22.6

OMP2012 license:27


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Feb-2017

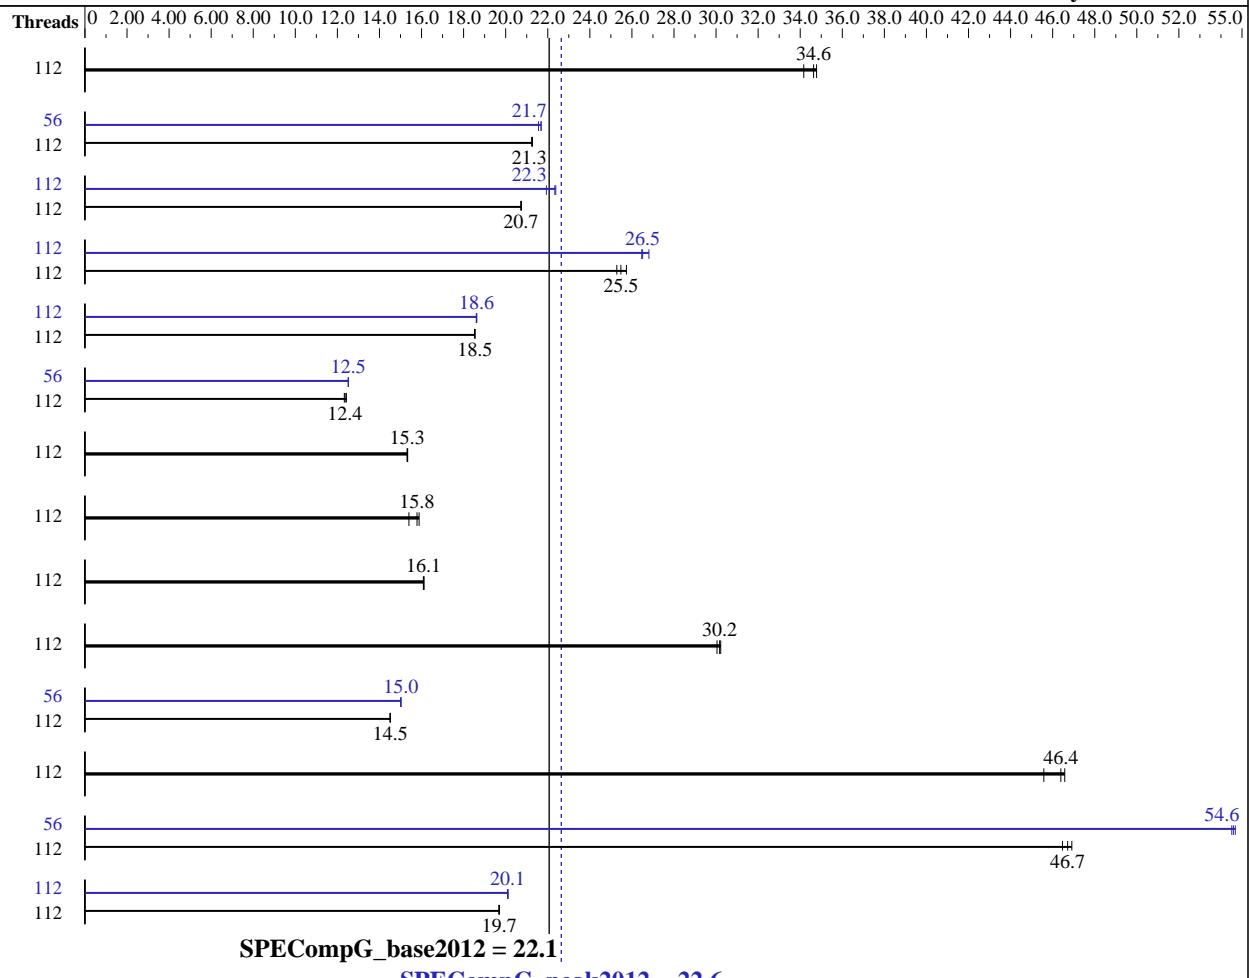

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8180	Operating System:	SUSE Linux Enterprise Server 12 SP2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz		linux-jm4z 4.4.21-69-default
CPU MHz:	2500	Compiler:	C/C++/Fortran: Version 17.0.4.196 of Intel
CPU MHz Maximum:	3800		Composer XE
FPU:	Integrated		for Linux Build 20170411
CPU(s) enabled:	56 cores, 2 chips, 28 cores/chip, 2 threads/core	Auto Parallel:	No
CPU(s) orderable:	1, 2 Chips	File System:	ext4
Primary Cache:	32 KB I + 32 KB D on chip per core	System State:	run level 3
Secondary Cache:	1 MB I+D on chip per core	Base Pointers:	64-bit
L3 Cache:	38.5 MB I+D on chip per chip	Peak Pointers:	64-bit
Other Cache:	None	Other Software:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)		
Disk Subsystem:	1 X 1.2 TB SAS, 10000 RPM		
Other Hardware:	None		
Base Threads Run:	112		
Minimum Peak Threads:	56		

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

SPECompG_peak2012 = 22.6

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECompG_base2012 = 22.1

OMP2012 license:27

Test date: Jun-2017

Test sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Feb-2017

Maximum Peak Threads: 112

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	112	136	34.2	<u>134</u>	34.6	133	34.8	112	136	34.2	<u>134</u>	34.6	133	34.8
351.bwaves	112	213	21.2	213	21.3	<u>213</u>	21.3	56	210	21.6	209	21.7	<u>209</u>	21.7
352.nab	112	188	20.7	<u>188</u>	20.7	187	20.8	112	<u>174</u>	22.3	177	21.9	174	22.4
357.bt331	112	187	25.3	184	25.7	<u>186</u>	25.5	112	<u>179</u>	26.5	177	26.8	179	26.5
358.botsalgn	112	235	18.5	<u>235</u>	18.5	235	18.5	112	234	18.6	234	18.6	<u>234</u>	18.6
359.botsspar	112	426	12.3	422	12.4	<u>424</u>	12.4	56	419	12.5	<u>419</u>	12.5	419	12.5
360.ilbdc	112	232	15.3	232	15.3	<u>232</u>	15.3	112	232	15.3	232	15.3	<u>232</u>	15.3
362.fma3d	112	247	15.4	<u>241</u>	15.8	239	15.9	112	247	15.4	<u>241</u>	15.8	239	15.9
363.swim	112	281	16.1	<u>281</u>	16.1	282	16.1	112	281	16.1	<u>281</u>	16.1	282	16.1
367.imagick	112	<u>233</u>	30.2	233	30.2	234	30.0	112	<u>233</u>	30.2	233	30.2	234	30.0
370.mgrid331	112	304	14.5	305	14.5	<u>305</u>	14.5	56	294	15.0	<u>294</u>	15.0	295	15.0
371.applu331	112	130	46.6	<u>131</u>	46.4	133	45.6	112	130	46.6	<u>131</u>	46.4	133	45.6
372.smithwa	112	<u>115</u>	46.7	115	46.5	114	46.9	56	98.0	54.7	<u>98.2</u>	54.6	98.3	54.5
376.kdtree	112	228	19.7	229	19.7	<u>228</u>	19.7	112	224	20.1	<u>224</u>	20.1	224	20.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /speccomp2012/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 #$ 8f8c0fe9e19c658963a1e67685e50647
running on linux-jm4z Tue Jun 20 00:07:03 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
  2 "physical id"s (chips)
    112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings   : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
cache size : 39424 KB
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECompG_peak2012 = 22.6

SPECompG_base2012 = 22.1

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Feb-2017

Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:      394122080 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-jm4z 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 17 16:37

SPEC is set to: /speccomp2012
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   828G   57G  772G   7%  /


Additional information from dmidecode:
BIOS INSYDE Corp. 0.10 03/09/2017
Memory:
 24x Samsung M393A2K43BB1-CTD 16 GB 2666 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
=====
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
BIOS settings notes:
Power Policy set to Performance
Set Patrol Scrub to Disable
General OMP Library Settings
ENV_KMP_LIBRARY=turnaround
ENV_OMP_SCHEDULE=static
ENV_KMP_STACKSIZE=256M
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECompG_peak2012 = 22.6

SPECompG_base2012 = 22.1

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Feb-2017

General Notes (Continued)

```
ENV_OMP_DYNAMIC=FALSE
ENV_OMP_NESTED=FALSE
ENV_KMP_AFFINITY=compact,0
=====
Per benchmark peak OMP Library Settings
=====
351.bwaves:peak:
    ENV_KMP_AFFINITY=compact,1
    ENV_OMP_SCHEDULE=static,1
=====
357.bt331:peak
    ENV_OMP_SCHEDULE=static,1
=====
359.botsspar:peak:
    ENV_KMP_AFFINITY=compact,1
    ENV_OMP_SCHEDULE=guided
=====
370.mgrid331:peak
    ENV_KMP_AFFINITY=compact,1
=====
372.smithwa:peak:
    ENV_KMP_AFFINITY=compact,1
    ENV_OMP_SCHEDULE=static,1
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

```
350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99
```



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECompG_peak2012 = 22.6

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Feb-2017

Base Optimization Flags

C benchmarks:

-O2 -openmp -ipo -xCORE-AVX2 -ansi-alias

C++ benchmarks:

-O2 -openmp -ipo -xCORE-AVX2 -ansi-alias

Fortran benchmarks:

-O2 -openmp -ipo -xCORE-AVX2 -align array64byte

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

350.md: -FR

357.bt331: -mcmodel=medium

363.swim: -mcmodel=medium

367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -opt-calloc -fp-model fast=2
-no-prec-div -no-prec-sqrt -ansi-alias

358.botsalgn: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias

359.botsspar: Same as 358.botsalgn

367.imagick: basepeak = yes

372.smithwa: -O2 -openmp -ipo -xCORE-AVX2 -fno-alias
-opt-streaming-stores always -opt-malloc-options=1
-ansi-alias

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2017 Standard Performance Evaluation Corporation

Huawei

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECompG_peak2012 = 22.6

SPECompG_base2012 = 22.1

OMP2012 license:27

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Feb-2017

Peak Optimization Flags (Continued)

C++ benchmarks:

```
-O3 -openmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias
```

Fortran benchmarks:

```
350.md: basepeak = yes
```

```
351.bwaves: -O3 -openmp -ipo -xCORE-AVX2 -fno-alias -fp-model fast=2  
-no-prec-div -no-prec-sqrt -align array64byte
```

```
357.bt331: Same as 351.bwaves
```

```
360.ilbdc: basepeak = yes
```

```
362.fma3d: basepeak = yes
```

```
363.swim: basepeak = yes
```

```
370.mgrid331: -O2 -openmp -ipo -xCORE-AVX2 -fno-alias  
-opt-malloc-options=3 -align array64byte
```

```
371.applu331: basepeak = yes
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20161208.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20161208.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.

Report generated on Tue Jul 11 12:25:40 2017 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 11 July 2017.