



SPEC® OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG_base2012 = 6.21

OMP2012 license:056A


Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

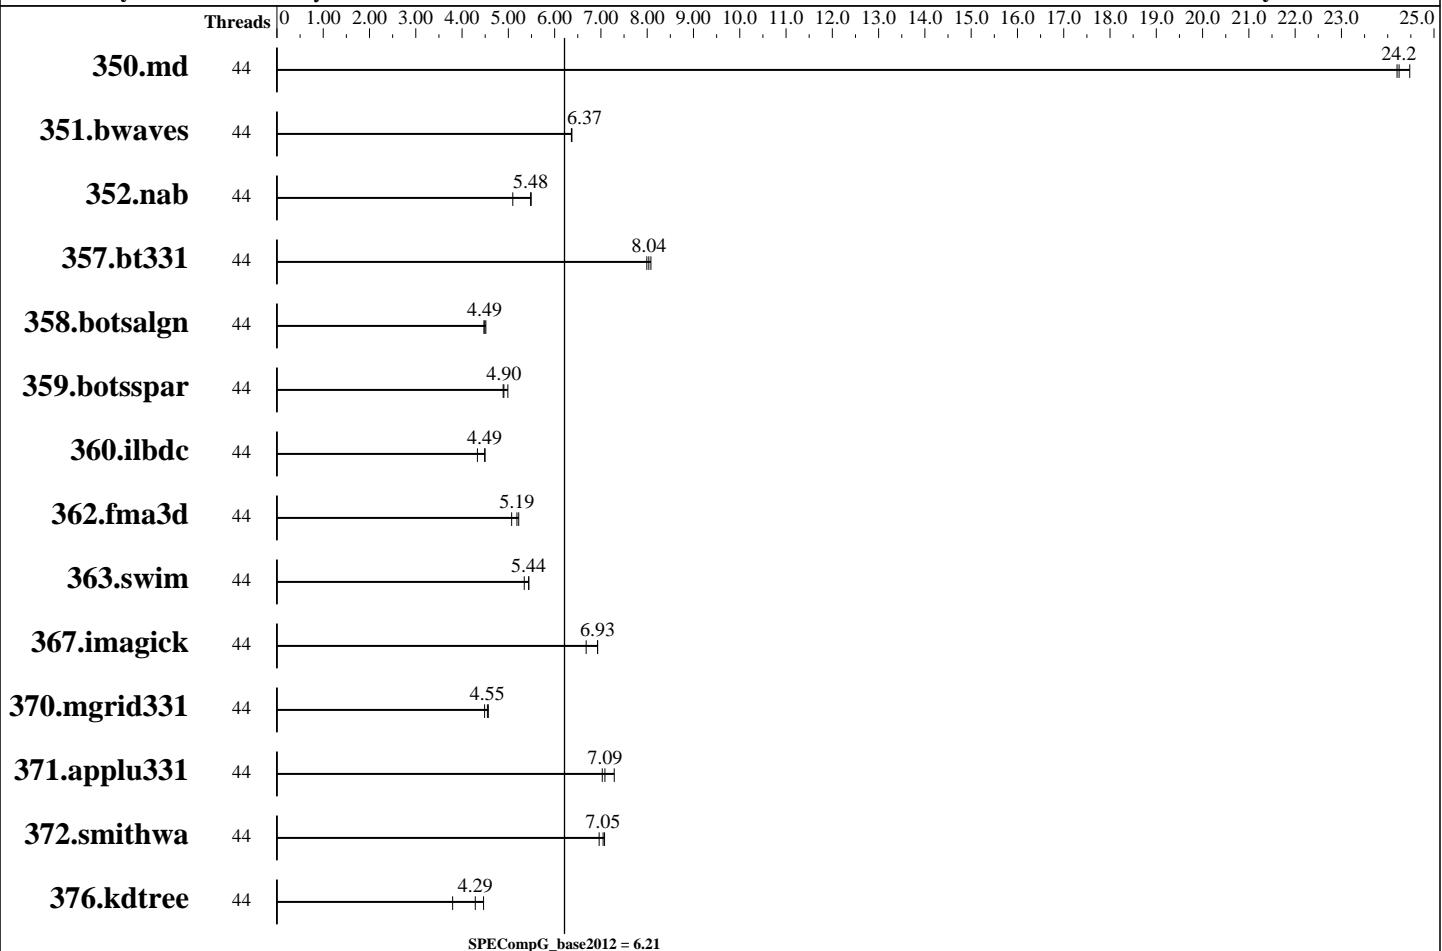

Hardware

CPU Name: Dual Intel Xeon E5-2680 v3 (44 of 48 ht cores allocated to KVM)
CPU Characteristics: Intel Turbo Boost Technology off, Hyper-Threading on
CPU MHz: 2500
CPU MHz Maximum: 3300
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 1-2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 118 GB (118/128 GB Allocated to KVM)
400GB (SATA Mix Use MLC 6Gbps 2.5in Hot-plug Drive,13G (400-AEIX) dual SSDs, RAID-1)

Software

Operating System: CentOS Linux release 7.5.1804 (Core) 3.10.0-862.3.3.el7.x86_64
Compiler: C/C++/Fortran: Version 18.4 of PGI Community Edition
Auto Parallel: No
File System: CephFS
System State: Run level 5 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: KVM Version 2.10.0-21

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG_base2012 = 6.21

OMP2012 license:056A

Test date: Sep-2018

Hardware Availability: Jun-2018

Software Availability: Jun-2018

Other Hardware: None

Base Threads Run: 44

Minimum Peak Threads: --

Maximum Peak Threads: --

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	44	189	24.5	<u>191</u>	24.2	191	24.2									
351.bwaves	44	711	6.37	712	6.36	711	6.37									
352.nab	44	763	5.10	710	5.48	708	5.49									
357.bt331	44	587	8.08	590	8.04	593	7.99									
358.botsalgn	44	973	4.47	969	4.49	964	4.51									
359.botsspar	44	1052	4.99	1071	4.90	1074	4.89									
360.ilbdc	44	822	4.33	792	4.50	793	4.49									
362.fma3d	44	749	5.07	733	5.19	727	5.22									
363.swim	44	848	5.34	833	5.44	833	5.44									
367.imagick	44	1052	6.68	1015	6.93	1014	6.93									
370.mgrid331	44	985	4.49	972	4.55	968	4.57									
371.applu331	44	855	7.09	832	7.29	862	7.03									
372.smithwa	44	770	6.96	757	7.08	761	7.05									
376.kdtree	44	1050	4.29	1008	4.46	1185	3.80									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /home/tmh97/SPEC_OMP2012v1.1/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on js-156-29.jetstream-cloud.org Fri Sep 14 16:57:18 2018
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
        44 "physical id"s (chips)
        44 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 1
        siblings : 1
        physical 0: cores 0
        physical 1: cores 0
        physical 2: cores 0
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG_base2012 = 6.21

OMP2012 license:056A

Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

Platform Notes (Continued)

```
physical 3: cores 0
physical 4: cores 0
physical 5: cores 0
physical 6: cores 0
physical 7: cores 0
physical 8: cores 0
physical 9: cores 0
physical 10: cores 0
physical 11: cores 0
physical 12: cores 0
physical 13: cores 0
physical 14: cores 0
physical 15: cores 0
physical 16: cores 0
physical 17: cores 0
physical 18: cores 0
physical 19: cores 0
physical 20: cores 0
physical 21: cores 0
physical 22: cores 0
physical 23: cores 0
physical 24: cores 0
physical 25: cores 0
physical 26: cores 0
physical 27: cores 0
physical 28: cores 0
physical 29: cores 0
physical 30: cores 0
physical 31: cores 0
physical 32: cores 0
physical 33: cores 0
physical 34: cores 0
physical 35: cores 0
physical 36: cores 0
physical 37: cores 0
physical 38: cores 0
physical 39: cores 0
physical 40: cores 0
physical 41: cores 0
physical 42: cores 0
physical 43: cores 0
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal:      123602104 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
CentOS Linux release 7.5.1804 (Core)
```

```
From /etc/*release* /etc/*version*
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG_base2012 = 6.21

OMP2012 license:056A

Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

Platform Notes (Continued)

```
centos-release: CentOS Linux release 7.5.1804 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.5 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.5.1804 (Core)
system-release: CentOS Linux release 7.5.1804 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
Linux js-156-29.jetstream-cloud.org 3.10.0-862.3.3.el7.x86_64 #1 SMP Fri Jun
15 04:15:27 UTC 2018 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Sep 14 16:48
```

```
SPEC is set to: /home/tmh97/SPEC_OMP2012v1.1
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal       xfs   60G   40G   21G  66% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

General Notes

Jetstream VM Configuration:

1 VM instance running OMP2012 on single node with 44 VCPUS and 118 GB memory
44 of the 48 available VCPUS are allocated to KVM

Environment Variables:

```
OMP_STACKSIZE=1G
ulimit -s unlimited
KMP_AFFINITY=compact
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)



SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG_base2012 = 6.21

OMP2012 license:056A

Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

Base Compiler Invocation

C benchmarks:

`pgcc`

C++ benchmarks:

`pgc++`

Fortran benchmarks:

`pgf90`

Base Portability Flags

350.md: `-Mfree`

357.bt331: `-mcmodel=medium`

363.swim: `-mcmodel=medium`

Base Optimization Flags

C benchmarks:

`-fast -Mfprelaxed -mp -Mipa=fast -Mipa=inline`

C++ benchmarks:

`-fast -Mfprelaxed -mp -Mipa=fast -Mipa=inline`

Fortran benchmarks:

`-fast -Mfprelaxed -mp -Mipa=fast -Mipa=inline`

The flags file that was used to format this result can be browsed at

http://www.spec.org/omp2012/flags/pgi17_linux_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/omp2012/flags/pgi17_linux_flags.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.

Report generated on Wed Dec 19 12:52:16 2018 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 19 December 2018.