



SPEC® OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license: 13


Test sponsor: Intel

Tested by: Intel

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Jan-2019

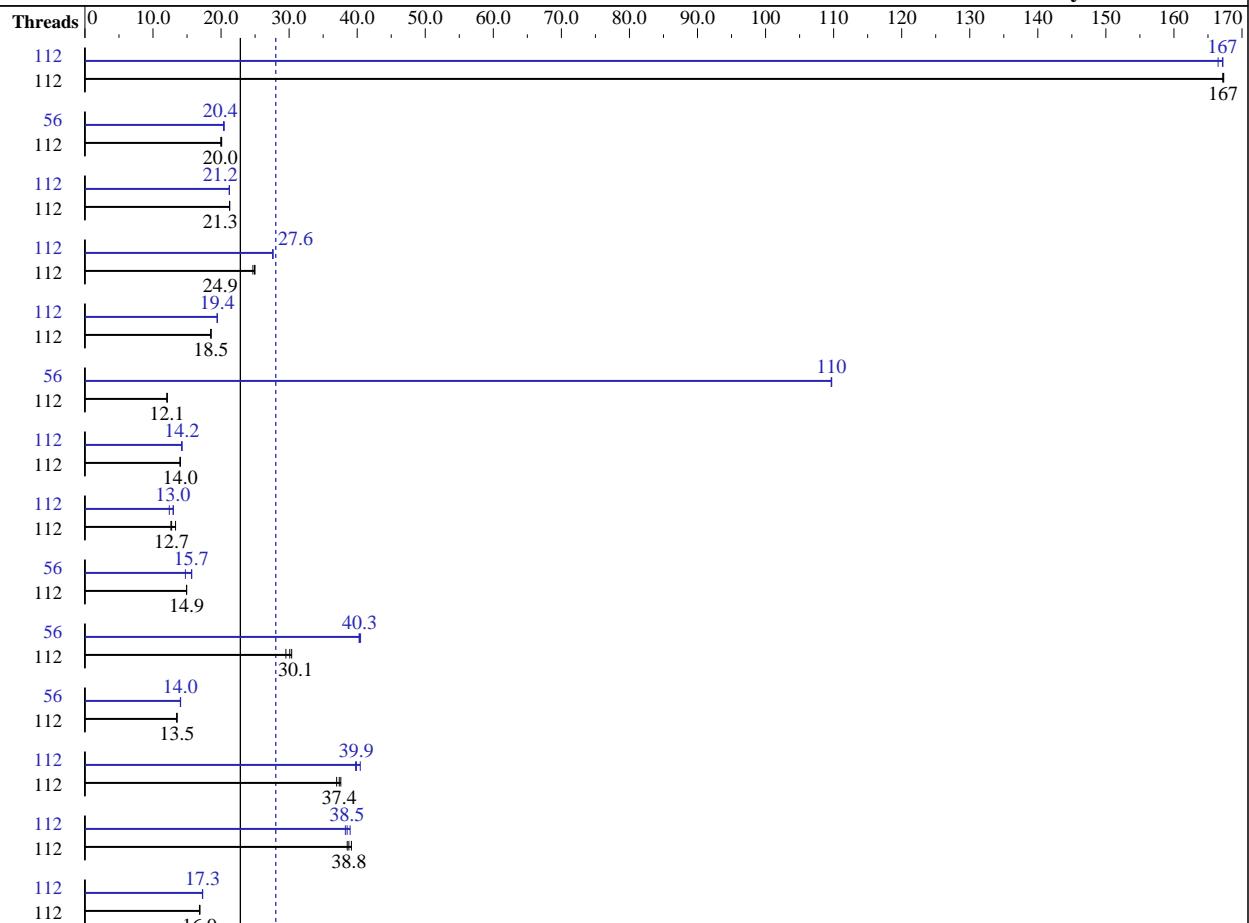

SPECompG_base2012 = 22.8

SPECompG_peak2012 = 28.0

Hardware

CPU Name: Intel Xeon Platinum 8280L
CPU Characteristics: Turbo ON, SMT ON
CPU MHz: 2700
CPU MHz Maximum: 4000
FPU: Integrated
CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 Chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (12 x 16 GB 2Rx8 DDR4-2933Y-R)
Disk Subsystem: Panasas ActiveStor 14 (124TB connected via 10GB Ethernet)
Other Hardware: None
Base Threads Run: 112

Software

Operating System: Oracle Linux Server release 7.6
Compiler: C/C++/Fortran: Version 19.0.2.187 of Intel Composer XE for Linux
Auto Parallel: No
File System: PanFS
System State: Run Level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license:13

Test date: Mar-2019

Test sponsor: Intel

Hardware Availability: Apr-2019

Tested by: Intel

Software Availability: Jan-2019

Minimum Peak Threads: 56
Maximum Peak Threads: 112

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	112	<u>27.7</u>	<u>167</u>	27.7	167	27.7	167	112	<u>27.7</u>	<u>167</u>	27.8	166	27.7	167
351.bwaves	112	226	20.0	225	20.1	227	20.0	56	221	20.5	222	20.4	222	20.4
352.nab	112	183	21.3	183	21.3	<u>183</u>	<u>21.3</u>	112	183	21.2	<u>183</u>	<u>21.2</u>	184	21.2
357.bt331	112	192	24.7	190	25.0	<u>190</u>	<u>24.9</u>	112	<u>172</u>	<u>27.6</u>	172	27.6	172	27.6
358.botsalgn	112	235	18.5	<u>235</u>	<u>18.5</u>	235	18.5	112	224	19.4	224	19.4	224	19.4
359.botsspar	112	435	12.1	435	12.1	434	12.1	56	47.9	110	47.8	110	47.9	110
360.ilbdc	112	255	14.0	<u>254</u>	<u>14.0</u>	254	14.0	112	250	14.3	<u>250</u>	<u>14.2</u>	250	14.2
362.fma3d	112	298	12.7	285	13.3	301	12.6	112	307	12.4	293	13.0	292	13.0
363.swim	112	303	14.9	303	14.9	304	14.9	56	307	14.8	289	15.7	289	15.7
367.imagick	112	238	29.5	231	30.4	<u>234</u>	<u>30.1</u>	56	<u>174</u>	<u>40.3</u>	174	40.5	175	40.3
370.mgrid331	112	327	13.5	327	13.5	327	13.5	56	314	14.1	315	14.0	315	14.0
371.applu331	112	161	37.6	164	37.0	<u>162</u>	<u>37.4</u>	112	152	39.8	150	40.5	152	39.9
372.smithwa	112	137	39.2	139	38.5	<u>138</u>	<u>38.8</u>	112	<u>139</u>	<u>38.5</u>	138	39.0	140	38.3
376.kdtree	112	267	16.8	267	16.9	266	16.9	112	260	17.3	261	17.3	260	17.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Sysinfo program /global/panfs02/innl/aknyaze1/OMP2012/1.1/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on elc02 Tue Mar 26 20:16:21 2019

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280L CPU @ 2.70GHz
  2 "physical id"s (chips)
    112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
cache size : 39424 KB
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license:13

Test date: Mar-2019

Test sponsor: Intel

Hardware Availability: Apr-2019

Tested by: Intel

Software Availability: Jan-2019

Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:       196689540 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
oracle-release: Oracle Linux Server release 7.6
os-release:
    NAME="Oracle Linux Server"
    VERSION="7.6"
    ID="ol"
    VARIANT="Server"
    VARIANT_ID="server"
    VERSION_ID="7.6"
    PRETTY_NAME="Oracle Linux Server 7.6"
    ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Oracle Linux Server release 7.6
system-release-cpe: cpe:/o:oracle:linux:7:6:server
```

```
uname -a:
Linux elc02 3.10.0-957.5.1.el7.crt1.x86_64 #1 SMP Fri Feb 1 14:04:43 MST 2019
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 25 16:12
```

```
SPEC is set to: /global/panfs02/innl/aknyaze1/OMP2012/1.1
Filesystem           Type  Size  Used Avail Use% Mounted on
panfs://36.101.212.1/innl panfs 269T  200T   70T  75% /global/panfs02/innl
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

(End of data from sysinfo program)

General Notes

```
=====
General base OMP Library Settings
ENV_KMP_AFFINITY=compact,0,verbose
```

```
=====
General peak OMP Library Settings
ENV_KMP_AFFINITY=compact,0,verbose
```

=====

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license:13

Test date: Mar-2019

Test sponsor: Intel

Hardware Availability: Apr-2019

Tested by: Intel

Software Availability: Jan-2019

General Notes (Continued)

Per benchmark peak OMP Library Settings

=====

System settings notes:

 Intel Turbo Boost Technology (Turbo) : Enabled

=====

General OMP Library Settings

 KMP_LIBRARY=turnaround

 KMP_STACKSIZE=292M

 KMP_BLOCKTIME=infinite

 OMP_DYNAMIC=FALSE

 OMP_NESTED=FALSE

 OMP_SCHEDULE=static

Spectre and Meltdown

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

=====

351.bwaves:peak:

 ENV_KMP_AFFINITY=compact,1,verbose

=====

359.botsspar:peak:

 ENV_KMP_AFFINITY=compact,1,verbose

=====

363.swim:peak:

 ENV_KMP_AFFINITY=compact,1,verbose

=====

367.imagick:peak:

 ENV_KMP_AFFINITY=compact,1,verbose

=====

370.mgrid331:peak:

 ENV_KMP_AFFINITY=compact,1,verbose

Base Compiler Invocation

C benchmarks:

 icc

C++ benchmarks:

 icpc

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Jan-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:

-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0

C++ benchmarks:

-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0

Fortran benchmarks:

-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0
-align all

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Peak Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Jan-2019

Peak Portability Flags (Continued)

367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=0

358.botsalgn: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt

359.botsspar: Same as 358.botsalgn

367.imagick: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -ipo

372.smithwa: Same as 352.nab

C++ benchmarks:

-O3 -qopenmp -xCORE-AVX512 -fp-model fast=2 -fno-alias -no-prec-div
-no-prec-sqrt -qopt-prefetch=1

Fortran benchmarks:

350.md: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=0 -align all

351.bwaves: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=2 -align all

357.bt331: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=1 -align all

360.ilbdc: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt
-ipo -qopt-prefetch=4 -align all

362.fma3d: Same as 350.md

363.swim: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high
-fp-model fast=2 -no-prec-div -no-prec-sqrt -fno-alias
-qopt-malloc-options=3 -ipo -qopt-prefetch=0 -align all

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2019 Standard Performance Evaluation Corporation

Intel

Intel Server System R2208WFTZS (2 x Intel Xeon Platinum 8280L, DDR4-2933, Turbo ON, SMT ON)

SPECompG_peak2012 = 28.0

SPECompG_base2012 = 22.8

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Jan-2019

Peak Optimization Flags (Continued)

```
370.mgrid331: -O3 -qopenmp -xCORE-AVX2 -fp-model fast=2 -no-prec-div  
-no-prec-sqrt -fno-alias -qopt-malloc-options=3 -ipo  
-qopt-prefetch=0 -align all
```

```
371.applu331: -O3 -qopenmp -xCORE-AVX2 -fp-model fast=2 -fno-alias  
-no-prec-div -no-prec-sqrt -qopt-prefetch=0 -align all
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic19-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic19-linux64.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.

Report generated on Wed Apr 10 14:05:50 2019 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 10 April 2019.