



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

SPECmpiM\_peak2007 = Not Run

## Endeavor (Intel Xeon E5462, 2.80 GHz)

SPECmpiM\_base2007 = 20.6

MPI2007 license: 13


Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: Sep-2008

Hardware Availability: Dec-2007

Software Availability: Aug-2008

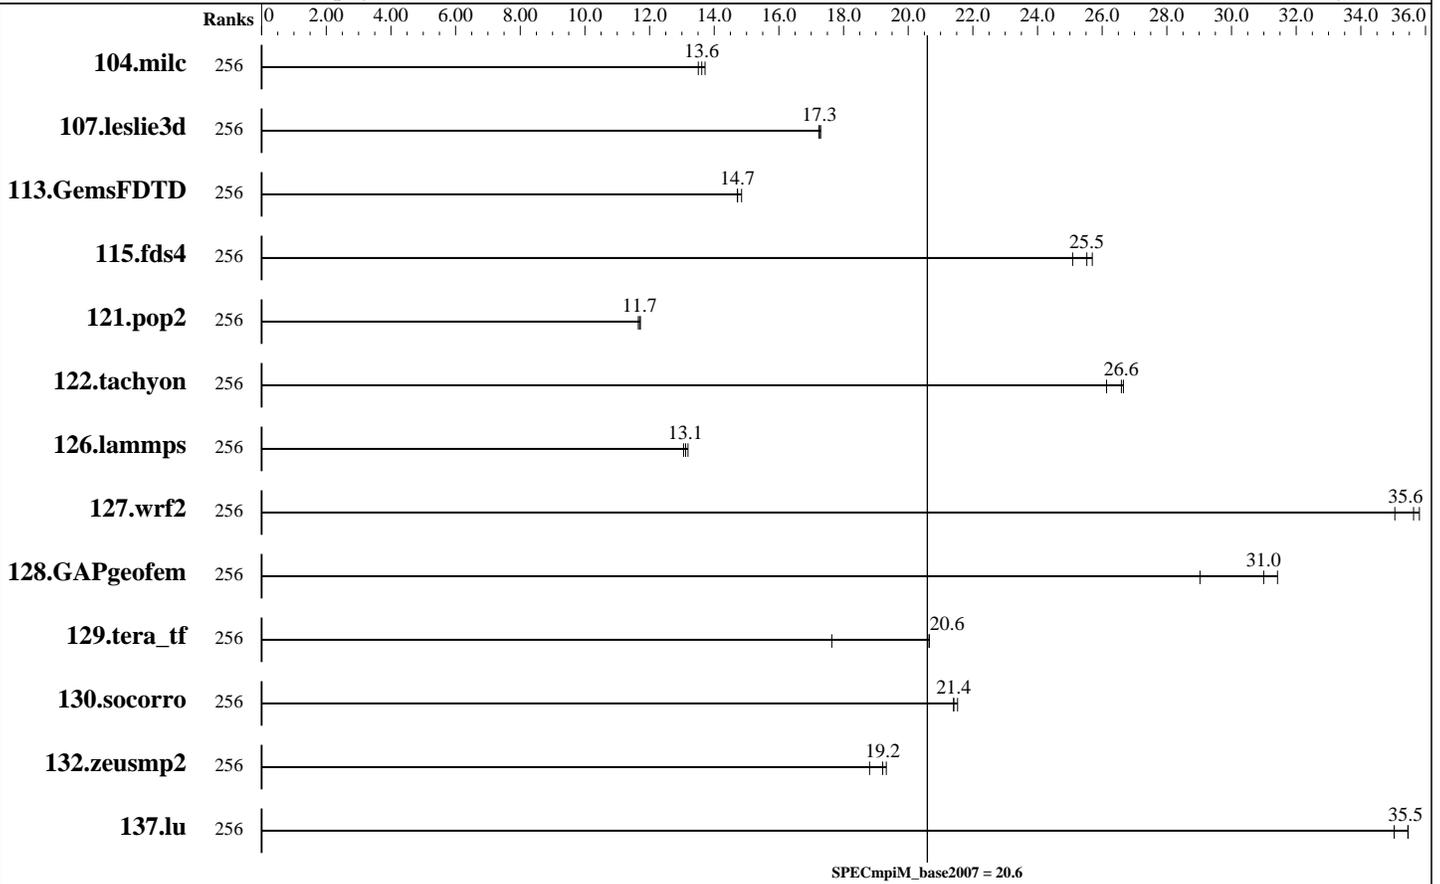

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	256	116	13.5	114	13.7	<u>115</u>	<u>13.6</u>									
107.leslie3d	256	303	17.2	<u>302</u>	<u>17.3</u>	302	17.3									
113.GemsFDTD	256	425	14.8	<u>428</u>	<u>14.7</u>	429	14.7									
115.fds4	256	<u>76.4</u>	<u>25.5</u>	75.9	25.7	77.8	25.1									
121.pop2	256	<u>353</u>	<u>11.7</u>	352	11.7	354	11.7									
122.tachyon	256	107	26.1	<u>105</u>	<u>26.6</u>	105	26.7									
126.lammps	256	223	13.1	221	13.2	<u>222</u>	<u>13.1</u>									
127.wrf2	256	218	35.8	<u>219</u>	<u>35.6</u>	222	35.1									
128.GAPgeofem	256	71.1	29.0	<u>66.6</u>	<u>31.0</u>	65.7	31.4									
129.tera_tf	256	134	20.7	157	17.6	<u>134</u>	<u>20.6</u>									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

SPECmpiM\_peak2007 = Not Run

## Endeavor (Intel Xeon E5462, 2.80 GHz)

SPECmpiM\_base2007 = 20.6

MPI2007 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Dec-2007

Tested by: Pavel Shelepugin

Software Availability: Aug-2008

### Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
130.socorro	256	178	21.4	<b><u>178</u></b>	<b><u>21.4</u></b>	177	21.5									
132.zeusmp2	256	161	19.3	<b><u>162</u></b>	<b><u>19.2</u></b>	165	18.8									
137.lu	256	105	35.0	104	35.5	<b><u>104</u></b>	<b><u>35.5</u></b>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: Endeavor Node  
 Interconnects: IB Switch  
 Gigabit Ethernet  
 File Server Node: Panasas Fileserver  
 Total Compute Nodes: 32  
 Total Chips: 64  
 Total Cores: 256  
 Total Threads: 256  
 Total Memory: 512 GB  
 Base Ranks Run: 256  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

#### Software Summary

C Compiler: Intel C++ Compiler 10.1 for Linux (10.1.018)  
 C++ Compiler: Intel C++ Compiler 10.1 for Linux (10.1.018)  
 Fortran Compiler: Intel Fortran Compiler 10.1 for Linux (10.1.018)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: Intel MPI Library 3.1 for Linux (3.1.038)  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: Intel MPI Library 3.1 for Linux Multi-Purpose Daemon (MPD)

### Node Description: Endeavor Node

#### Hardware

Number of nodes: 32  
 Uses of the node: compute  
 Vendor: Intel  
 Model: SR1560SF  
 CPU Name: Intel Xeon CPU E5462  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 8  
 Cores per chip: 4  
 Threads per core: 1  
 CPU Characteristics: 1600 MHz FSB  
 CPU MHz: 2800  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (FBDIMM 16x1-GB 667 MHz)  
 Disk Subsystem: Seagate Barracuda ES 250 GB ST3250620NS  
 Other Hardware: None  
 Adapter: Intel (ESB2) 82563EB Dual-Port Gigabit Ethernet Controller  
 Number of Adapters: 1  
 Slot Type: PCI-Express x8

#### Software

Adapter: Intel (ESB2) 82563EB Dual-Port Gigabit Ethernet Controller  
 Adapter Driver: e1000  
 Adapter Firmware: None  
 Adapter: Mellanox MHGH28-XTC  
 Adapter Driver: OFED 1.3.1  
 Adapter Firmware: 2.5.0  
 Operating System: RedHat EL 4 Update 4  
 Local File System: Linux/ext3  
 Shared File System: DirectFlow  
 System State: Multi-User  
 Other Software: PBS Pro 8.0

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

SPECmpiM\_peak2007 = Not Run

Endeavor (Intel Xeon E5462, 2.80 GHz)

SPECmpiM\_base2007 = 20.6

MPI2007 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Dec-2007

Tested by: Pavel Shelepugin

Software Availability: Aug-2008

## Node Description: Endeavor Node

Data Rate:	1Gbps Ethernet
Ports Used:	1
Interconnect Type:	Ethernet
Adapter:	Mellanox MHGH28-XTC
Number of Adapters:	1
Slot Type:	PCIe x16 Gen2
Data Rate:	InfiniBand 4x DDR
Ports Used:	1
Interconnect Type:	InfiniBand

## Node Description: Panasas Fileserver

Hardware	Software
Number of nodes:	1
Uses of the node:	fileserver
Vendor:	Panasas
Model:	ActiveStor 3050
CPU Name:	--
CPU(s) orderable:	1-2 chips
Chips enabled:	1
Cores enabled:	1
Cores per chip:	1
Threads per core:	1
CPU Characteristics:	--
CPU MHz:	0
Primary Cache:	None
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	1 MB
Disk Subsystem:	140 disks, 250GB/disk, 35TB total, 7 Shelves
Other Hardware:	None
Adapter:	--
Number of Adapters:	1
Slot Type:	--
Data Rate:	1Gbps Ethernet
Ports Used:	4
Interconnect Type:	Ethernet
Adapter:	--
Adapter Driver:	--
Adapter Firmware:	N/A
Operating System:	2.3.7.a-195733.1
Local File System:	PanFS
Shared File System:	DirectFlow
System State:	Multi-User
Other Software:	None

## Interconnect Description: IB Switch

Hardware	Software
Vendor:	Cisco
Model:	Cisco SFS 7024D
Switch Model:	Cisco SFS 7024D

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

SPECmpiM\_peak2007 = Not Run

Endeavor (Intel Xeon E5462, 2.80 GHz)

SPECmpiM\_base2007 = 20.6

MPI2007 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Dec-2007

Tested by: Pavel Shelepugin

Software Availability: Aug-2008

## Interconnect Description: IB Switch

Number of Switches:	1
Number of Ports:	288
Data Rate:	InfiniBand 4x DDR
Firmware:	4.1.1.1.11
Topology:	Single switch
Primary Use:	MPI traffic

## Interconnect Description: Gigabit Ethernet

	Hardware
Vendor:	Cisco
Model:	Cisco Catalyst 4510
Switch Model:	Cisco Catalyst 4510
Number of Switches:	1
Number of Ports:	332
Data Rate:	1Gbps Ethernet
Firmware:	--
Topology:	Star
Primary Use:	Cluster File System

### Software

## General Notes

Required alternate sources:  
 129.tera\_tf: fixbuffer  
 Optional alternate sources:  
 104.milc: calloc  
 113.GemsFDTD: maxprocandstop

## Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:  
126.lammps: mpiicpc

Fortran benchmarks:  
mpiifort

Benchmarks using both Fortran and C:  
mpiicc mpiifort



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

SPECmpiM\_peak2007 = Not Run

Endeavor (Intel Xeon E5462, 2.80 GHz)

SPECmpiM\_base2007 = 20.6

MPI2007 license: 13

Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: Sep-2008

Hardware Availability: Dec-2007

Software Availability: Aug-2008

## Base Portability Flags

```
121.pop2: -DSPEC_MPI_CASE_FLAG
126.lammps: -DMPICH_IGNORE_CXX_SEEK
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX
130.socorro: -DSPEC_EIGHT_BYTE_LONG
```

## Base Optimization Flags

C benchmarks:

```
-O3 -xT -ipo -no-prec-div
```

C++ benchmarks:

```
126.lammps: -O3 -xT -ipo -no-prec-div
```

Fortran benchmarks:

```
-O3 -xT -ipo -no-prec-div
```

Benchmarks using both Fortran and C:

```
-O3 -xT -ipo -no-prec-div
```

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.20080618.html](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.20080618.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.20080618.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.20080618.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v1.0.  
Report generated on Tue Jul 22 13:35:09 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 8 October 2008.