



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5680, 3.33 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.14

MPI2007 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Sep-2010

Hardware Availability: May-2010

Software Availability: Oct-2010

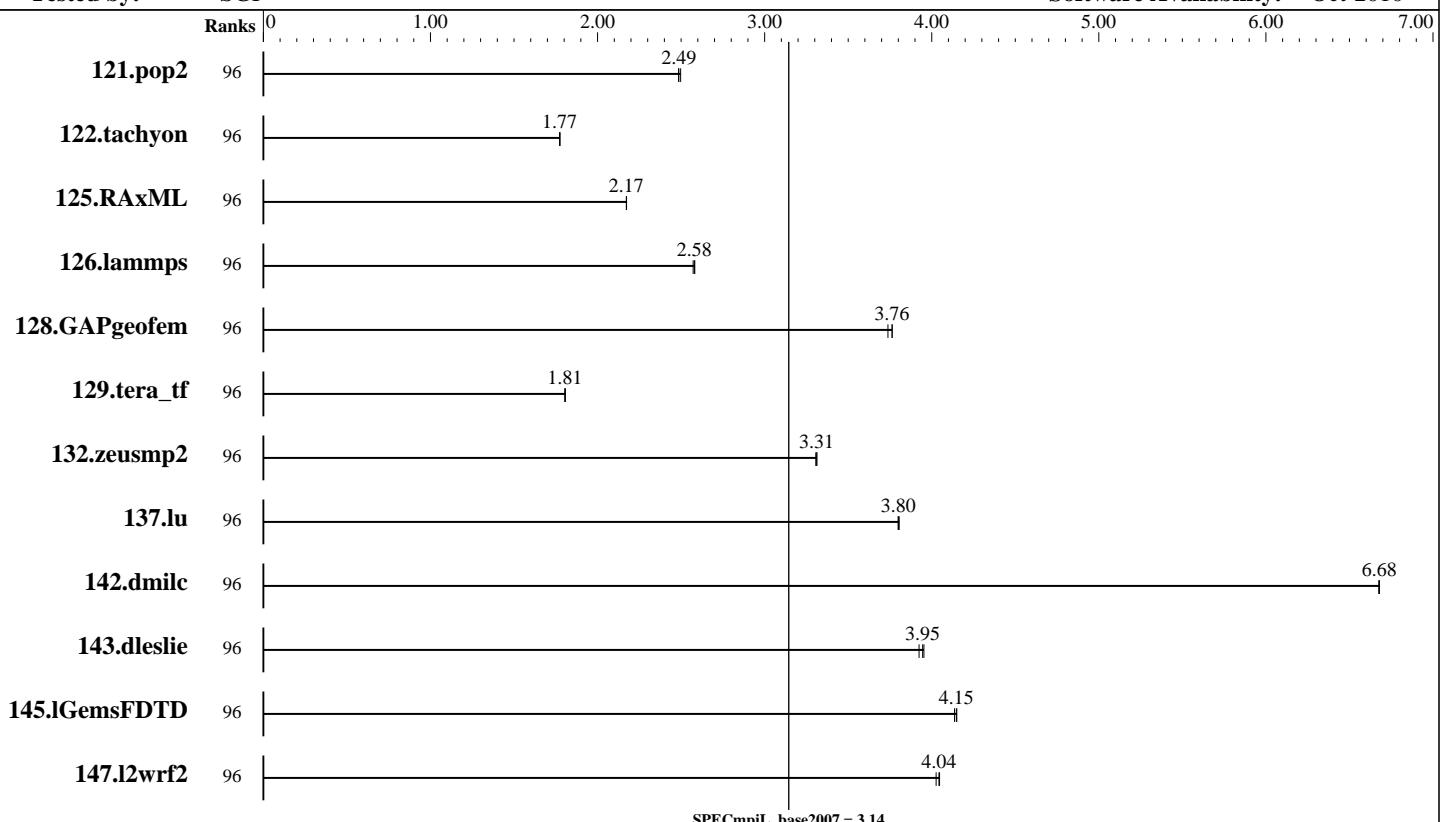

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	96	1558	2.50	<u>1565</u>	<u>2.49</u>	1566	2.48							
122.tachyon	96	1096	1.77	1097	1.77	1095	1.77							
125.RAxML	96	1343	2.17	<u>1343</u>	<u>2.17</u>	1344	2.17							
126.lammps	96	956	2.57	952	2.58	953	2.58							
128.GAPgeofem	96	1577	3.76	1587	3.74	1577	3.76							
129.tera_tf	96	608	1.81	609	1.81	609	1.80							
132.zeusmp2	96	641	3.31	640	3.31	640	3.31							
137.lu	96	1104	3.81	1106	3.80	1106	3.80							
142.dmilc	96	552	6.68	552	6.68	552	6.68							
143.dleslie	96	790	3.92	784	3.95	786	3.95							
145.lGemsFDTD	96	1066	4.14	1064	4.15	1063	4.15							
147.l2wrf2	96	2029	4.04	2027	4.05	2038	4.03							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5680, 3.33 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.14

MPI2007 license: 4

Test date: Sep-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Oct-2010

Hardware Summary

Type of System:	Homogeneous
Compute Node:	SGI Altix ICE 8400EX Compute Node
Interconnects:	InfiniBand (MPI) InfiniBand (I/O)
File Server Node:	SGI InfiniteStorage Nexas 2000 NAS
Total Compute Nodes:	8
Total Chips:	16
Total Cores:	96
Total Threads:	192
Total Memory:	192 GB
Base Ranks Run:	96
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C Compiler for Linux Version 11.1, Build 20100414
C++ Compiler:	Intel C++ Compiler for Linux Version 11.1, Build 20100414
Fortran Compiler:	Intel Fortran Compiler for Linux Version 11.1, Build 20100414
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	SGI MPT 2.02 Beta
Other MPI Info:	OFED 1.4.2
Pre-processors:	None
Other Software:	None

Node Description: SGI Altix ICE 8400EX Compute Node

Hardware

Number of nodes:	8
Uses of the node:	compute
Vendor:	SGI
Model:	SGI Altix ICE 8400EX (Intel Xeon X5680, 3.33 GHz)
CPU Name:	Intel Xeon X5680
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	2
CPU Characteristics:	Six Core, 3.33 GHz, 6.4 GT/s QPI Intel Turbo Boost Technology up to 3.6 GHz Hyper-Threading Technology enabled
CPU MHz:	3333
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6*4GB DDR3-1333 CL9 RDIMMs)
Disk Subsystem:	None
Other Hardware:	None
Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Number of Adapters:	2
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x QDR
Ports Used:	1
Interconnect Type:	InfiniBand

Software

Adapter:	Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)
Adapter Driver:	OFED-1.4.2
Adapter Firmware:	2.7.200
Operating System:	SUSE Linux Enterprise Server 11 SP1, Kernel 2.6.32.13-0.4-default
Local File System:	NFSv3
Shared File System:	NFSv3 IPoIB
System State:	Multi-user, run level 3
Other Software:	SGI ProPack 7 for Linux Service Pack 1, SGI Tempo V 2.1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5680, 3.33 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.14

MPI2007 license: 4

Test date: Sep-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Oct-2010

Node Description: SGI InfiniteStorage Nexus 2000 NAS

Hardware		Software
Number of nodes:	1	Adapter:
Uses of the node:	fileserver	Mellanox MT26418 ConnectX, MT25208 InfiniHost III Ex (PCIe x8 Gen2 5 GT/s, PCIe x8 Gen1 2.5 GT/s)
Vendor:	SGI	Adapter Driver: OFED-1.4.0
Model:	SGI Altix XE 270 (Intel Xeon X5670, 2.93 GHz)	Adapter Firmware: 2.6.0 and 5.2.0
CPU Name:	Intel Xeon X5670	Operating System: SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
CPU(s) orderable:	1-2 chips	Local File System: xfs
Chips enabled:	2	Shared File System: --
Cores enabled:	12	System State: Multi-user, run level 3
Cores per chip:	6	Other Software: SGI Foundation Software 2
Threads per core:	2	
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz Hyper-Threading Technology enabled	
CPU MHz:	2933	
Primary Cache:	32 KB I + 32 KB D on chip per core	
Secondary Cache:	256 KB I+D on chip per chip	
L3 Cache:	12 MB I+D on chip per chip	
Other Cache:	None	
Memory:	24 GB (6*4GB DDR3-1333 CL9 DIMMs)	
Disk Subsystem:	8.8 TB RAID 5 60 x 146 GB SAS (Seagate Cheetah 15K.5)	
Other Hardware:	None	
Adapter:	Mellanox MT26418 ConnectX, MT25208 InfiniHost III Ex (PCIe x8 Gen2 5 GT/s, PCIe x8 Gen1 2.5 GT/s)	
Number of Adapters:	2	
Slot Type:	PCIe x8 Gen2, PCIe x8 Gen1	
Data Rate:	InfiniBand 4x DDR	
Ports Used:	2	
Interconnect Type:	InfiniBand	

Interconnect Description: InfiniBand (MPI)

Hardware		Software
Vendor:	Mellanox Technologies and SGI	
Model:	MT26428 ConnectX	
Switch Model:	SGI QDR_1.5_HYPR_2454 with Mellanox Device 48438 (Infiniscale IV)	
Number of Switches:	32	
Number of Ports:	36	
Data Rate:	InfiniBand 4x QDR	
Firmware:	5030005	
Topology:	Enhanced Hypercube	
Primary Use:	MPI traffic	



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5680, 3.33 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.14

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Sep-2010

Hardware Availability: May-2010

Software Availability: Oct-2010

Interconnect Description: InfiniBand (I/O)

Hardware

Vendor: Mellanox Technologies and SGI
Model: MT26428 ConnectX
Switch Model: SGI QDR_1.5_HYPR_2454 with Mellanox Device 48438
(Infiniscale IV)
Number of Switches: 16
Number of Ports: 36
Data Rate: InfiniBand 4x QDR
Firmware: 5030005
Topology: Enhanced Hypercube
Primary Use: I/O traffic

Software

Submit Notes

The config file option 'submit' was used.

General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
export MPI_IB_RAILS=2
ulimit -s unlimited
```

BIOS settings:

```
AMI BIOS version 080016
Hyper-Threading Technology enabled (default)
Intel Turbo Boost Technology enabled (default)
Intel Turbo Boost Technology activated in the OS via
/etc/init.d/acpid start
/etc/init.d/powersaved start
powersave -f
```

Job Placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 2 switches for 96 ranks, 4 switches for 192 ranks, 8 switches for 384 ranks, 16 switches for 768 ranks, 32 switches for 1536 ranks.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5680, 3.33 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.14

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Sep-2010

Hardware Availability: May-2010

Software Availability: Oct-2010

Base Compiler Invocation (Continued)

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

Base Optimization Flags

C benchmarks:

-O3 -xSSE4.2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE4.2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE4.2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE4.2 -no-prec-div

Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8400EX
(Intel Xeon X5680, 3.33 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 3.14

MPI2007 license: 4

Test date: Sep-2010

Test sponsor: SGI

Hardware Availability: May-2010

Tested by: SGI

Software Availability: Oct-2010

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel111_flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.

Report generated on Tue Jul 22 13:41:10 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 22 September 2010.