



# SPEC<sup>®</sup> MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 43.5

MPI2007 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2011

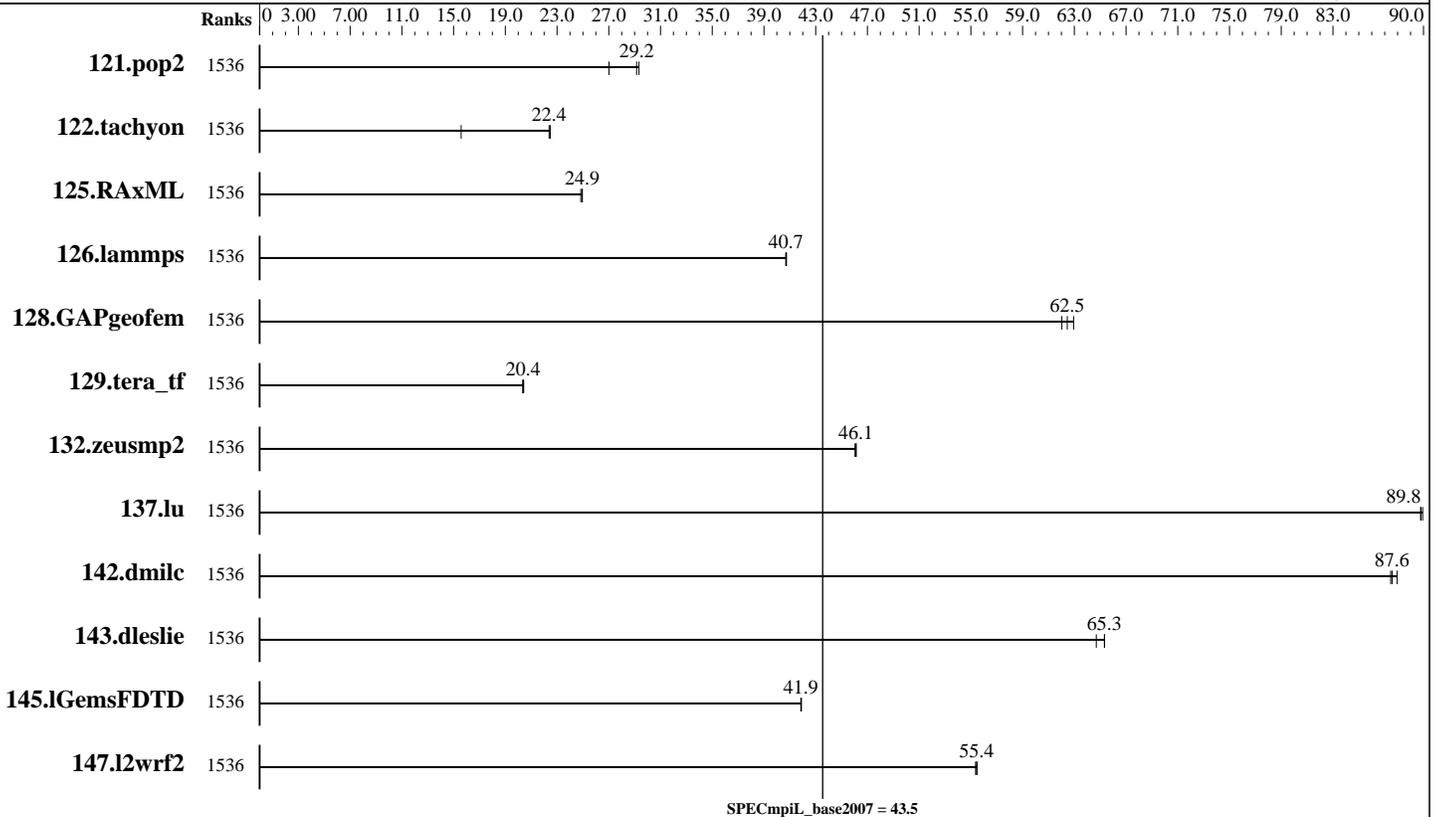

## Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	1536	144	27.0	<b>133</b>	<b>29.2</b>	133	29.3							
122.tachyon	1536	125	15.6	86.5	22.5	<b>86.8</b>	<b>22.4</b>							
125.RAxML	1536	117	25.0	<b>117</b>	<b>24.9</b>	118	24.8							
126.lammps	1536	60.4	40.7	60.4	40.7	<b>60.4</b>	<b>40.7</b>							
128.GAPgeofem	1536	95.7	62.0	94.3	62.9	<b>95.0</b>	<b>62.5</b>							
129.tera_tf	1536	53.8	20.4	54.0	20.3	<b>53.9</b>	<b>20.4</b>							
132.zeusmp2	1536	46.0	46.1	46.0	46.0	<b>46.0</b>	<b>46.1</b>							
137.lu	1536	46.7	89.9	46.8	89.8	<b>46.8</b>	<b>89.8</b>							
142.dmilc	1536	<b>42.1</b>	<b>87.6</b>	41.9	88.0	42.1	87.5							
143.dleslie	1536	<b>47.5</b>	<b>65.3</b>	47.4	65.3	47.9	64.7							
145.lGemsFDTD	1536	105	41.9	105	41.9	<b>105</b>	<b>41.9</b>							
147.l2wrf2	1536	148	55.5	<b>148</b>	<b>55.4</b>	148	55.4							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SPECmpiL\_peak2007 = Not Run

SGI Altix ICE 8400EX  
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL\_base2007 = 43.5

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2011

### Hardware Summary

### Software Summary

Type of System: Homogeneous  
 Compute Node: SGI Altix ICE 8400EX Compute Node  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI InfiniteStorage Nexis 2000 NAS  
 Total Compute Nodes: 128  
 Total Chips: 256  
 Total Cores: 1536  
 Total Threads: 3072  
 Total Memory: 3 TB  
 Base Ranks Run: 1536  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

C Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309  
 C++ Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309  
 Fortran Compiler: Intel Fortran Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: SGI MPT 2.04 Patch 10789  
 Other MPI Info: OFED 1.4.2  
 Pre-processors: None  
 Other Software: None

## Node Description: SGI Altix ICE 8400EX Compute Node

### Hardware

### Software

Number of nodes: 128  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI Altix ICE 8400EX (Intel Xeon X5690, 3.46 GHz)  
 CPU Name: Intel Xeon X5690  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 12  
 Cores per chip: 6  
 Threads per core: 2  
 CPU Characteristics: Six Core, 3.46 GHz, 6.4 GT/s QPI  
 Intel Turbo Boost Technology up to 3.73 GHz  
 Hyper-Threading Technology enabled  
 CPU MHz: 3467  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
 Number of Adapters: 2  
 Slot Type: PCIe x8 Gen2  
 Data Rate: InfiniBand 4x QDR  
 Ports Used: 1  
 Interconnect Type: InfiniBand

Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
 Adapter Driver: OFED-1.4.2  
 Adapter Firmware: 2.7.8200  
 Operating System: SUSE Linux Enterprise Server 11 SP1, Kernel 2.6.32.13-0.4-default  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Multi-user, run level 3  
 Other Software: SGI ProPack 7SP1 for Linux, Build 701r3.sles11-1005252113  
 SGI Tempo Compute Node 2.1, Build 701r3.sles11-1005252113



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 43.5

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2011

## Node Description: SGI InfiniteStorage Nexis 2000 NAS

### Hardware

Number of nodes: 1  
 Uses of the node: fileserver  
 Vendor: SGI  
 Model: SGI Altix XE 270 (Intel Xeon X5670, 2.93 GHz)  
 CPU Name: Intel Xeon X5670  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 12  
 Cores per chip: 6  
 Threads per core: 2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 Hyper-Threading Technology enabled  
 CPU MHz: 2933  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per chip  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12\*8 GB DDR3-1333 CL9 DIMMs)  
 Disk Subsystem: 8.8 TB RAID 5  
 60 x 146 GB SAS (Seagate Cheetah 15K.5)  
 Other Hardware: None  
 Adapter: Mellanox MT26428 ConnectX IB QDR  
 (PCIe x8 Gen2 5 GT/s)  
 Number of Adapters: 2  
 Slot Type: PCIe x8 Gen2  
 Data Rate: InfiniBand 4x QDR  
 Ports Used: 2  
 Interconnect Type: InfiniBand

### Software

Adapter: Mellanox MT26428 ConnectX IB QDR  
 (PCIe x8 Gen2 5 GT/s)  
 Adapter Driver: OFED-1.4.0  
 Adapter Firmware: 2.7.0  
 Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Local File System: xfs  
 Shared File System: --  
 System State: Multi-user, run level 3  
 Other Software: SGI Foundation Software 2, Build  
 700r3.sles11-1004061553

## Interconnect Description: InfiniBand (MPI and I/O)

### Hardware

Vendor: Mellanox Technologies and SGI  
 Model: None  
 Switch Model: SGI QDR\_1.5\_HYPR\_2454 with Mellanox Device 48438  
 (Infiniscale IV)  
 Number of Switches: 32  
 Number of Ports: 36  
 Data Rate: InfiniBand 4x QDR  
 Firmware: 5040005  
 Topology: Enhanced Hypercube  
 Primary Use: MPI and I/O traffic

### Software



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 43.5

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2011

## Submit Notes

The config file option 'submit' was used.

## General Notes

### Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_BUFS_THRESHOLD=1
export MPI_IB_RAILS=2
ulimit -s unlimited
```

### BIOS settings:

```
AMI BIOS version 080016
Hyper-Threading Technology enabled (default)
Intel Turbo Boost Technology enabled (default)
Intel Turbo Boost Technology activated in the OS via
/etc/init.d/acpid start
/etc/init.d/powersaved start
powersave -f
```

### Job Placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 2 switches for 96 ranks, 4 switches for 192 ranks, 8 switches for 384 ranks, 16 switches for 768 ranks, 32 switches for 1536 ranks.

### Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

## Base Compiler Invocation

### C benchmarks:

icc

### C++ benchmarks:

126.lammps: icpc

### Fortran benchmarks:

ifort

### Benchmarks using both Fortran and C:

icc ifort



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 43.5

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Aug-2011

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

## Base Optimization Flags

C benchmarks:

-O3 -xSSE4.2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xSSE4.2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE4.2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE4.2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel12\\_flags.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel12\\_flags.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.xml)



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(Intel Xeon X5690, 3.46 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 43.5

**MPI2007 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Jun-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Aug-2011

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.  
Report generated on Tue Jul 22 13:43:17 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 14 July 2011.