



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

**SPECmpiM\_peak2007 = Not Run**

Big Red II (AMD Opteron 6380, 2.5 GHz)

**SPECmpiM\_base2007 = 2.44**

MPI2007 license: 3440A


Test date: Mar-2015

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Jun-2013

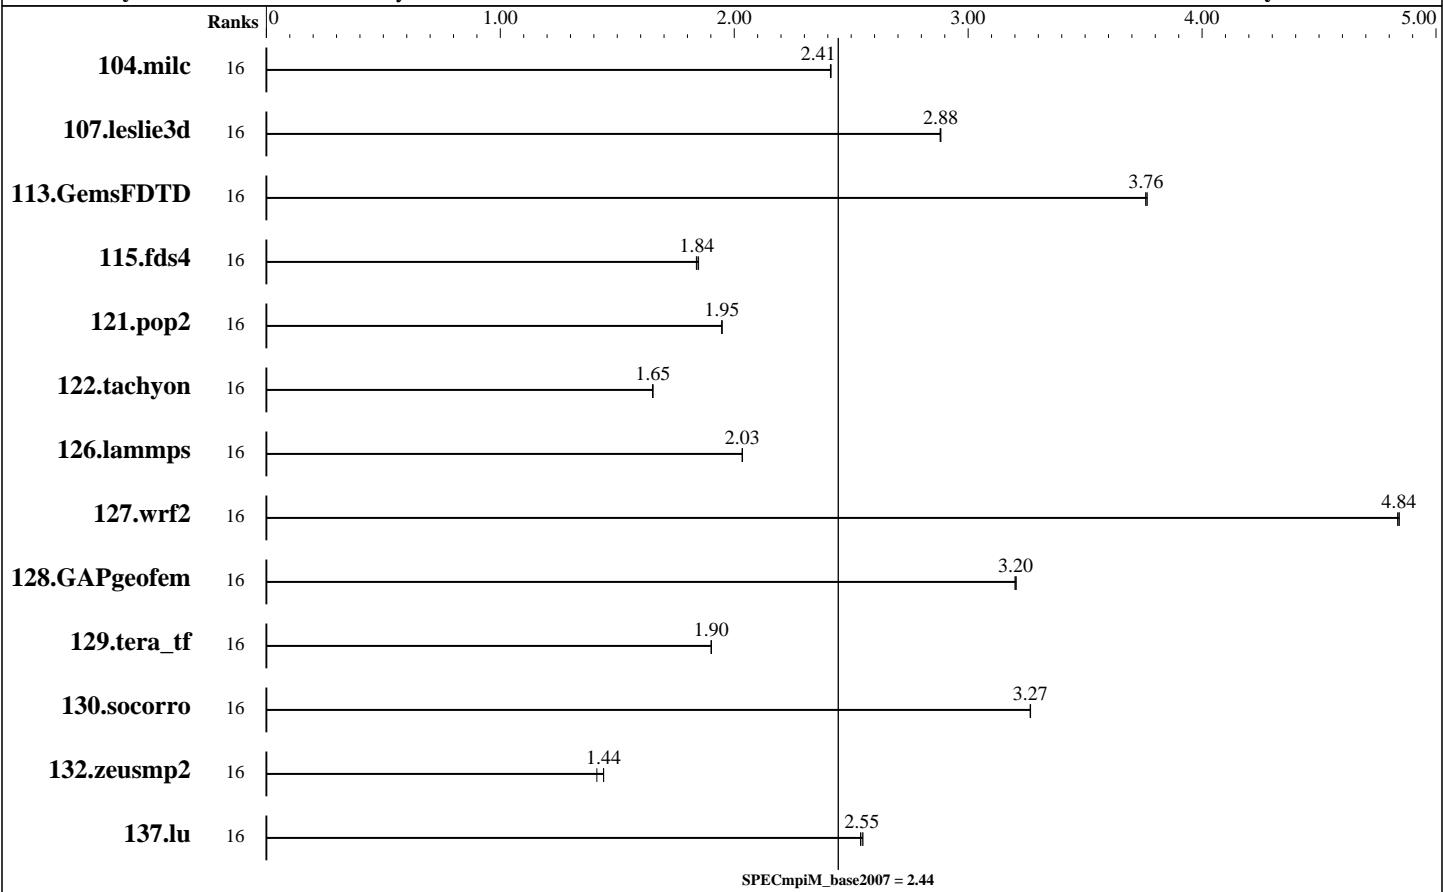

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	16	648	2.41	<b>649</b>	<b>2.41</b>	649	2.41									
107.leslie3d	16	1811	2.88	1812	2.88	<b>1811</b>	<b>2.88</b>									
113.GemsFDTD	16	1678	3.76	1675	3.77	<b>1678</b>	<b>3.76</b>									
115.fds4	16	<b>1060</b>	<b>1.84</b>	1061	1.84	1056	1.85									
121.pop2	16	2120	1.95	2120	1.95	<b>2120</b>	<b>1.95</b>									
122.tachyon	16	1695	1.65	<b>1693</b>	<b>1.65</b>	1693	1.65									
126.lammps	16	1433	2.03	1432	2.04	<b>1433</b>	<b>2.03</b>									
127.wrf2	16	1612	4.84	<b>1610</b>	<b>4.84</b>	1610	4.84									
128.GAPgeomfem	16	645	3.20	644	3.21	<b>645</b>	<b>3.20</b>									
129.tera_tf	16	<b>1455</b>	<b>1.90</b>	1455	1.90	1455	1.90									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

[SPECmpIM\\_peak2007 = Not Run](#)

Big Red II (AMD Opteron 6380, 2.5 GHz)

[SPECmpIM\\_base2007 = 2.44](#)

MPI2007 license: 3440A

Test date: Mar-2015

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Jun-2013

## Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	16	1169	3.27	1168	3.27	<u>1169</u>	<u>3.27</u>							
132.zeusmp2	16	<b>2153</b>	<b>1.44</b>	2196	1.41	2152	1.44							
137.lu	16	1441	2.55	<u>1443</u>	<u>2.55</u>	1447	2.54							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary				Software Summary			
Type of System:	Homogeneous	C Compiler:	Intel C Composer XE 2013 for Linux, Version 13.1.3.192 Build 20130607				
Compute Node:	Big Red II Node	C++ Compiler:	Intel C++ Composer XE 2013 for Linux, Version 13.1.3.192 Build 20130607				
Interconnects:	Infiniband (QDR)	Fortran Compiler:	Intel Fortran Composer XE 2013 for Linux, Version 13.1.3.192 Build 20130607				
Cray Gemini	Data Capacitor II	Base Pointers:	64-bit				
File Server Node:	1	Peak Pointers:	64-bit				
Total Compute Nodes:	2	MPI Library:	Cray MPI (MPT) 7.1.2				
Total Chips:	32	Other MPI Info:	None				
Total Cores:	32	Pre-processors:	No				
Total Threads:	32	Other Software:	None				
Total Memory:	64 GB						
Base Ranks Run:	16						
Minimum Peak Ranks:	--						
Maximum Peak Ranks:	--						

## Node Description: Big Red II Node

Hardware		Software	
Number of nodes:	1	Adapter:	Mellanox ConnectX MHQH29-XTC
Uses of the node:	compute	Adapter Driver:	1.0-ofed1.5.4
Vendor:	Cray	Adapter Firmware:	2.9.1000
Model:	XE6	Adapter:	Cray Gemini
CPU Name:	AMD Opteron 6380	Adapter Driver:	Proprietary Cray_kgni 0.17
CPU(s) orderable:	1-2 chips	Adapter Firmware:	
Chips enabled:	2	Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Cray Linux Environment 4.2 Kernel 2.6.32.59-0.7.1_1.0402.7496-cray_gem_c
Cores enabled:	32	Local File System:	None
Cores per chip:	16	Shared File System:	lustre
Threads per core:	1	System State:	Multi-User
CPU Characteristics:	AMD Turbo CORE technology up to 3.40 GHz 2500	Other Software:	TORQUE-2.5.7
CPU MHz:			
Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core		
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores		
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores		
Other Cache:	None		
Memory:	64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC running at 1600 MHz and CL11)		
Disk Subsystem:	None		
Other Hardware:	None		
Adapter:	Mellanox ConnectX MHQH29-XTC		
Number of Adapters:	1		
Slot Type:	PCIe x8 Gen 2		

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

[SPECmpIM\\_peak2007 = Not Run](#)

Big Red II (AMD Opteron 6380, 2.5 GHz)

SPECmpIM\_base2007 = 2.44

MPI2007 license: 3440A

Test date: Mar-2015

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Jun-2013

## Node Description: Big Red II Node

Data Rate:	40Gbps
Ports Used:	1
Interconnect Type:	40 Gigabit Infiniband (QDR)
Adapter:	Cray Gemini
Number of Adapters:	1
Slot Type:	AMD HyperTransport 3
Data Rate:	76.8Gbps
Ports Used:	1
Interconnect Type:	Gemini

## Node Description: Data Capacitor II

### Hardware

Number of nodes:	2
Uses of the node:	fileserver
Vendor:	DDN
Model:	DDN SFA12K
CPU Name:	Intel Xeon CPU E5-2620
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	1
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB
Disk Subsystem:	30 TB RAID 6, 10 (8 + 2) x 3 TB SATA (Hitachi, 7200RPM, 6.0Gbps)
Other Hardware:	None
Adapter:	Mellanox ConnectX MHQH29-XTC
Number of Adapters:	1
Slot Type:	PCIe x8 Gen 2
Data Rate:	40Gbps
Ports Used:	1
Interconnect Type:	40 Gigabit Infiniband (QDR)

### Software

Adapter:	Mellanox ConnectX MHQH29-XTC
Adapter Driver:	1.0-ofed1.5.4
Adapter Firmware:	2.9.1000
Operating System:	CentOS 6.2
Local File System:	Linux/ext4
Shared File System:	lustre
System State:	Multi-User
Other Software:	None

## Interconnect Description: Infiniband (QDR)

### Hardware

Vendor:	DDN
Model:	Mellanox SX6506
Switch Model:	Mellanox SX6506

### Software

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

SPECmpIM\_peak2007 = Not Run

Big Red II (AMD Opteron 6380, 2.5 GHz)

SPECmpIM\_base2007 = 2.44

MPI2007 license: 3440A

Test date: Mar-2015

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Jun-2013

## Interconnect Description: Infiniband (QDR)

Number of Switches: 1  
Number of Ports: 108  
Data Rate: 56 Gbps  
Firmware: mellanox SX6506  
Topology: switched  
Primary Use: Lustre fileserver

## Interconnect Description: Cray Gemini

Hardware	Software
Vendor: Cray	
Model: Cray Gemini	
Switch Model: Cray Gemini	
Number of Switches: 264	
Number of Ports: 48	
Data Rate: 9.36 GB/s	
Firmware: 0.17	
Topology: 3D Torus	
Primary Use: MPI traffic	

## Submit Notes

The config file option 'submit' was used.

## General Notes

130.socorro (base): "nullify\_ptrs" src.alt was used.

MPI startup command:

```
aprun command was used to start MPI jobs. A flag below
is used to place processes onto 16 cores out of 32 on a node:
-cc 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
```

```
export MPICH_NO_BUFFER_ALIAS_CHECK=true
If set, the buffer alias error check for collectives is
disabled. The MPI standard does not allow aliasing of type
OUT or INOUT parameters on the same collective function
call. The default is false.
```

Network:  
3D Torus

Job placement:

```
PBS is used for job placement.
Compute nodes are selected by PBS.
No specific node selection is used.
```



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

Big Red II (AMD Opteron 6380, 2.5 GHz)

SPECmpIM\_peak2007 = Not Run

SPECmpIM\_base2007 = 2.44

MPI2007 license: 3440A

Test date: Mar-2015

Test sponsor: Indiana University

Hardware Availability: Apr-2013

Tested by: Indiana University

Software Availability: Jun-2013

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

126.lammps: CC

Fortran benchmarks:

ftn

Benchmarks using both Fortran and C:

cc ftn

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX

130.socorro: -assume nostd\_intent\_in

## Base Optimization Flags

C benchmarks:

-O3 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -no-prec-div

Fortran benchmarks:

-O3 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -no-prec-div

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel140\\_flags.20150429.html](http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20150429.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel140\\_flags.20150429.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20150429.xml)



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Cray

Big Red II (AMD Opteron 6380, 2.5 GHz)

**SPECmpiM\_peak2007 = Not Run**

**SPECmpiM\_base2007 = 2.44**

**MPI2007 license:** 3440A

**Test date:** Mar-2015

**Test sponsor:** Indiana University

**Hardware Availability:** Apr-2013

**Tested by:** Indiana University

**Software Availability:** Jun-2013

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.

Report generated on Wed Apr 29 12:32:40 2015 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 29 April 2015.