



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,
DDR4-2133 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 20.7

MPI2007 license: 13


Test date: May-2015

Test sponsor: Intel Corporation

Hardware Availability: May-2015

Tested by: Pavel Shelepuhin

Software Availability: Apr-2015

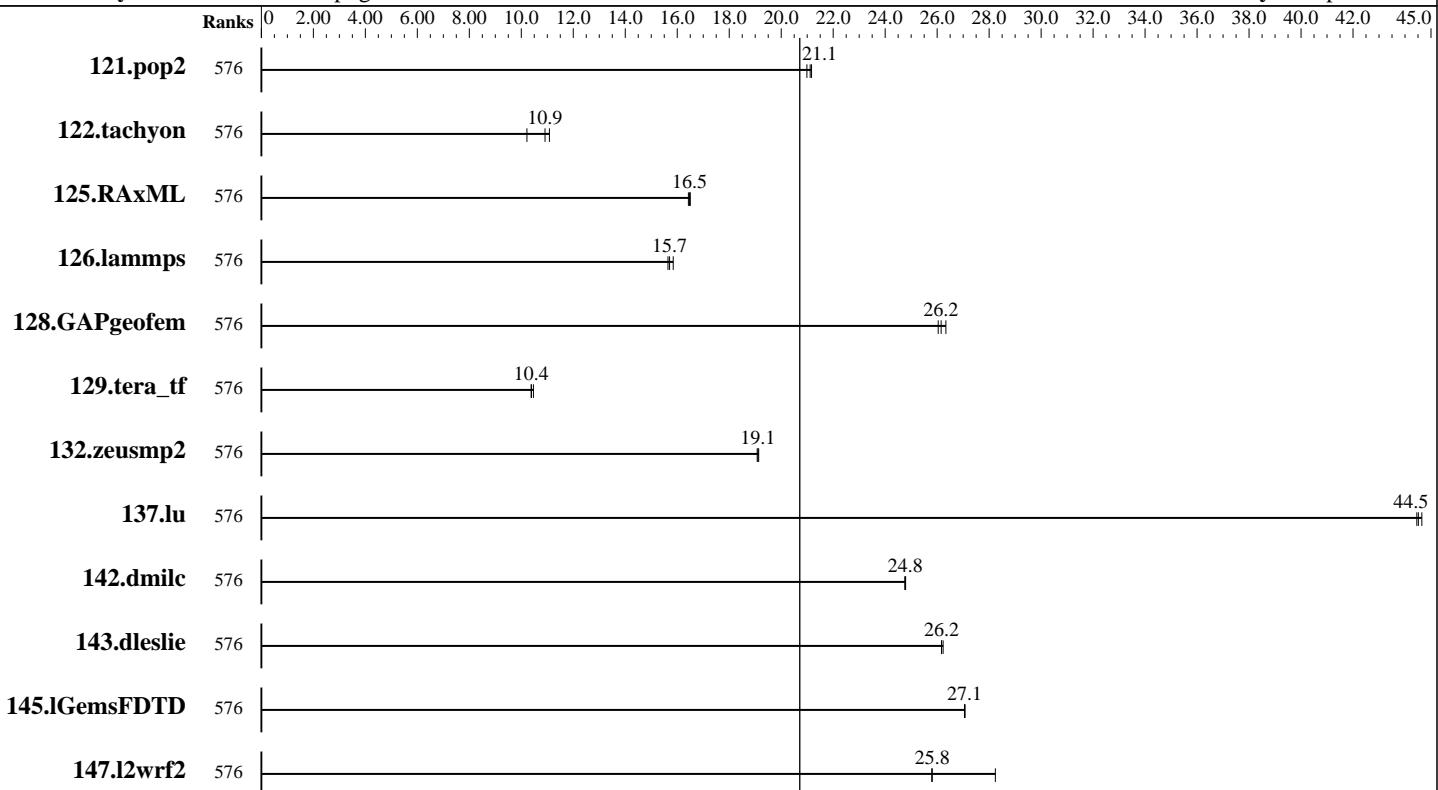

Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	576	185	21.0	184	21.2	<u>184</u>	<u>21.1</u>							
122.tachyon	576	190	10.2	<u>178</u>	<u>10.9</u>	175	11.1							
125.RAxML	576	178	16.4	<u>177</u>	<u>16.5</u>	177	16.5							
126.lammps	576	<u>157</u>	<u>15.7</u>	157	15.6	155	15.8							
128.GAPgeofem	576	228	26.0	<u>227</u>	<u>26.2</u>	225	26.3							
129.tera_tf	576	105	10.5	106	10.4	<u>106</u>	<u>10.4</u>							
132.zeusmp2	576	<u>111</u>	<u>19.1</u>	111	19.1	111	19.1							
137.lu	576	94.5	44.5	<u>94.4</u>	<u>44.5</u>	94.1	44.6							
142.dmilc	576	<u>149</u>	<u>24.8</u>	149	24.8	149	24.8							
143.dleslie	576	<u>118</u>	<u>26.2</u>	118	26.2	118	26.2							
145.lGemsFDTD	576	163	27.1	163	27.1	<u>163</u>	<u>27.1</u>							
147.l2wrf2	576	318	25.8	<u>318</u>	<u>25.8</u>	291	28.2							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,
DDR4-2133 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 20.7

MPI2007 license: 13

Test date: May-2015

Test sponsor: Intel Corporation

Hardware Availability: May-2015

Tested by: Pavel Shelepuhin

Software Availability: Apr-2015

Hardware Summary

Type of System:	Homogeneous
Compute Node:	Endeavor Node
Interconnects:	IB Switch Gigabit Ethernet
File Server Node:	NFS
Total Compute Nodes:	8
Total Chips:	32
Total Cores:	576
Total Threads:	1152
Total Memory:	4 TB
Base Ranks Run:	576
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C++ Composer XE 2015 for Linux, Version 15.0.3.187 Build 20150407
C++ Compiler:	Intel C++ Composer XE 2015 for Linux, Version 15.0.3.187 Build 20150407
Fortran Compiler:	Intel Fortran Composer XE 2015 for Linux, Version 15.0.3.187 Build 20150407
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	Intel MPI Library 5.0.3.048 for Linux
Other MPI Info:	None
Pre-processors:	No
Other Software:	None

Node Description: Endeavor Node

Hardware

Number of nodes:	8
Uses of the node:	compute
Vendor:	Intel
Model:	S4TR2KU1Q
CPU Name:	Intel Xeon E7-8890 v3
CPU(s) orderable:	1-4 chips
Chips enabled:	4
Cores enabled:	72
Cores per chip:	18
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology disabled, 9.6 GT/s QPI, Hyper-Threading enabled
CPU MHz:	2500
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip, 45 MB shared / 18 cores
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-17000R-15, ECC)
Disk Subsystem:	ATA INTEL SSDSA2BZ20, SSDSC2BB80
Other Hardware:	None
Adapter:	Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller
Number of Adapters:	1
Slot Type:	PCI-Express x8
Data Rate:	1Gbps Ethernet
Ports Used:	2
Interconnect Type:	Ethernet
Adapter:	Mellanox MCX353A-FCAT ConnectX-3
Number of Adapters:	1
Slot Type:	PCIe x8 Gen3
Data Rate:	InfiniBand 4x FDR
Ports Used:	1
Interconnect Type:	InfiniBand

Software

Adapter:	Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller
Adapter Driver:	e1000
Adapter Firmware:	None
Adapter:	Mellanox MCX353A-FCAT ConnectX-3
Adapter Driver:	OFED 3.5-2-MIC-rc1
Adapter Firmware:	2.31.5050
Operating System:	Red Hat EL 6.5, kernel 2.6.32-358
Local File System:	Linux/xfs
Shared File System:	NFS
System State:	Multi-User
Other Software:	IBM Platform LSF Standard 9.1.1.1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,
DDR4-2133 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 20.7

MPI2007 license: 13

Test date: May-2015

Test sponsor: Intel Corporation

Hardware Availability: May-2015

Tested by: Pavel Shelepuhin

Software Availability: Apr-2015

Node Description: NFS

Hardware		Software
Number of nodes:	1	Adapter: Intel 82563GB Dual-Port Gigabit
Uses of the node:	fileserver	Ethernet Controller
Vendor:	Intel	Adapter Driver: e1000e
Model:	S7000FC4UR	Adapter Firmware: N/A
CPU Name:	Intel Xeon CPU	Operating System: RedHat EL 5 Update 4
CPU(s) orderable:	1-4 chips	Local File System: None
Chips enabled:	4	Shared File System: NFS
Cores enabled:	16	System State: Multi-User
Cores per chip:	4	Other Software: None
Threads per core:	2	
CPU Characteristics:	--	
CPU MHz:	2926	
Primary Cache:	32 KB I + 32 KB D on chip per core	
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores	
L3 Cache:	None	
Other Cache:	None	
Memory:	64 GB	
Disk Subsystem:	8 disks, 500GB/disk, 2.7TB total	
Other Hardware:	None	
Adapter:	Intel 82563GB Dual-Port Gigabit Ethernet Controller	
Number of Adapters:	1	
Slot Type:	PCI-Express x8	
Data Rate:	1Gbps Ethernet	
Ports Used:	1	
Interconnect Type:	Ethernet	

Interconnect Description: IB Switch

Hardware		Software
Vendor:	Mellanox	
Model:	Mellanox MSX6025F-1BFR	
Switch Model:	Mellanox MSX6025F-1BFR	
Number of Switches:	46	
Number of Ports:	36	
Data Rate:	InfiniBand 4x FDR	
Firmware:	9.2.8000	
Topology:	Fat tree	
Primary Use:	MPI traffic	



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,
DDR4-2133 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 20.7

MPI2007 license: 13

Test date: May-2015

Test sponsor: Intel Corporation

Hardware Availability: May-2015

Tested by: Pavel Shelepuhin

Software Availability: Apr-2015

Interconnect Description: Gigabit Ethernet

Hardware

Vendor: Force10 Networks, Cisco Systems
 Model: Force10 S50N, Force10 C300, Cisco WS-C4948E-F
 Switch Model: Force10 S50N, Force10 C300, Cisco WS-C4948E-F
 Number of Switches: 13
 Number of Ports: 48
 Data Rate: 1Gbps Ethernet, 10Gbps Ethernet
 Firmware: 8.3.2.0, 12.2(54)WO
 Topology: Star
 Primary Use: Cluster File System

Software

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:

mpieexec.hydra command was used to start MPI jobs.

BIOS settings:

Intel Hyper-Threading Technology (SMT): Enabled (default is Enabled)
 Intel Turbo Boost Technology (Turbo) : Disabled (default is Enabled)

RAM configuration:

Compute nodes have 4x16-GB RDIMM on each memory channel.

Network:

Forty six 36-port switches: 18 core switches and 28 leaf switches.
 Each leaf has one link to each core. Remaining 18 ports on 25 of 28 leafs
 are used for compute nodes. On the remaining 3 leafs the ports are used
 for FS nodes and other peripherals.

Job placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e.
 the minimal needed number of leaf switches was used for each job: 1 switch
 for 144/288/576 ranks.

IBM Platform LSF was used for job submission. It has no impact on performance.
 Information can be found at: <http://www.ibm.com>

Base Compiler Invocation

C benchmarks:
 mpiicc

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,
DDR4-2133 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 20.7

MPI2007 license: 13

Test date: May-2015

Test sponsor: Intel Corporation

Hardware Availability: May-2015

Tested by: Pavel Shelepuhin

Software Availability: Apr-2015

Base Compiler Invocation (Continued)

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

126.lammps: -DMPICH_IGNORE_CXX_SEEK

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20140908.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20140908.xml



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,
DDR4-2133 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 20.7

MPI2007 license: 13

Test date: May-2015

Test sponsor: Intel Corporation

Hardware Availability: May-2015

Tested by: Pavel Shelepuhin

Software Availability: Apr-2015

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Wed Jun 10 11:40:14 2015 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 10 June 2015.