



# SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
(AMD EPYC 7H12, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 33.1

MPI2007 license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jan-2020

Hardware Availability: Jun-2020

Software Availability: Jun-2020

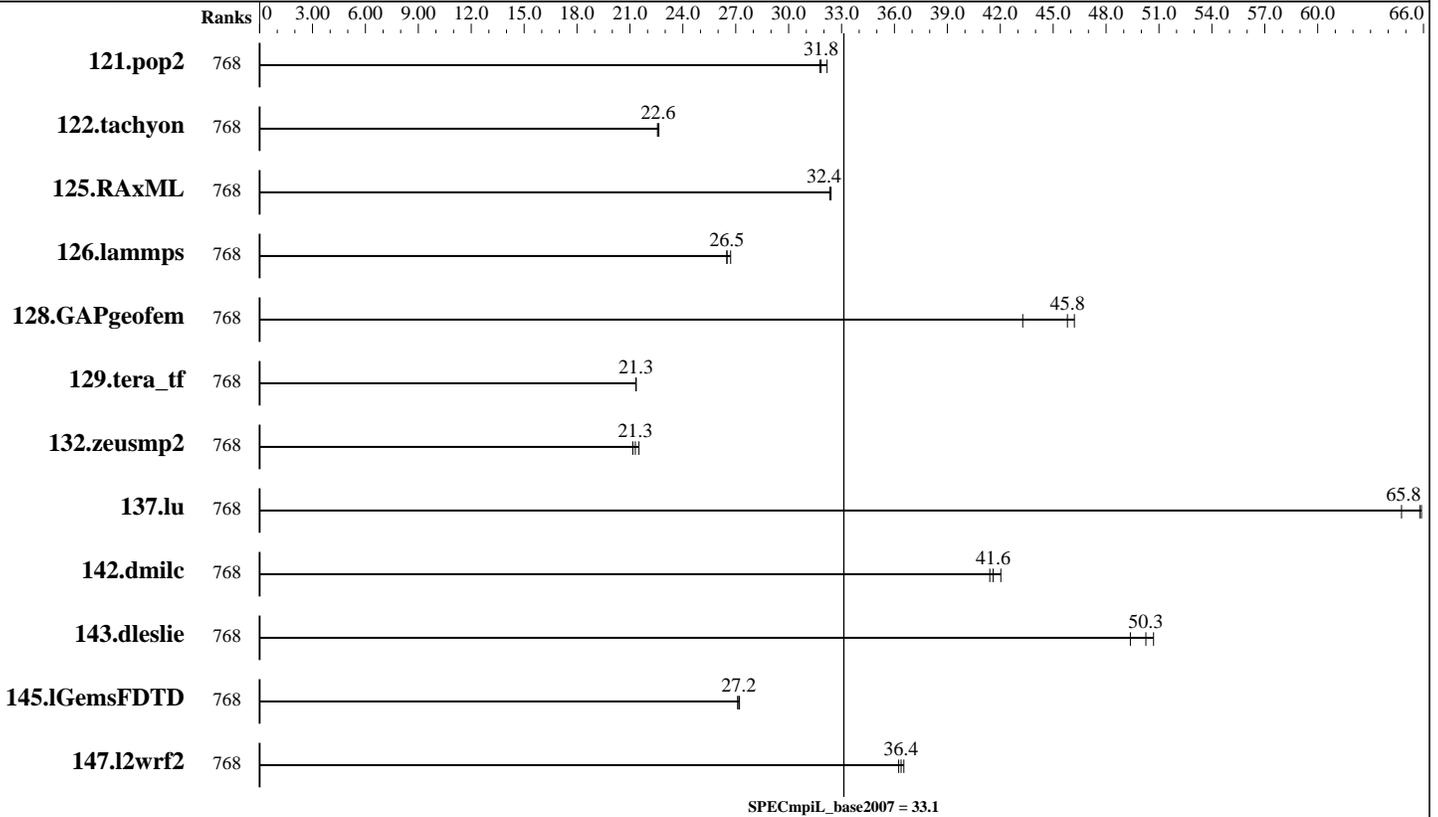

## Results Table

| Benchmark     | Base  |             |             |             |             |             |             | Peak  |         |       |         |       |         |       |
|---------------|-------|-------------|-------------|-------------|-------------|-------------|-------------|-------|---------|-------|---------|-------|---------|-------|
|               | Ranks | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Ranks | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 121.pop2      | 768   | 122         | 31.8        | <u>122</u>  | <u>31.8</u> | 121         | 32.2        |       |         |       |         |       |         |       |
| 122.tachyon   | 768   | 86.2        | 22.6        | <u>86.0</u> | <u>22.6</u> | 85.9        | 22.6        |       |         |       |         |       |         |       |
| 125.RAxML     | 768   | 90.1        | 32.4        | <u>90.2</u> | <u>32.4</u> | 90.3        | 32.3        |       |         |       |         |       |         |       |
| 126.lammps    | 768   | 92.8        | 26.5        | <u>92.8</u> | <u>26.5</u> | 92.1        | 26.7        |       |         |       |         |       |         |       |
| 128.GAPgeofem | 768   | 137         | 43.3        | 128         | 46.2        | <u>130</u>  | <u>45.8</u> |       |         |       |         |       |         |       |
| 129.tera_tf   | 768   | 51.5        | 21.3        | 51.5        | 21.4        | <u>51.5</u> | <u>21.3</u> |       |         |       |         |       |         |       |
| 132.zeusmp2   | 768   | 98.5        | 21.5        | 100         | 21.2        | <u>99.5</u> | <u>21.3</u> |       |         |       |         |       |         |       |
| 137.lu        | 768   | 63.8        | 65.9        | <u>63.9</u> | <u>65.8</u> | 64.9        | 64.8        |       |         |       |         |       |         |       |
| 142.dmilc     | 768   | 89.0        | 41.4        | 87.6        | 42.0        | <u>88.6</u> | <u>41.6</u> |       |         |       |         |       |         |       |
| 143.dleslie   | 768   | <u>61.7</u> | <u>50.3</u> | 62.8        | 49.4        | 61.2        | 50.7        |       |         |       |         |       |         |       |
| 145.lGemsFDTD | 768   | 162         | 27.2        | <u>162</u>  | <u>27.2</u> | 163         | 27.1        |       |         |       |         |       |         |       |
| 147.l2wrf2    | 768   | 225         | 36.5        | <u>226</u>  | <u>36.4</u> | 226         | 36.2        |       |         |       |         |       |         |       |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECmpiL\_peak2007 = Not Run

ThinkSystem SR665  
(AMD EPYC 7H12, 2.6 GHz)

SPECmpiL\_base2007 = 33.1

MPI2007 license: 28

Test date: Jan-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2020

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: ThinkSystem SR665  
 Interconnect: Mellanox ConnectX-6 HDR  
 File Server Node: NFS  
 Total Compute Nodes: 6  
 Total Chips: 12  
 Total Cores: 768  
 Total Threads: 768  
 Total Memory: 6 TB  
 Base Ranks Run: 768  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Compiler 20.0 for Linux  
 Version 19.1.0.166 Build 20191121  
 C++ Compiler: Intel C++ Compiler 20.0 for Linux  
 Version 19.1.0.166 Build 20191121  
 Fortran Compiler: Intel Fortran Compiler 20.0 for Linux  
 Version 19.1.0.166 Build 20191121  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 MPI Library: Open MPI Library  
 Version 4.0.2  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: None

## Node Description: ThinkSystem SR665

### Hardware

Number of nodes: 6  
 Uses of the node: compute  
 Vendor: Lenovo Global Technology  
 Model: SR665  
 CPU Name: AMD EPYC 7H12  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 128  
 Cores per chip: 64  
 Threads per core: 1  
 CPU Characteristics: None  
 CPU MHz: 2600  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 256 MB I+D on chip per chip  
 16 MB shared / 4 cores  
 Other Cache: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
 Disk Subsystem: 1 x 480 GB SATA 2.5" SSD  
 Other Hardware: None  
 Adapter: Mellanox ConnectX-6 HDR Infiniband  
 Number of Adapters: 1  
 Slot Type: PCI-Express 4.0 x16  
 Data Rate: 200 Gbs/s  
 Ports Used: 1  
 Interconnect Type: Mellanox ConnectX-6 HDR Infiniband Adapter

### Software

Adapter: Mellanox ConnectX-6 HDR Infiniband  
 Adapter Driver: 4.7-1.0.0.1.2  
 Adapter Firmware: 20.25.2006  
 Operating System: Red Hat Enterprise Linux Server release 8.1,  
 4.18.0-147.el8.x86\_64  
 Local File System: xfs  
 Shared File System: None  
 System State: Multi-user, run level 3  
 Other Software: None



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECmpiL\_peak2007 = Not Run

ThinkSystem SR665  
(AMD EPYC 7H12, 2.6 GHz)

SPECmpiL\_base2007 = 33.1

MPI2007 license: 28

Test date: Jan-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2020

### Node Description: NFS

| Hardware             |   | Software            |   |
|----------------------|---|---------------------|---|
| Number of nodes:     | 1   | Adapter:            | Mellanox ConnectX-6 HDR Infiniband          |
| Uses of the node:    | Fileserver  | Adapter Driver:     | 4.7-1.0.0.1.2                               |
| Vendor:              | Lenovo Global Technology                              | Adapter Firmware:   | 20.25.2006                                  |
| Model:               | ThinkSystem SR665                                     | Operating System:   | Red Hat Enterprise Linux Server release 8.1 |
| CPU Name:            | AMD EPYC 7H12 CPU                                     | Local File System:  | None  |
| CPU(s) orderable:    | 1-2 chips   | Shared File System: | NFS   |
| Chips enabled:       | 2   | System State:       | Multi-User, run level 3                     |
| Cores enabled:       | 128   | Other Software:     | None  |
| Cores per chip:      | 64  |                     |   |
| Threads per core:    | 1   |                     |   |
| CPU Characteristics: | None  |                     |   |
| CPU MHz:             | 2600  |                     |   |
| Primary Cache:       | 32 KB I + 32 KB D on chip per core                    |                     |   |
| Secondary Cache:     | 512 KB I+D on chip per core                           |                     |   |
| L3 Cache:            | 256 MB I+D on chip per chip<br>16 MB shared / 4 cores |                     |   |
| Other Cache:         | None  |                     |   |
| Memory:              | 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)                   |                     |   |
| Disk Subsystem:      | 1 x 480 GB SATA 2.5" SSD                              |                     |   |
| Other Hardware:      | None  |                     |   |
| Adapter:             | Mellanox ConnectX-6 HDR Infiniband                    |                     |   |
| Number of Adapters:  | 1   |                     |   |
| Slot Type:           | PCI-Express 4.0 x16                                   |                     |   |
| Data Rate:           | 200 Gb/s  |                     |   |
| Ports Used:          | 1   |                     |   |
| Interconnect Type:   | Mellanox ConnectX-6 HDR Infiniband                    |                     |   |

### Interconnect Description: Mellanox ConnectX-6 HDR

| Hardware            |                               | Software |  |
|---------------------|-------------------------------|----------|--|
| Vendor:             | Mellanox                      |          |  |
| Model:              | Infiniband EDR 100Gb/s Switch |          |  |
| Switch Model:       | SB7800 Series                 |          |  |
| Number of Switches: | 1                             |          |  |
| Number of Ports:    | 36                            |          |  |
| Data Rate:          | 100 Gb/s                      |          |  |
| Firmware:           | 3.9.0300                      |          |  |
| Topology:           | Mesh                          |          |  |
| Primary Use:        | MPI Traffic                   |          |  |

### Submit Notes

The config file option 'submit' was used.



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiL\_peak2007 = Not Run

ThinkSystem SR665  
(AMD EPYC 7H12, 2.6 GHz)

SPECmpiL\_base2007 = 33.1

MPI2007 license: 28

Test date: Jan-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2020

## General Notes

MPI startup command:

mpiexec command was used to start MPI jobs.

RAM configuration:

Compute nodes have 1 x 32 GB RDIMM on each memory channel.

Add "idle=poll" into grub

BIOS settings:

Operating Mode : Maximum Performance Mode

Hyper-Threading Technology (SMT): Enabled

NPS4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Base Compiler Invocation

C benchmarks:

/opt/OMPI/O402\_I20\_H47\_R81/bin/mpicc

C++ benchmarks:

126.lammps: /opt/OMPI/O402\_I20\_H47\_R81/bin/mpicxx

Fortran benchmarks:

/opt/OMPI/O402\_I20\_H47\_R81/bin/mpif90

Benchmarks using both Fortran and C:

/opt/OMPI/O402\_I20\_H47\_R81/bin/mpicc

/opt/OMPI/O402\_I20\_H47\_R81/bin/mpif90

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

## Base Optimization Flags

C benchmarks:

-O3 -march=core-avx2 -no-prec-div -ipo

C++ benchmarks:

126.lammps: -O3 -march=core-avx2 -no-prec-div -ipo

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR665  
(AMD EPYC 7H12, 2.6 GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 33.1

**MPI2007 license:** 28

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Jan-2020

**Hardware Availability:** Jun-2020

**Software Availability:** Jun-2020

## Base Optimization Flags (Continued)

Fortran benchmarks:

-O3 -march=core-avx2 -no-prec-div -ipo

Benchmarks using both Fortran and C:

-O3 -march=core-avx2 -no-prec-div -ipo

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20200506.html](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20200506.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20200506.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20200506.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Wed May 6 11:57:06 2020 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 6 May 2020.