SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model C100

SPECfp95 = 6.20

SPECfp_base95 = 6.20

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Nov-95	Software Avail: Jun-95

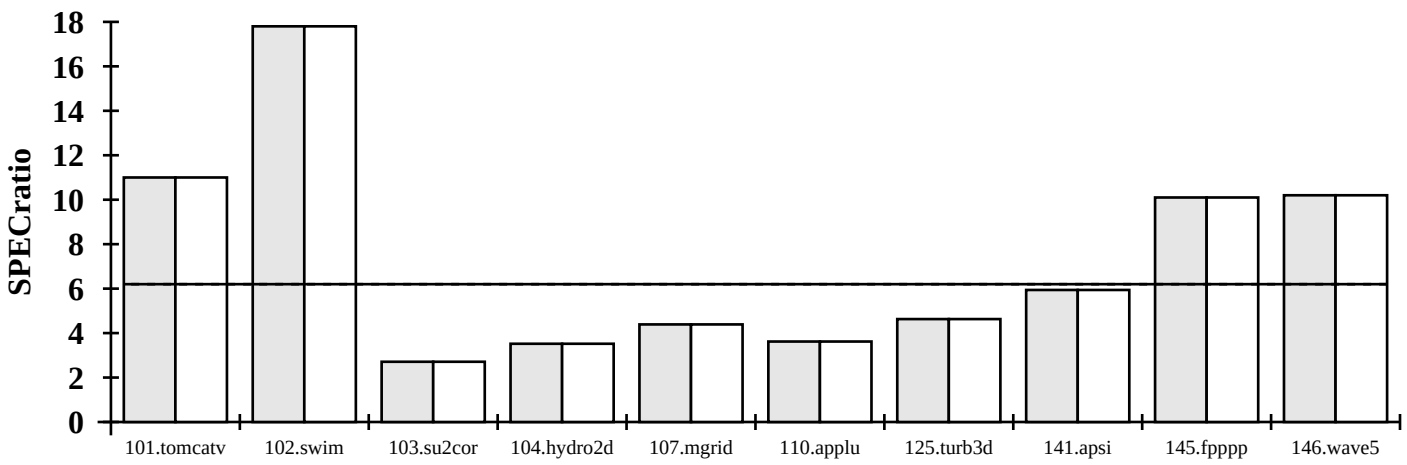

Hardware/Software Configuration for:
HP 9000 Model C100

Hardware

Model Name:	HP 9000 Model C100
CPU:	100 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	256KBI+256KBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	1 Fast/Wide SCSI-2 1.0 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.01
Compiler:	FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user
Kernel Extensions:	Increased: maxdsiz, maxssiz

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	335	11.0	335	11.0
102.swim	8600	484	17.8	484	17.8
103.su2cor	1400	517	2.71	517	2.71
104.hydro2d	2400	681	3.52	681	3.52
107.mgrid	2500	570	4.39	570	4.39
110.applu	2200	608	3.62	608	3.62
125.turb3d	4100	885	4.63	885	4.63
141.apsi	2100	354	5.94	354	5.94
145.fpppp	9600	953	10.1	953	10.1
146.wave5	3000	294	10.2	294	10.2
SPECfp_base95 (G. Mean)			6.20		
		SPECfp95 (G. Mean)			6.20

Notes/Tuning Information

```
Base Flags:
All:  +Oall +Onofastaccess
Linker Flags:  -Wl,-a,archive

Peak Flags:
Same as Base Flags unless otherwise noted.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org