SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Dell Computer Corporation
Dell Dimension XPS (Model 's', 166MHz, Intel MMX technology)

SPECint95 = 5.59

SPECint_base95 = 5.59

SPEC license # 13	Tested By: Intel	Test Date: Dec-96	Hardware Avail: Jan-97	Software Avail: Feb-96

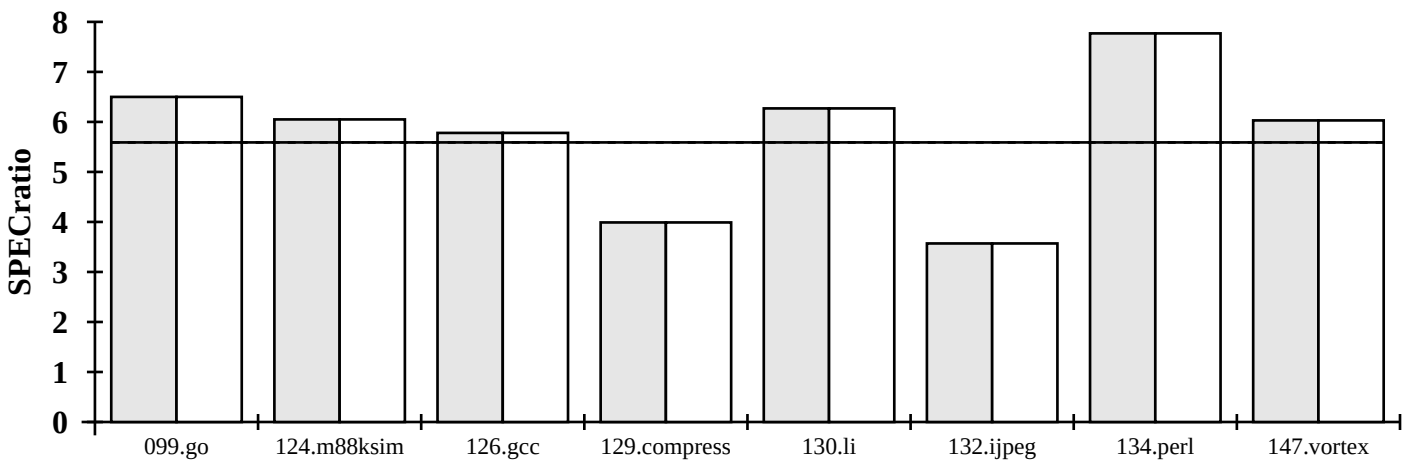

Hardware/Software Configuration for:
Dell Dimension XPS (Model 's', 166MHz, Intel MMX technology)

Hardware

Model Name:	Dell Dimension XPS (Model 's')
CPU:	166MHz Pentium processor w/ MMX technology
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD
Secondary Cache:	512KB
Other Cache:	None
Memory:	64MB SDRAM
Disk Subsystem:	IDE Quantum Fireball 1080 FBA
Other Hardware:	Intel 82430VX Chipset

Software

Operating System:	UnixWare 2.0, UnixWare SDK
Compiler:	Intel C Reference Compiler 2.3
File System:	UFS
System State:	Single User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	708	6.50	708	6.50
124.m88ksim	1900	314	6.05	314	6.05
126.gcc	1700	294	5.78	294	5.78
129.compress	1800	451	3.99	451	3.99
130.li	1900	303	6.27	303	6.27
132.ijpeg	2400	672	3.57	672	3.57
134.perl	1900	245	7.77	245	7.77
147.vortex	2700	448	6.03	448	6.03
SPECint_base95 (G. Mean)			5.59		
		SPECint95 (G. Mean)			5.59

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p5 -ipo -prof_gen -ircdb_dir /tmp/IRCDB -dn
Pass2: -tp p5 -ipo -prof_use -ircdb_dir /tmp/IRCDB -dn
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV  126: -lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --