SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Siemens Nixdorf Informationssysteme PRIMERGY-560

SPECint_rate95 = 151

SPECint_rate_base95 = 151

SPEC license # 22	Tested By: SNI, Augsburg / Germany	Test Date: Oct-96	Hardware Avail: Oct-96	Software Avail: Oct-96

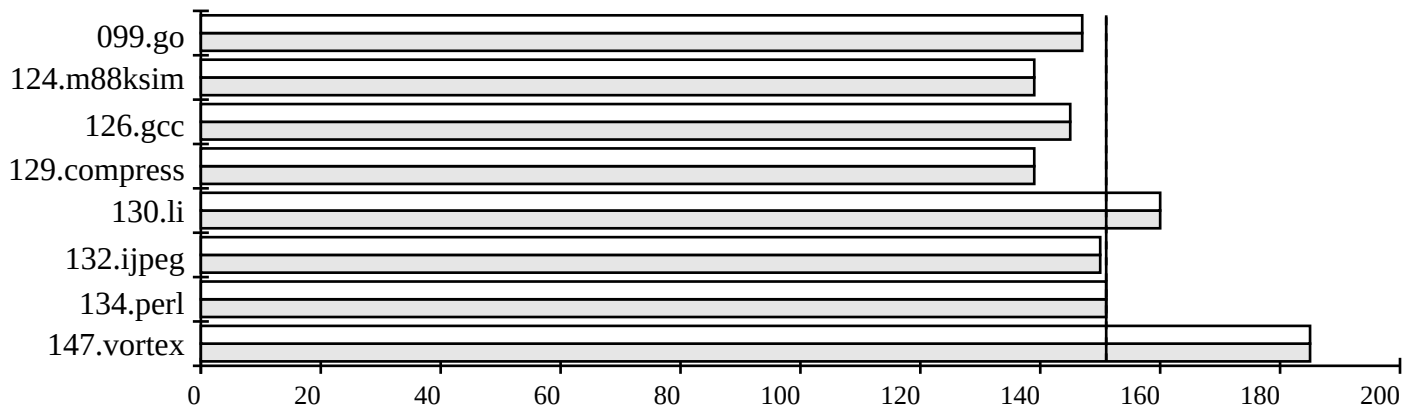

Hardware/Software Configuration for: PRIMERGY-560

Hardware

Model Name:	PRIMERGY-560
CPU:	200 MHz Pentium-Pro
FPU:	Integrated
Number of CPU(s):	2
Primary Cache:	8KBI+8KBD on chip
Secondary Cache:	512KB(I+D) on chip
Other Cache:	None
Memory:	256 MB
Disk Subsystem:	2 x 2 GB
Other Hardware:	AHA 2940

Software

Operating System:	Unixware 2.1
Compiler:	Intel Reference Compiler 2.3.2
File System:	VXFS
System State:	Single User

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	2	565	147	2	565	147
124.m88ksim	2	246	139	2	246	139
126.gcc	2	211	145	2	211	145
129.compress	2	232	139	2	232	139
130.li	2	214	160	2	214	160
132.ijpeg	2	288	150	2	288	150
134.perl	2	226	151	2	226	151
147.vortex	2	263	185	2	263	185
SPECint_rate_base95 (G. Mean)			151			
SPECint_rate95 (G. Mean)						151

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo -xi -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo -xi -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV  126: -lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --