SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Fujitsu teamserver G770i

SPECint_rate95	=	96.9
SPECint_rate_base95	=	96.9

SPEC license # 42	Tested By: Fujitsu	Test Date: Apr-97	Hardware Avail: Jun-97	Software Avail: Jun-96

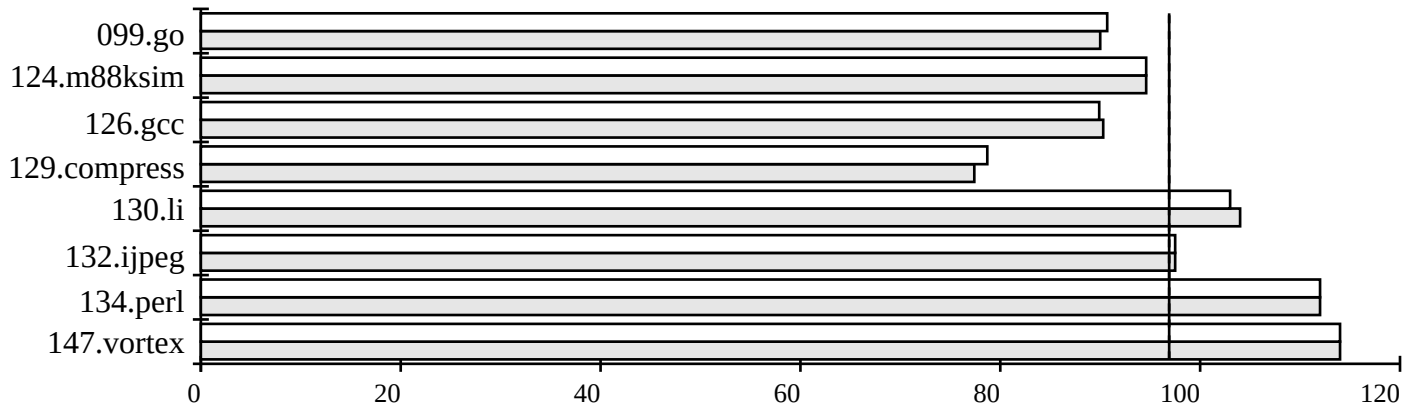

Hardware/Software Configuration for: teamserver G770i

Hardware

Model Name:	Fujitsu teamserver G770i
CPU:	Pentium II 266MHz
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD
Secondary Cache:	512KB(I+D)
Other Cache:	None
Memory:	128MB
Disk Subsystem:	2GB Fujitsu
Other Hardware:	None

Software

Operating System:	UnixWare 2.1.1
Compiler:	Intel C Reference Compiler V2.3.2
File System:	VXFS
System State:	Multi User

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	460	90.0	1	456	90.7
124.m88ksim	1	181	94.6	1	181	94.6
126.gcc	1	169	90.3	1	170	89.9
129.compress	1	209	77.4	1	206	78.7
130.li	1	164	104	1	166	103
132.ijpeg	1	222	97.5	1	222	97.5
134.perl	1	153	112	1	153	112
147.vortex	1	212	114	1	213	114
SPECint_rate_base95 (G. Mean)			96.9			
SPECint_rate95 (G. Mean)						96.9

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV
-lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --