SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Fujitsu teamserver G770i

SPECint95 = 10.8

SPECint_base95 = 10.7

SPEC license # 42	Tested By: Fujitsu	Test Date: Apr-97	Hardware Avail: Jun-97	Software Avail: Jun-96

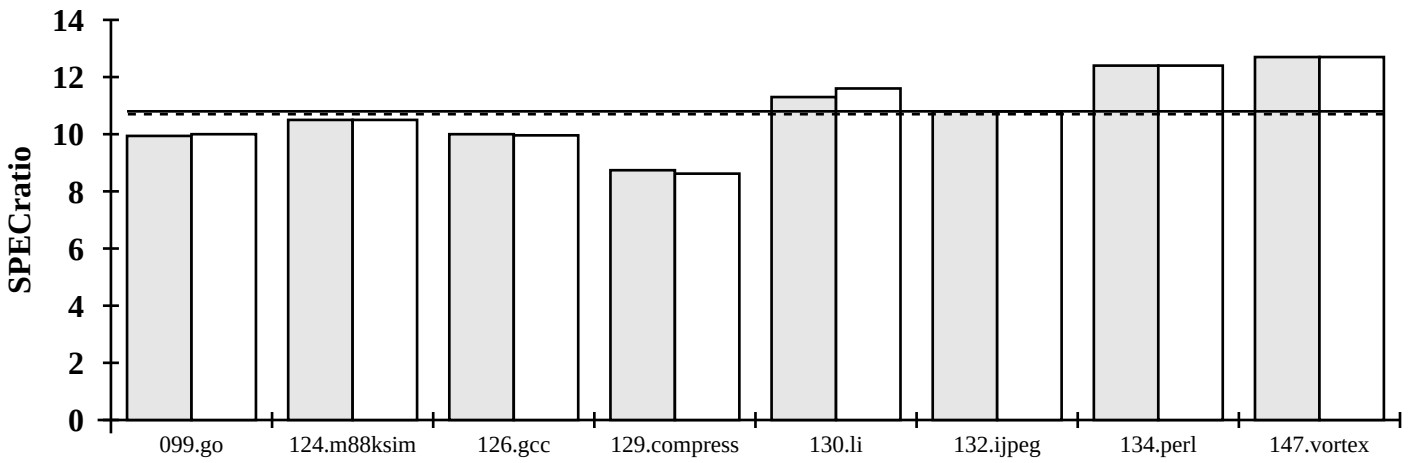

Hardware/Software Configuration for:
teamserver G770i

Hardware

Model Name:	Fujitsu teamserver G770i
CPU:	Pentium II 266MHz
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD
Secondary Cache:	512KB(I+D)
Other Cache:	None
Memory:	128MB
Disk Subsystem:	2GB Fujitsu
Other Hardware:	None

Software

Operating System:	UnixWare 2.1.1
Compiler:	Intel C Reference Compiler V2.3.2
File System:	VXFS
System State:	Multi User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	463	9.94	458	10.0
124.m88ksim	1900	181	10.5	181	10.5
126.gcc	1700	170	10.0	171	9.96
129.compress	1800	206	8.74	209	8.62
130.li	1900	168	11.3	164	11.6
132.ijpeg	2400	222	10.8	222	10.8
134.perl	1900	153	12.4	153	12.4
147.vortex	2700	213	12.7	213	12.7
SPECint_base95 (G. Mean)			10.7		
		SPECint95 (G. Mean)			10.8

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV
-lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --