SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Fujitsu teamserver C760i

SPECint_rate95 = 85.8

SPECint_rate_base95 = 85.8

SPEC license # 42	Tested By: Fujitsu	Test Date: Apr-97	Hardware Avail: Jun-97	Software Avail: Jun-96

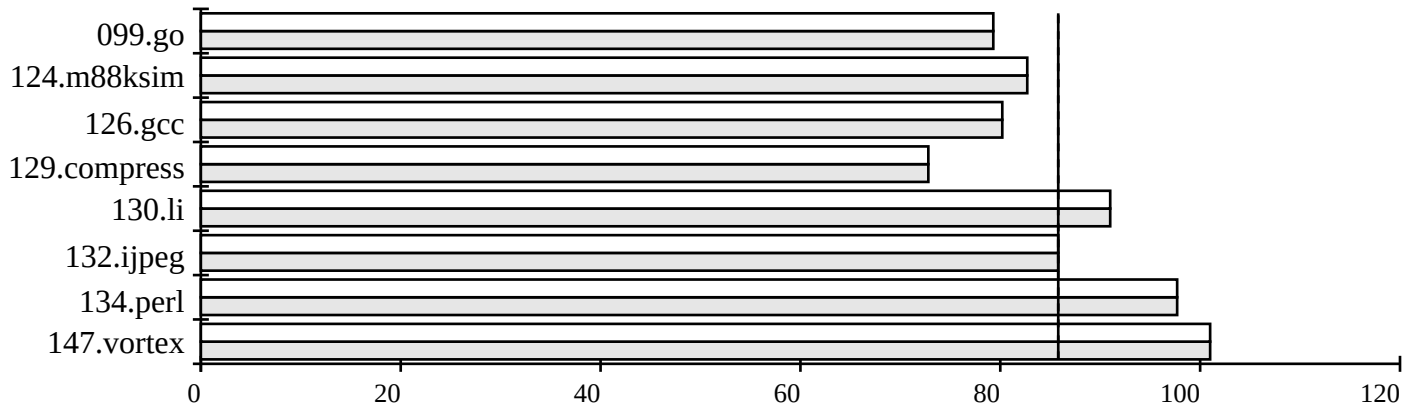

Hardware/Software Configuration for: teamserver C760i

Hardware

Model Name:	Fujitsu teamserver C760i
CPU:	Pentium II 233MHz
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD
Secondary Cache:	512KB(I+D)
Other Cache:	None
Memory:	128MB
Disk Subsystem:	2GB IBM
Other Hardware:	None

Software

Operating System:	UnixWare 2.1
Compiler:	Intel C Reference Compiler V2.3.2
File System:	VXFS
System State:	Multi User

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	522	79.3	1	522	79.3
124.m88ksim	1	207	82.7	1	207	82.7
126.gcc	1	191	80.2	1	191	80.2
129.compress	1	223	72.8	1	223	72.8
130.li	1	188	91.0	1	188	91.0
132.ijpeg	1	252	85.8	1	252	85.8
134.perl	1	175	97.7	1	175	97.7
147.vortex	1	241	101	1	241	101
SPECint_rate_base95 (G. Mean)			85.8			
SPECint_rate95 (G. Mean)						85.8

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV
-lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --