SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Fujitsu teamserver C760i

SPECint95 = 9.58

SPECint_base95 = 9.58

SPEC license # 42	Tested By: Fujitsu	Test Date: Apr-97	Hardware Avail: Jun-97	Software Avail: Jun-96

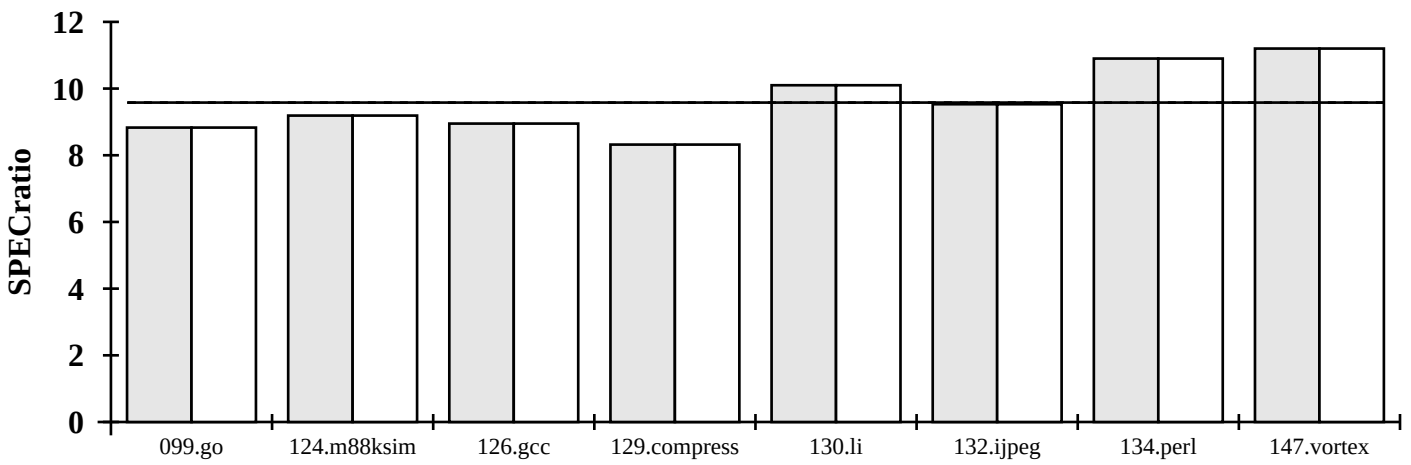

Hardware/Software Configuration for: teamserver C760i

Hardware

Model Name:	Fujitsu teamserver C760i
CPU:	Pentium II 233MHz
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD
Secondary Cache:	512KB(I+D)
Other Cache:	None
Memory:	128MB
Disk Subsystem:	2GB IBM
Other Hardware:	None

Software

Operating System:	UnixWare 2.1
Compiler:	Intel C Reference Compiler V2.3.2
File System:	VXFS
System State:	Multi User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	521	8.83	521	8.83
124.m88ksim	1900	207	9.19	207	9.19
126.gcc	1700	190	8.95	190	8.95
129.compress	1800	216	8.32	216	8.32
130.li	1900	188	10.1	188	10.1
132.ijpeg	2400	252	9.53	252	9.53
134.perl	1900	175	10.9	175	10.9
147.vortex	2700	241	11.2	241	11.2
SPECint_base95 (G. Mean)			9.58		
		SPECint95 (G. Mean)			9.58

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DSYSV -DLEHOST 130, 134, 147: -lm  132: -DSYSV
-lm -lc -L/usr/ucblib -lucb -lmalloc
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --