SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Siemens Nixdorf Informationssysteme RM300 Model E50

SPECint_rate95 = 194

SPECint_rate_base95 = 182

SPEC license # 22 | Tested By: SNI, Paderborn / Germany | Test Date: Jan-98 | Hardware Avail: Mar-98 | Software Avail: Mar-98

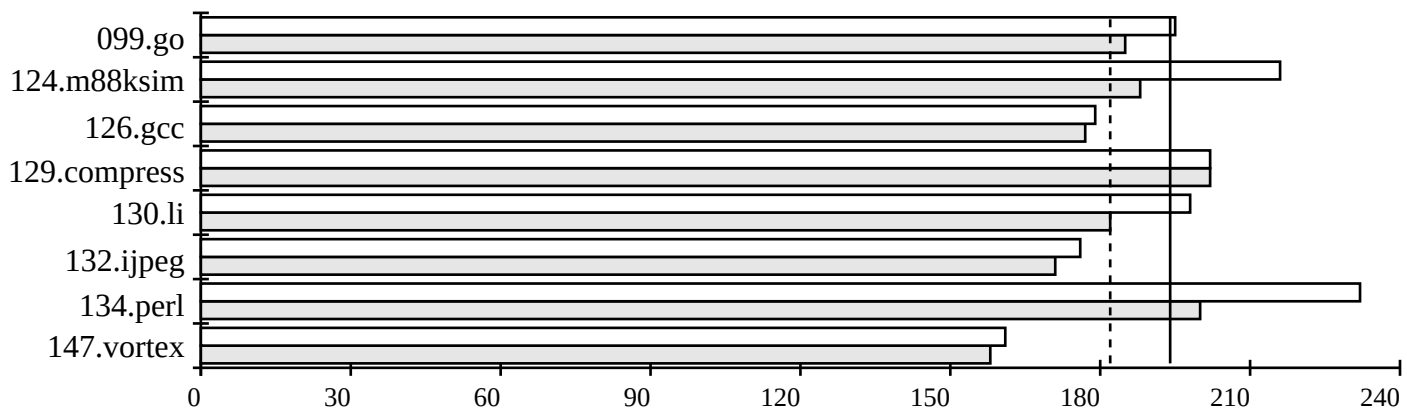

Hardware/Software Configuration for:
RM300 Model E50

Hardware

Model Name:	RM300-E50
CPU:	200 MHz R10000
FPU:	Integrated
Number of CPU(s):	2
Primary Cache:	32KBI+32KBD on chip
Secondary Cache:	2MB(I+D) off chip per CPU
Other Cache:	None
Memory:	2048MB
Disk Subsystem:	3 x 4GB (striped)
Other Hardware:	None

Software

Operating System:	Reliant UNIX 5.44 B 00 (MP)
Compiler:	pyrC 6.0A00
File System:	VxFS, -o nolog
System State:	Multi user, no extra processes

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	2	447	185	2	425	195
124.m88ksim	2	182	188	2	158	216
126.gcc	2	173	177	2	171	179
129.compress	2	160	202	2	160	202
130.li	2	188	182	2	173	198
132.ijpeg	2	253	171	2	245	176
134.perl	2	171	200	2	148	232
147.vortex	2	308	158	2	302	161
SPECint_rate_base95 (G. Mean)			182			
			SPECint_rate95 (G. Mean)			194

Notes/Tuning Information

```
Baseline:
PASS1 = -qfeedback; PASS2 = [empty]; OPTIMIZE = -WM,-Omips4 -WM,-G44 -dn
Peak:
099.go: -WM,-G1799 -Wo,-loopunroll,8 -Wo,-unrolllimit,2000 -Wg,-inline_limit,200
124.m88ksim: -WM,-G4000 -KOlimit:3500 -Wg,-inline_limit,1000  -Wo,-splitedges,0 -WM,-pre_opt
-Wo,-loopunroll,32,-unrolllimit,350 -Wb,-br_likely_cntl,60,200 -WG,-space_time:0.5
126.gcc: -WM,-G44 -WG,-boc,0.38,-only_clone_recursion,-recursion_depth,1,-clone_expansion,1.1 -Wb,-prefetch,512,0 -Wo,-recursive_calls
129.compress: -WM,-G44 -Wb,-no_self_copy
130.li: -WM,-G4000 -Wo,-unrolllimit,1000 -WG,-boc,0.35,-inline_limit,1500,-recursion_depth,3,-recursion_limit,400
-WG,-clone_expansion,1.25,-only_clone_recursion -Wg,-dont_prune_zero_edges
132.ijpeg: -WM,-G44 -Wo,-no_const_in_reg -Wo,-unrolllimit:800 -WG,-space_time:3.4 -Wb,-prefetch,100,0
134.perl: -WM,-G32 -KOlimit:5000 -Wo,-unrolllimit,500 -Wo,-recursive_calls -WG,-boc,0.25 -Wg,-recursion_limit,4700
-Wn,-recursion_limit,1000000,-recursion_depth,1,-only_clone_recursion -Wc,-xjp_mh_opt,1,30 -WM,-no_positioning
147.vortex: -WM,-G46 -Wo,-unrolllimit,1000 -Wg,-boc,0.91,-inline_limit,300

1-pass feedback for 099, 124, 129, 132, 147:
PASS1 = -qfeedback -WM,-Omips4 -dn
PASS2 = -WM,-Omips4 -dn, plus: see above

2-pass feedback for 126, 130, 134:
PASS1 = -qfeedback -WM,-Omips4 -dn
PASS2 = -qfeedback2 -WM,-Omips4 -dn, plus: see above
fdo_run1 = %command%
fdo_run2 = %command%
fdo_post2 = ksh -c "cd %benchtop%/src; 'grep '/usr/opt/pyrC/bin/cc' %benchtop%/src/make2.out | tail -1 | sed -e 's/-qfeedback2/-WM,-use_fb2/''"
i.e. use all flags of PASS2 except that "-qfeedback2" is replaced by "-WM,-use_fb2"

For Portability: 134.perl: -DI_TIME -DI_SYS_TIME
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --