SPEC CINT95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Intel Corporation
Intel MU440EX motherboard (333MHz, Unixware 2.0)

SPECint95 = 12.3

SPECint_base95 = 12.3

SPEC license # 14 | Tested By: Intel | Test Date: Aug-98 | Hardware Avail: Aug-98 | Software Avail: Feb-96

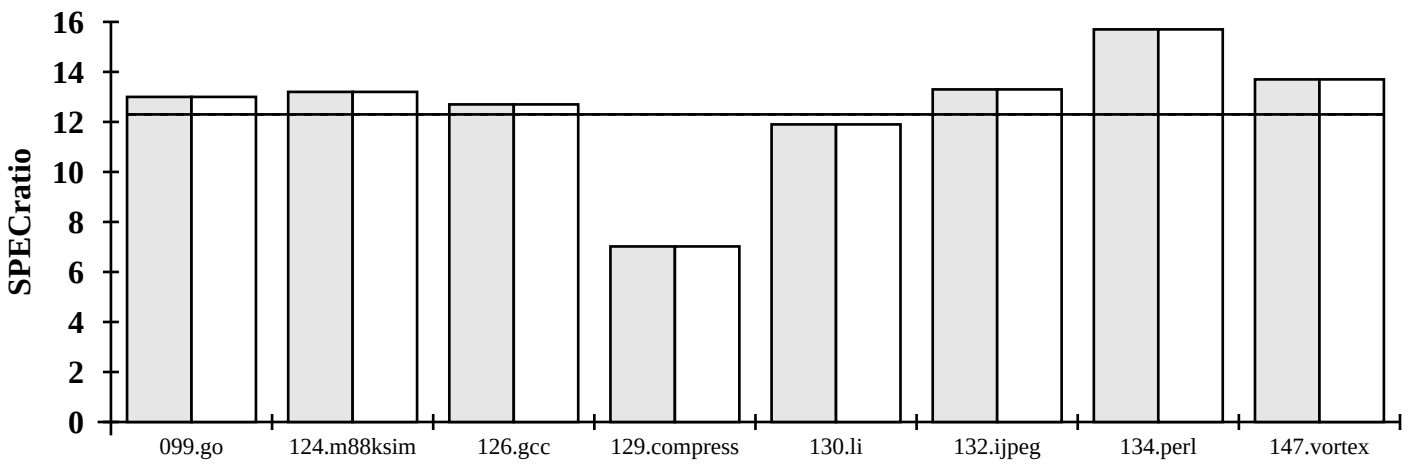

Hardware/Software Configuration for:
Intel MU440EX motherboard (333MHz, Unixware 2.0)

Hardware

Model Name:	Intel MU440EX motherboard
CPU:	333MHz Celeron processor
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	16KBI+16KBD
Secondary Cache:	128KB(I+D)
Other Cache:	None
Memory:	64MB SDRAM
Disk Subsystem:	Quantum Fireball EIDE
Other Hardware:	None

Software

Operating System:	UnixWare 2.0, UnixWare SDK
Compiler:	Intel C Compiler V2.3
File System:	UFS
System State:	Single User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
099.go	4600	353	13.0	353	13.0
124.m88ksim	1900	144	13.2	144	13.2
126.gcc	1700	134	12.7	134	12.7
129.compress	1800	256	7.02	256	7.02
130.li	1900	159	11.9	159	11.9
132.ijpeg	2400	180	13.3	180	13.3
134.perl	1900	121	15.7	121	15.7
147.vortex	2700	197	13.7	197	13.7
SPECint_base95 (G. Mean)			12.3		
		SPECint95 (G. Mean)			12.3

Notes/Tuning Information

```
Base and peak flags are the same and use Feedback Directed Optimization
Pass1: -tp p6 -ipo  -prof_gen -ircdb_dir /proj/tmp/IRCDB
Pass2: -tp p6 -ipo  -prof_use -ircdb_dir /proj/tmp/IRCDB
-ircdb_dir is a location flag and not an optimization flag
Portability: 124: -DLEHOST 130, 134, 147: -lm  126: -lm -lc -L/usr/ucblib -lucb -lmalloc
Tested system can be used with: Shin-G ATX Computer Case; Sparkle, Inc. ATX Power Supply
Product description located as of 8/98:
http://developer.intel.com/design/motherbd/mu/mu_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See:
http://www.intel.com/intel/contact/ for further information
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@specbench.org
http://www.specbench.org/

-- Prepared By: --