SPEC SFS 1 Summary (Side 1 of 2) 097.LADDIS

Auspex Systems, Inc.

NS 7000 NetServer 250

Server Hardware

CPU, Memory, & Power

Model No.	NS 7000 Model 250
Network Processor (NP	66MHz dual CPU HyperSPARC
# of NPs	1
Host Processor	n/a for NFS
Memory	256MB
Other Cache	1 2MB NVRAM Write Accelerator
UPS	None
Other hardware	None

Server Software

OS Version	Release 1.8
Other software	None
File system	Auspex LFS (BSD FFS)

Load Generators (LGs)

Number of Load Generators:	4
Processes Per Load Generator:	6
Biod_Max_Reads:	2
Biod_Max_Writes:	2

Disk Subsystem & Filesystems

(Full Configuration on Side 2)

Num Disk Controllers	1 Storage Processors (SP)
Num Disks	22
Num File Systems	4 (F1 through F4)

Network Subsystem

(Full Configuration On Side 2)

Num Net Controllers	1 Network Processors (NP)
Num Networks	1 (N1)
Type Network	FDDI

Server Tuning

(Also see Notes/Tuning below)

Buffer Cache Size	180MB (Data Cache)
Num NFS Daemons	48
Fileset Size	11.1GB

NFS Throughput SPECnfs_A93 Ops/Sec	Avg. Response Time (NFS) Milliseconds
39	2.8
241	3.6
444	3.9
645	4.3
847	4.9
1047	5.1
1250	5.5
1453	7.0
1658	7.5
1863	10.0
2054	13.6

Hardware Availability: Nov-95 **Software Availability:** Nov-95

License #: 29 **Tested:** Oct-95 **By:** Auspex **Of:** Santa Clara, CA

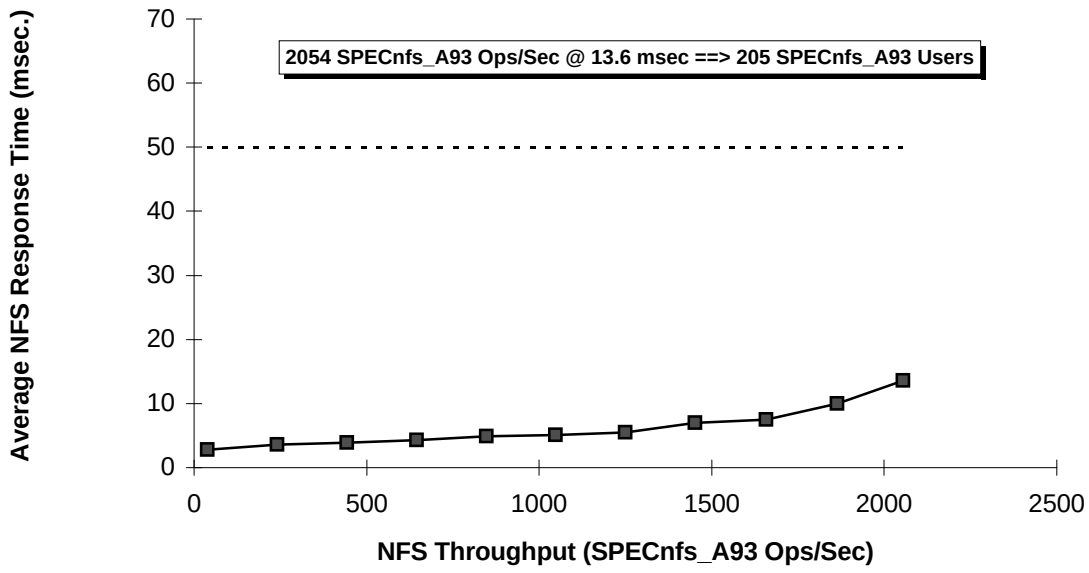

Notes/Summary Of Tuning Parameters: (Continued on Side 2 of 2)

The adb tool was used to enable UDP checksumming on all load generators:

```
adb -w /vmunix /dev/kmem
udp_cksum?W1
udp_cksum/W1
```

The Auspex NetServer responds to checksummed requests with checksummed replies, by default.

The LADDIS Prime Client was the Server's Host Processor (no router was needed).

All load generators used the same LADDIS mount points list with the same /etc/fstab entries.

Network Processors: NP0; Storage Processors: SP0

SPEC SFS 1 Summary (Side 2 of 2) 097.LADDIS

Auspex Systems, Inc.
NS 7000 NetServer 250

Detailed Server Description

Network Subsystem

Network Processor (Model NP-III):
- Dual HyperSPARC (66MHz), 256MB
- One processor does protocol processing, and the other processor does filesystem processing
- 4MB Static RAM
- 1 MLT3 FDDI Adapter

Number of NP-III processors: 1

Disk Subsystem & Filesystems

Storage Processor (Model SP-V):
- M68030 (50MHz), 1MB local memory
- 2MB NVRAM Write Accelerator
- 5 SCSI Channels
- 20 data disks (4.29GB Seagate "Barracuda") configured
- 4 Virtual Partitions: Each Virtual Partition stripes across 5 disks (unit=128KB) on 5 different channels
- 4 Filesystems (1 Virtual Partition each)

Number of SP-V processors: 1

SP0: Disks: 2 - 21; Filesystems: 1, 2, 3, 4

SP0 also supported Disk0 (OS, Swap space) and Disk1 (LADDIS files).

Detailed Load Generator (LG) Description

Load Gen. Type	*Model*	*# of CPUs*	*RAM*	*OS*	*Compiler*
LG1	Sun SPARCstation 20 (Model 71)	1	64MB	SunOS 4.1.3	/bin/cc

Testbed Configuration

Load Gen. #	*Load Gen. Type*	*Network*	*Target File Systems*	*Notes*
1	LG1	N1	F1, F2, F3, F4, F1, F2	
2	LG1	N1	F3, F4, F1, F2, F3, F4	
3	LG1	N1	F1, F2, F3, F4, F1, F2	
4	LG1	N1	F3, F4, F1, F2, F3, F4	

Notes/Summary Of Tuning Parameters: (Continued from Side 1 of 2)

On all the load generators, udp_sendspace = 32768 and udp_recvspace = 32768.

On all the load generators, udp_sendspace = 32768 and udp_recvspace = 32768.