SPECweb96 Result

©Copyright 1996, Standards Performance Evaluation Corporation

Digital Equipment Corp.
Alphaserver 4000 5/466

SPECweb96= 1544

Test Date : Feb-97

Tested by : Digital Nashua

Hardware Avail:	Jan-97	OS Avail:	Jul-97	HTTP Software Avail:	Dec-96	SPEC license #:	2

Throughput ops/sec	Response msec
160	8.2
320	8.6
480	8.9
640	9.4
800	10.0
960	10.9
1120	11.9
1280	13.5
1440	16.5
1520	21.2
1544	31.0
1543	31.1

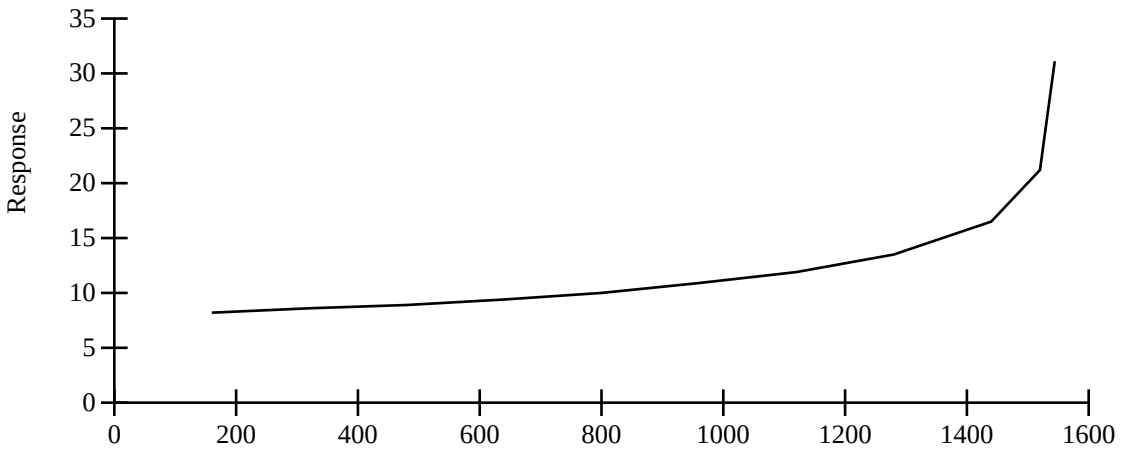

Hardware

Model Name:	Alphaserver 4000 5/466
Processor:	466Mhz 21164
# of Processors:	2
Primary Cache:	8KB(I)+8KB(D) on chip
Secondary Cache:	96KB
Other Cache:	4MB
Memory:	1GB
Disk Subsystem:	3 rz29B drives
Disk Controllers:	Integral FW SCSI
Other Hardware:	None

Software

Operating System:	Digital UNIX 4.0D-5 (Rev 669)
File System:	UFS
Other Software:	none

HTTP Software

Vendor:	Zeus
HTTP Software:	Zeus 1.1.7
# of "threads":	2
Server Cache:	Default
Log Mode:	common

Network

# of Controllers:	4
Network Controllers:	DEFPA-AA
# of Nets:	4
Type of Nets:	FDDI
Network Speed:	100Mbit
Time Wait (secs):	60 (Non RFC1122)

Load Generators

# of Load Generators:	4
# of Processes Each:	12
Model:	AlphaServer 4100 5/400
Processor:	400Mhz
# of CPUs:	4
Memory:	256MB
OS:	Digital UNIX X4.0D-4 (Rev. 667)
Compiler:	DEC C V5.2-023

Benchmark Configuration

Max Requested Load:	1600
Max Fileset Size (MB):	873

Notes/Tuning Information

```
Zeus: -b 1048576 -t 10000 -q
Webserver sysconfigtab tuning:
proc: max-proc-per-user=1024, maxusers=2048,max-threads-per-user=2048
socket: sominconn=32765, somaxconn=327675
inet: tcbhashsize=16384
vm: private-text= 1, vm-mapentries=20000, vm-vpagemax=131072
vm-maxvas = 0x40000000000
Load Generator sysconfigtab tuning:
proc: max-proc-per-user=1024,maxusers=1024
socket: sominconn=32765,somaxconn=32765   inet: tcbhashsize=16384
```

For More Information contact

SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110

(703) 331-0180
info@specbench.org
http://www.specbench.org/