CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

TYAN Thunder K8SD Pro (S2882-D), AMD Opteron(TM) 285

SPECfp_rate2000 = 77.0

SPECfp_rate_base2000 = 67.8

SPEC license #: 49 | Tested by: AMD, Austin, Texas | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Jan-2006

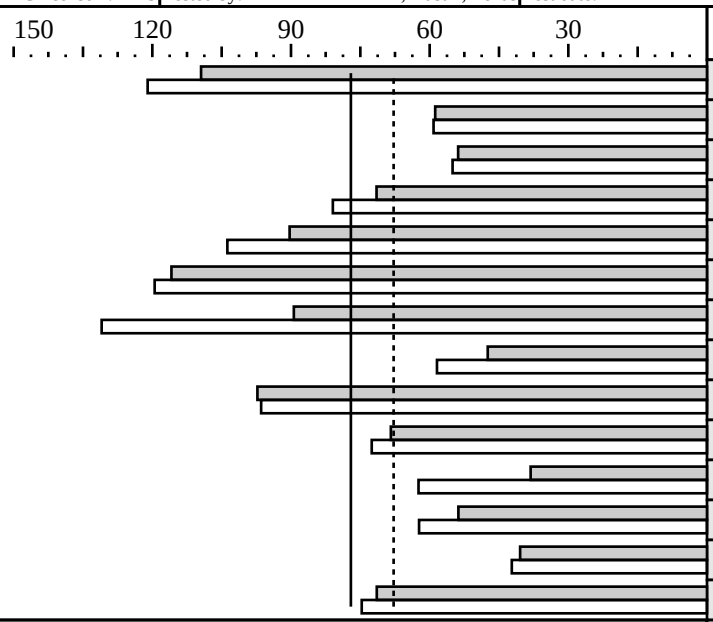

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	67.8	109	4	61.3	121
171.swim	4	245	58.8	4	243	59.2
172.mgrid	4	155	53.8	4	152	55.0
173.applu	4	136	71.5	4	120	80.9
177.mesa	4	71.9	90.3	4	62.6	104
178.galgel	4	116	116	4	113	119
179.art	4	135	89.4	4	92.1	131
183.equake	4	127	47.4	4	103	58.4
187.facerec	4	90.6	97.3	4	91.4	96.5
188.ammp	4	149	68.4	4	141	72.5
189.lucas	4	243	38.2	4	149	62.4
191.fma3d	4	181	53.8	4	156	62.3
200.sixtrack	4	126	40.4	4	121	42.2
301.apsi	4	169	71.4	4	162	74.7

Hardware

CPU:	AMD Opteron(TM) 285
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR400 CL2 ECC Reg
Disk Subsystem:	SATA, 250 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 SP3 (64-bit)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3
File System:	Linux/ext3
System State:	Multi-user, runlevel 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
  +ACML  means -L<acml2.7.0-install-dir>/pathscale64/lib -lacml,
         which causes linking with AMD Core Math Library V2.7.0

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000
                -INLINE:aggressive=on
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
              -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
              -WOPT:mem_opnds=on:aggstr=0
173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
              -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +ACML +FDO
               RM_SOURCES=lapak.f90
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -LNO:fusion=2
              -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

Corsair CMX512RE-3200LL (XMS3200REv2.1) memory used in Dual Channel configuration.
CMOS cleared, default BIOS settings used.
BIOS rev 3.05
The tested system can be assembled using a standard ATX case and an Antec True 550
watt EPS12V Power Supply.
```