CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Gigabyte GA-7DX Motherboard, AMD Athlon (TM) XP 1700+

SPECint2000 = 629

SPECint_base2000 = 605

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Sep-2001 | Hardware Avail: Oct-2001 | Software Avail: Jul-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	194	723	191	734
175.vpr	1400	367	381	342	409
176.gcc	1100	271	406	225	488
181.mcf	1800	633	284	631	285
186.crafty	1000	116	864	116	865
197.parser	1800	330	545	330	546
252.eon	1300	110	1181	99.3	1309
253.perlbmk	1800	200	899	201	897
254.gap	1100	160	689	160	689
255.vortex	1900	205	925	203	935
256.bzip2	1500	298	503	283	529
300.twolf	3000	634	473	623	481

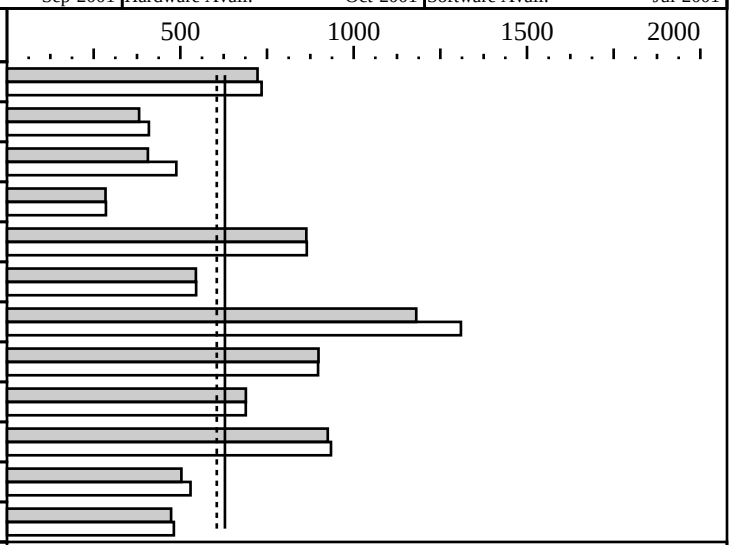

Hardware

CPU:	AMD Athlon (TM) XP 1700+
CPU MHz:	1466
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x128MB PC2400 DDR SDRAM CL2
Disk Subsystem:	Seagate ST320420A
Other Hardware:	None

Software

Operating System:	Windows 2000
Compiler:	Intel C/C++ 5.0.1 build 010525Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
176.gcc:   -Dalloca=_alloca /F10000000
186.crafty:   -DNT_i386
253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap:    -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -QxK -Qipo +FDO shlW32M.lib
Baseline C++: -QxK -Qipo -GX -GR
Peak tuning:
164.gzip:     -O3 -QxK -Qwp_ipo -Oi- +FDO
175.vpr:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
176.gcc:      -O3 -QxK -Qwp_ipo -Oi- +FDO shlW32M.lib
181.mcf:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
186.crafty:   -O3 -QxK -Qwp_ipo -Oa +FDO shlW32M.lib
197.parser:   -O3 -Qxi -QaxK -Qwp_ipo +FDO
252.eon:      -O3 -QxiM -Qwp_ipo +FDO
253.perlbmk:  -O3 -QxK -Qipo +FDO shlW32M.lib
254.gap:      -O3 -QxK -Qipo -Oi- +FDO shlW32M.lib
255.vortex:   -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 256.bzip2:    -O3 -QxK -Oa -Qwp_ipo
 300.twolf:    -O3 -QxK -Qipo -Oa +FDO shlW32M.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using an ATX case such as the Antec KS-282,
a 300W power supply such as the Sparkle FSP300-60GT, and a PCI or AGP video card.
The System bus and memory bus run at 266MHz
```