CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K7 Motherboard, AMD Athlon (TM) MP 1800+

SPECint2000 = 609

SPECint_base2000 = 587

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Sep-2001 | Hardware Avail: Oct-2001 | Software Avail: Jul-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	194	723	192	730
175.vpr	1400	401	349	372	376
176.gcc	1100	279	395	236	467
181.mcf	1800	762	236	752	239
186.crafty	1000	113	889	112	890
197.parser	1800	337	534	336	535
252.eon	1300	106	1227	95.8	1358
253.perlbmk	1800	196	917	196	917
254.gap	1100	160	688	160	688
255.vortex	1900	205	927	203	935
256.bzip2	1500	324	463	312	480
300.twolf	3000	662	453	652	460

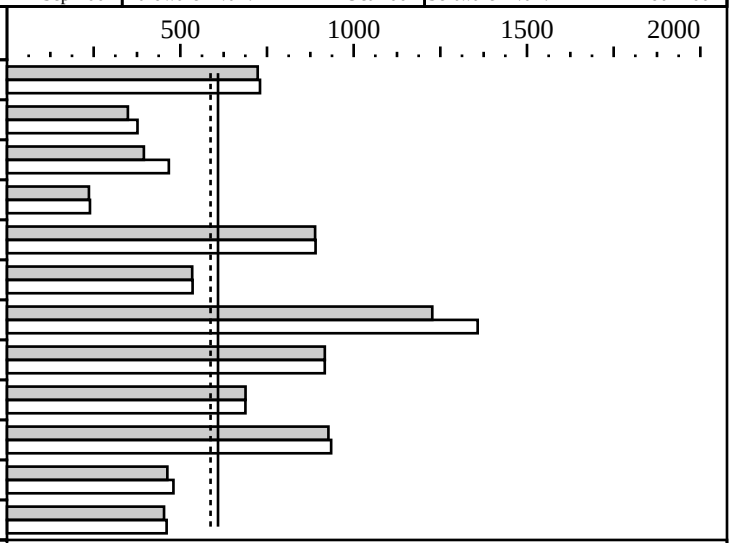

Hardware

CPU:	AMD Athlon (TM) MP 1800+
CPU MHz:	1533
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256MB PC2100 DDR SDRAM CL2 Registered
Disk Subsystem:	Seagate ST330620A
Other Hardware:	None

Software

Operating System:	Windows 2000 SP1
Compiler:	Intel C/C++ 5.0.1 build 010525Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
176.gcc:   -Dalloca=_alloca /F10000000
186.crafty:   -DNT_i386
253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap:    -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -QxK -Qipo +FDO shlW32M.lib
Baseline C++: -QxK -Qipo -GX -GR
Peak tuning:
164.gzip:     -O3 -QxK -Qwp_ipo -Oi- +FDO
175.vpr:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
176.gcc:      -O3 -QxK -Qwp_ipo -Oi- +FDO shlW32M.lib
181.mcf:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
186.crafty:   -O3 -QxK -Qwp_ipo -Oa +FDO shlW32M.lib
197.parser:   -O3 -Qxi -QaxK -Qwp_ipo +FDO
252.eon:      -O3 -QxiM -Qwp_ipo +FDO
253.perlbmk:  -O3 -QxK -Qipo +FDO shlW32M.lib
254.gap:      -O3 -QxK -Qipo -Oi- +FDO shlW32M.lib
255.vortex:   -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 256.bzip2:    -O3 -QxK -Oa -Qwp_ipo
 300.twolf:    -O3 -QxK -Qipo -Oa +FDO shlW32M.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using a case such as the Chenming 601 AE-F-O,
a 460W power supply such as the Delta Electronics DPS465 AB A
The System bus runs at 266MHz
```