CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

TYAN S2865 K8E Tomcat, AMD Opteron (TM) 175

SPECint_rate2000 = 33.9

SPECint_rate_base2000 = 32.5

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Jul-2005 | Hardware Avail: Sep-2005 | Software Avail: Mar-2005

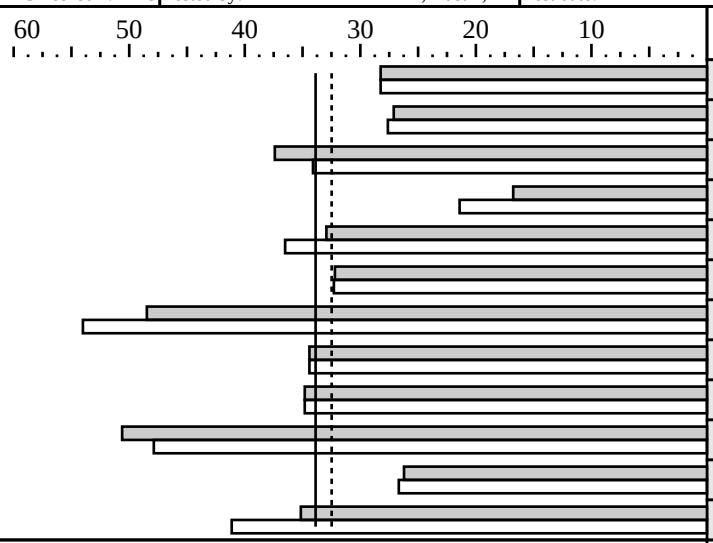

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	115	28.2	2	115	28.2
175.vpr	2	120	27.1	2	118	27.6
176.gcc	2	68.2	37.4	2	74.8	34.1
181.mcf	2	249	16.8	2	195	21.4
186.crafty	2	70.4	32.9	2	63.5	36.5
197.parser	2	130	32.2	2	129	32.3
252.eon	2	62.2	48.5	2	55.8	54.0
253.perlbmk	2	121	34.4	2	121	34.4
254.gap	2	73.3	34.8	2	73.3	34.8
255.vortex	2	87.1	50.6	2	92.1	47.9
256.bzip2	2	133	26.2	2	130	26.7
300.twolf	2	198	35.1	2	169	41.1

Hardware

CPU:	AMD Opteron (TM) 175 (939-pin)
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD/core
Secondary Cache:	1024KB(I+D)/core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512 MB DDR400 CL2.0
Disk Subsystem:	IDE, Western Digital WD2500JB, 7200 rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003 Enterprise Edition SP1
Compiler:	Intel C++ 8.0 build 20040714Z Microsoft Visual Studio .NET 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
shlW32M7.lib is the SmartHeap library V7.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
  176.gcc:      -Dalloca=_alloca /F10000000
  186.crafty:   -DNT_i386
  253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -fast -arch:SSE2 -Oi- +FDO
Baseline C++: -fast -arch:SSE2 -GX -GR
Peak Tuning:
164.gzip:     basepeak=yes
175.vpr:      -fast -arch:SSE2 +FDO
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
176.gcc:      -fast -arch:SSE2 +FDO -Oi- -Qunroll3
181.mcf:      -fast -QaxN      +FDO
186.crafty:   -fast -arch:SSE2 +FDO
197.parser:         -arch:SSE2 +FDO -Oi- -Qipo
252.eon:      -fast -arch:SSE2 +FDO -Qansi_alias
             -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
253.perlbmk:  basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 254.gap:      basepeak=yes
 255.vortex:   -fast -arch:SSE  +FDO -Oi- shlW32M7.lib
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 256.bzip2:    -fast                        -Qunroll2
 300.twolf:    -fast -arch:SSE2 +FDO        -Qunroll3 shlW32M7.lib -Qansi_alias
The start /b /wait /affinity command is used to bind CPU(s) to processes.
The tested system can be assembled using a standard ATX footprint, an Antec True 550
Watt EPS12V power supply, and a PCI or PCIe graphics card.
All memory slots were populated with Corsair CMX512-3200XL.
Memory timings manually set in BIOS: CAS=2, TRCD=2, TRAS=5, TRP=2
BIOS V2.00b
```