CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S4, Intel Pentium 4 631 processor, 3.0 GHz

SPECint_rate2000 = 19.1

SPECint_rate_base2000 = 19.1

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Apr-2006 | Hardware Avail: May-2006 | Software Avail: Oct-2005

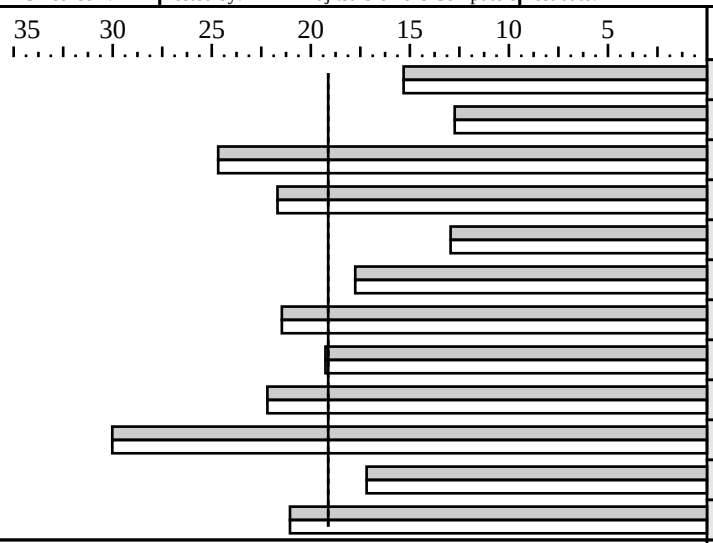

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	212	15.3	2	212	15.3
175.vpr	2	255	12.7	2	255	12.7
176.gcc	2	103	24.7	2	103	24.7
181.mcf	2	193	21.7	2	193	21.7
186.crafty	2	179	12.9	2	179	12.9
197.parser	2	235	17.8	2	235	17.8
252.eon	2	141	21.5	2	141	21.5
253.perlbmk	2	217	19.3	2	217	19.3
254.gap	2	115	22.2	2	115	22.2
255.vortex	2	147	30.0	2	147	30.0
256.bzip2	2	203	17.2	2	203	17.2
300.twolf	2	331	21.1	2	331	21.1

Hardware

CPU:	Intel Pentium 4 631 processor (3.0 GHz, 2MB L2, 800MHz system bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048 MB DDRII-RAM PC2-4200E
Disk Subsystem:	Fujitsu MAS3735NC (SCSI, 15krpm, 73GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C++ Compiler 9.0 Build 20051020Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 800 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries