CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7140M, 3.40 GHz

SPECint_rate2000 = 162

SPECint_rate_base2000 = 162

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jul-2006 | Hardware Avail: Aug-2006 | Software Avail: May-2006

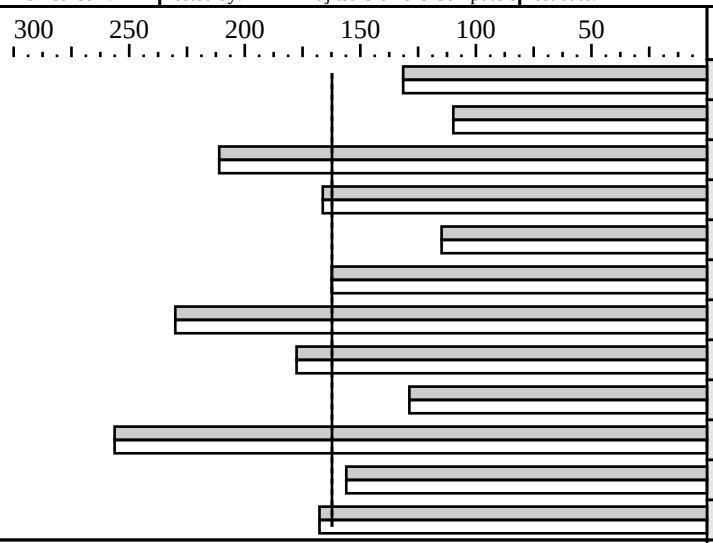

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	198	131	16	198	131
175.vpr	16	237	110	16	237	110
176.gcc	16	96.7	211	16	96.7	211
181.mcf	16	201	166	16	201	166
186.crafty	16	162	115	16	162	115
197.parser	16	206	162	16	206	162
252.eon	16	105	230	16	105	230
253.perlbmk	16	188	178	16	188	178
254.gap	16	159	129	16	159	129
255.vortex	16	138	256	16	138	256
256.bzip2	16	178	156	16	178	156
300.twolf	16	332	168	16	332	168

Hardware

CPU:	Intel Xeon processor 7140M (3.40 GHz, 2x1MB L2, 16MB L3, 800 MHz system bus)
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip, per core
Secondary Cache:	1024KB(I+D) on chip, per core
L3 Cache:	16MB on chip, per chip
Other Cache:	N/A
Memory:	16x1GB DDRII-RAM PC2-3200R (CAS 3-3-3)
Disk Subsystem:	Fujitsu MAS3367NC (SCSI, 15krpm, 36GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 800 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

This result was measured on the PRIMERGY TX600 S3. The PRIMERGY TX600 S3 and the PRIMERGY RX600 S3 are electronically equivalent.

BIOS Configuration:
Hardware Prefetch = Enable, Adjacent Sector Prefetch = Enable

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries