CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Epox 8KHA+ Motherboard, AMD Athlon (TM) XP 2400+

SPECint2000 = 808

SPECint_base2000 = 782

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Aug-2002 | Hardware Avail: Aug-2002 | Software Avail: Feb-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	143	980	141	993
175.vpr	1400	305	460	283	495
176.gcc	1100	207	531	178	617
181.mcf	1800	521	345	521	345
186.crafty	1000	86.0	1163	86.0	1162
197.parser	1800	253	710	254	707
252.eon	1300	80.6	1612	73.1	1778
253.perlbmk	1800	151	1194	151	1194
254.gap	1100	122	899	122	901
255.vortex	1900	153	1244	152	1252
256.bzip2	1500	246	610	235	638
300.twolf	3000	515	583	507	591

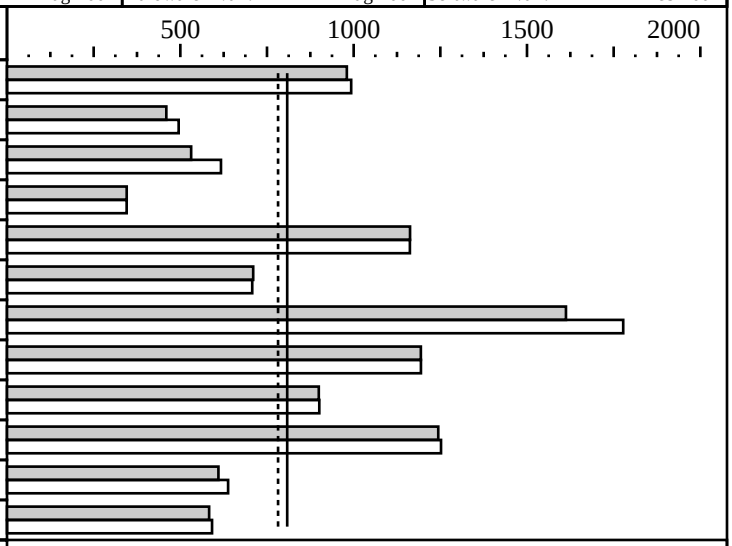

Hardware

CPU:	AMD Athlon (TM) XP 2400+
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x256MB PC2100 DDR SDRAM CL2
Disk Subsystem:	Seagate ST320414A
Other Hardware:	None

Software

Operating System:	Windows 2000 SP2
Compiler:	Intel C++ 5.0.1 build 020125Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
176.gcc:    -Dalloca=_alloca /F10000000
186.crafty:   -DNT_i386
253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap:    -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -QxK -Qipo +FDO shlW32M.lib
Baseline C++: -QxK -Qipo -GX -GR
Peak tuning:
164.gzip:     -O3 -QxK -Qwp_ipo -Oi- -Oa +FDO
175.vpr:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
176.gcc:      -O3 -QxK -Qwp_ipo -Oi- +FDO shlW32M.lib
181.mcf:      -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
186.crafty:   -O3 -QxK -Qwp_ipo -Oa +FDO shlW32M.lib
197.parser:   -O3 -QxK -Qwp_ipo +FDO
252.eon:      -O3 -QxK -Qwp_ipo +FDO
253.perlbmk:  -O3 -QxK -Qipo +FDO shlW32M.lib
254.gap:      -O3 -QxK -Qipo -Oi- +FDO
255.vortex:   -O3 -QxK -Qwp_ipo +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 256.bzip2:    -O3 -QxK -Oa -Qwp_ipo
 300.twolf:    -O3 -QxK -Qipo -Oa +FDO shlW32M.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using an ATX case such as the Antec KS-282,
a 300W power supply such as the Sparkle FSP300-60GT, and a PCI or AGP video card.
The System bus runs at 266MHz
```