CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Asus A7M266-D Motherboard, AMD Athlon (TM) MP 2400+

SPECfp_rate2000 = 11.2

SPECfp_rate_base2000 = 10.5

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Nov-2002 | Hardware Avail: Dec-2002 | Software Avail: Feb-2002

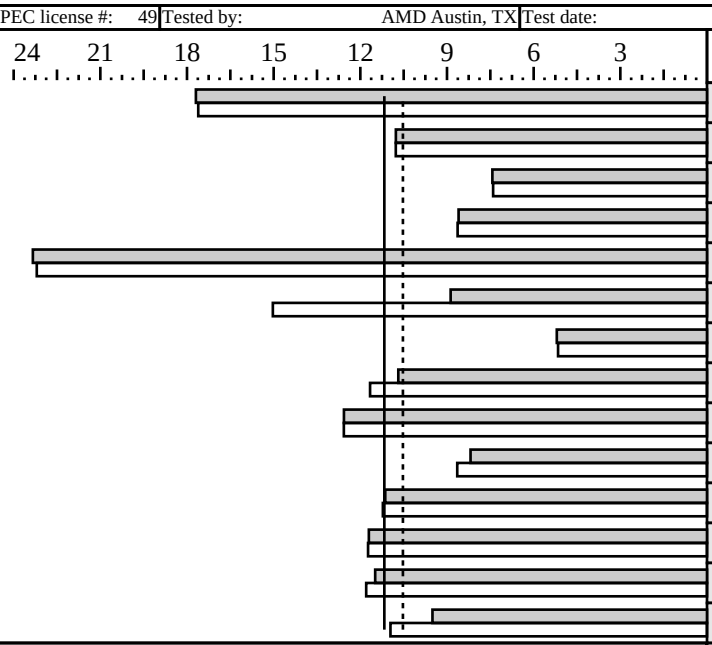

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	210	17.7	2	211	17.6
171.swim	2	668	10.8	2	668	10.8
172.mgrid	2	562	7.43	2	564	7.40
173.applu	2	567	8.60	2	564	8.63
177.mesa	2	139	23.3	2	140	23.2
178.galgel	2	758	8.87	2	448	15.0
179.art	2	1160	5.20	2	1170	5.16
183.equake	2	282	10.7	2	259	11.7
187.facerec	2	351	12.6	2	351	12.6
188.ammp	2	624	8.19	2	590	8.65
189.lucas	2	417	11.1	2	414	11.2
191.fma3d	2	416	11.7	2	415	11.7
200.sixtrack	2	222	11.5	2	216	11.8
301.apsi	2	635	9.50	2	551	11.0

Hardware

CPU:	AMD Athlon (TM) MP 2400+
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1, 2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x256MB PC2100 DDR SDRAM CL2
Disk Subsystem:	Seagate ST320414A
Other Hardware:	None

Software

Operating System:	Windows 2000 SP2
Compiler:	Intel C++ 5.0.1 build 020125Z Intel Fortran 5.0.1 build 020125Z and Compaq Visual Fortran 6.6 Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
icl and ifl are the Intel C++ and Fortran compilers
f90 is the Compaq Fortran compiler
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
Portability:
178.galgel: -FI -Fe$@ -link -stack:32000000
Baseline: C       icl -QxK -Qipo +FDO shlW32M.lib
Baseline: Fortran ifl -O3 -QxK -Qipo +FDO
Peak tuning:
168.wupwise:  ifl -O3 -QxK -Qwp_ipo +FDO
171.swim:     ifl -O3 -QxK -Qwp_ipo +FDO
172.mgrid:    ifl -O3 -QxK -Qwp_ipo +FDO
173.applu:    ifl -O3 -QxK -Qwp_ipo -Qscalar_rep- -Qauto +FDO
177.mesa:     icl -O3 -QxK -Qwp_ipo -Oa +FDO shlw32M.lib
178.galgel:   f90 -Optimize:5 -fast
179.art:      icl -O3 -QxK -QaxW -Qwp_ipo -Oa +FDO shlW32M.lib
183.equake:   icl -O3 -QxK -Qwp_ipo -Qrcd -Oa +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 187.facerec:  ifl -O3 -QxK -Qipo +FDO
 188.ammp:     icl -O3 -QxK -Qwp_ipo -Oa +FDO
 189.lucas:    ifl -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
 191.fma3d:    ifl -O3 -QxK -Qwp_ipo +FDO
 200.sixtrack: ifl -QxK -QaxW -Qwp_ipo -Qprefetch +FDO
 301.apsi:     f90 -Optimize:5 -fast
 Library ordering for 189.lucas (to include SmartHeap correctly with default libs):
 LIBS=libIEPCF90.lib libintrins.lib libF90.lib
 libqwind.lib libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using an ATX case such as the Antec KS-282,
a 400W power supply such as the Sparkle FSP400-60GN, and a PCI or AGP video card.
The System bus runs at 266MHz
```