CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro
PDSM4/E Motherboard

SPECint2000 = 1490

SPECint_base2000 = 1492

SPEC license #01176 | Tested by: Supermicro | Test date: Aug-2005 | Hardware Avail: Aug-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	131	1069	132	1057
175.vpr	1400	145	963	144	974
176.gcc	1100	61.5	1787	61.5	1787
181.mcf	1800	122	1477	122	1477
186.crafty	1000	84.3	1186	84.8	1179
197.parser	1800	142	1272	142	1272
252.eon	1300	64.8	2007	64.9	2003
253.perlbmk	1800	93.1	1934	93.3	1929
254.gap	1100	62.4	1763	62.4	1763
255.vortex	1900	74.7	2542	74.7	2542
256.bzip2	1500	139	1083	139	1083
300.twolf	3000	191	1571	192	1563

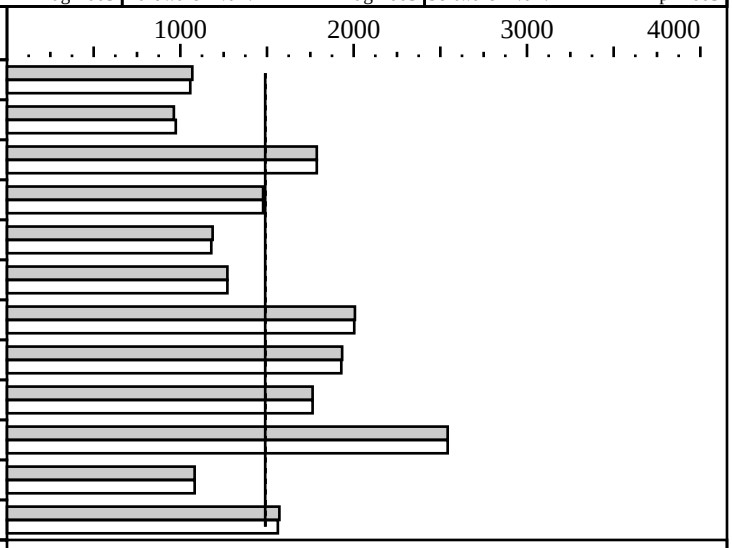

Hardware

CPU:	Intel Pentium D 840 Processor (3.2GHz, 800 MHz bus)
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD/core on chip
Secondary Cache:	1024KB/core on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 X 1024MB DDR2-667 ECC Unbuffered
Disk Subsystem:	1 X IDE Maxtor DiamondMax Plus 9 250GB
Other Hardware:	N/A

Software

Operating System:	Windows 2003 Enterprise Server
Compiler:	Intel C++ Compiler 9.0 Build 20050430Z (32-bit) Microsoft Visual Studio .Net 2003(for libraries) SmartHeap Library Version 7.4 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:   Approved stdcpp src.alt used
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro
PDSM4/E Motherboard

SPECint2000 = 1490
SPECint_base2000 = 1492

SPEC license #01176 | Tested by: Supermicro | Test date: Aug-2005 | Hardware Avail: Aug-2005 | Software Avail: Apr-2005

Notes/Tuning Information (Continued)

256.bzip2: -fast -Oa -Qunroll1 +FDO
300.twolf: -fast -O3 +FDO shlW32M.lib
New 32-bt Windows tools used, approved in May-2005
Tested system was built with 2U SC823S-R500LP Chassis. For a general system, a 420W (minimum) ATX12V power supply [4-pin +12V AND 24-pin is recommended to assure system stability].
Product description located as of:
http://www.supermicro.com/products/motherboard/DualCore/E7230/PDSM4.cfm
The system bus runs at 800MHz