CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

TYAN Tomcat K8E (S2865), AMD Opteron (TM) 154

SPECint2000 = 1956

SPECint_base2000 = 1837

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: Jun-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	91.0	1539	91.0	1539
175.vpr	1400	91.9	1523	89.2	1570
176.gcc	1100	53.6	2054	53.1	2073
181.mcf	1800	151	1192	123	1466
186.crafty	1000	54.6	1832	49.4	2025
197.parser	1800	103	1756	102	1760
252.eon	1300	49.6	2623	43.1	3018
253.perlbmk	1800	95.0	1895	95.0	1895
254.gap	1100	56.8	1938	56.8	1938
255.vortex	1900	65.3	2910	59.6	3190
256.bzip2	1500	102	1476	100	1494
300.twolf	3000	156	1929	132	2265

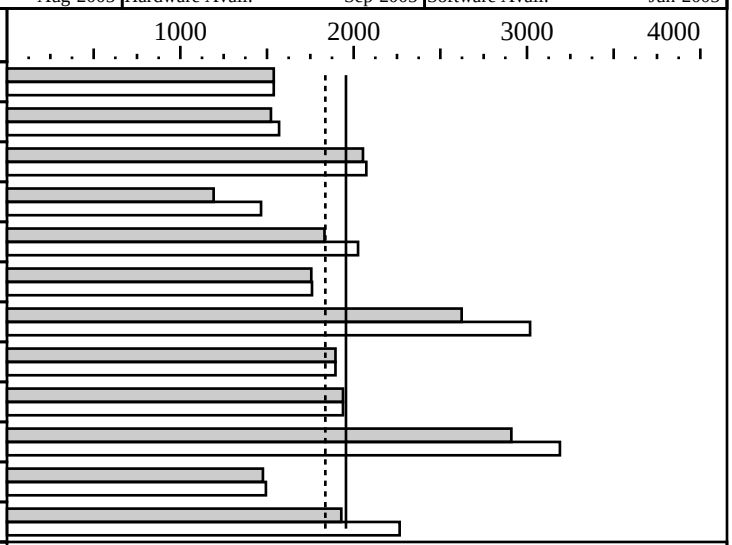

Hardware

CPU:	AMD Opteron (TM) 154 (939-pin)
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512 MB, DDR400 CL2.0
Disk Subsystem:	SATA, Western Digital WD740GD, 10000 rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows XP Pro SP2
Compiler:	Intel C++ 8.0 build 20040415Z for IA32 Microsoft Visual Studio .NET 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V7.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
  176.gcc:      -Dalloca=_alloca /F10000000
  186.crafty:   -DNT_i386
  253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -fast -arch:SSE2 -Oi- +FDO
Baseline C++: -fast -arch:SSE2 -GX -GR
Peak Tuning:
164.gzip:     basepeak=yes
175.vpr:      -fast -arch:SSE2 +FDO
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
176.gcc:      -fast -arch:SSE2 +FDO -Oi- -Qunroll3
181.mcf:      -fast -QaxN      +FDO
186.crafty:   -fast -arch:SSE2 +FDO
197.parser:         -arch:SSE2 +FDO -Oi- -Qipo
252.eon:      -fast -arch:SSE2 +FDO -Qansi_alias
             -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
253.perlbmk:  basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 254.gap:      basepeak=yes
 255.vortex:   -fast -arch:SSE  +FDO -Oi- shlW32M.lib
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 256.bzip2:    -fast                        -Qunroll2
 300.twolf:    -fast -arch:SSE2 +FDO        -Qunroll3 shlW32M.lib -Qansi_alias
The tested system can be assembled using a standard ATX case and an Antec True 550
Watt EPS12V power supply.
All memory slots were populated with Corsair CMX512-3200XL.
Memory timings manually set in BIOS: CAS=2, TRCD=2, TRAS=5, TRP=2
BIOS V2.00b
```