CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

H8DSR-8 Motherboard (AMD Opteron (TM) 256)

SPECint2000 = 2012

SPECint_base2000 = 1782

SPEC license #01176 | Tested by: Supermicro | Test date: Apr-2006 | Hardware Avail: Apr-2006 | Software Avail: Oct-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	96.9	1444	85.2	1643
175.vpr	1400	111	1260	89.5	1564
176.gcc	1100	72.8	1511	51.0	2156
181.mcf	1800	153	1176	122	1478
186.crafty	1000	49.8	2010	47.6	2100
197.parser	1800	98.5	1827	99.1	1816
252.eon	1300	47.0	2764	42.2	3078
253.perlbmk	1800	83.0	2170	81.3	2215
254.gap	1100	56.6	1943	56.6	1943
255.vortex	1900	70.0	2713	65.7	2893
256.bzip2	1500	98.7	1520	96.5	1554
300.twolf	3000	168	1790	126	2373

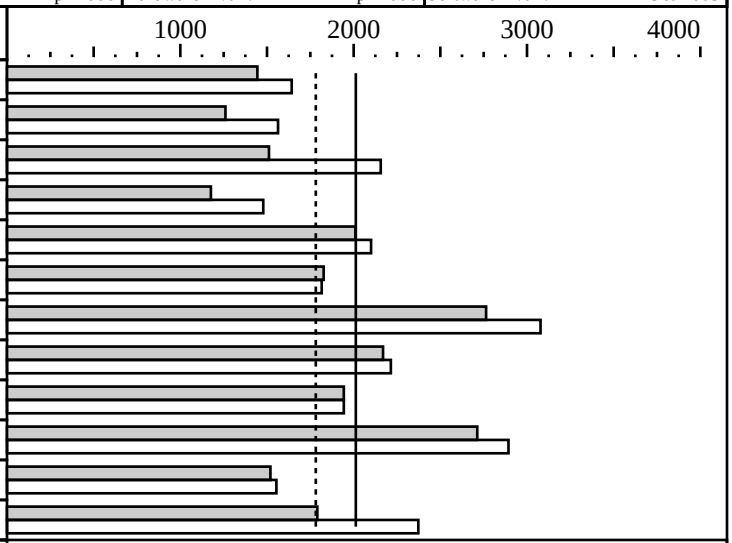

Hardware

CPU:	AMD Opteron (TM) 256
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	no
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 X Apacer 78.A1071.404, 2GB DDR-400 CL3 ECC Reg
Disk Subsystem:	1 X IDE, Seagate ST3250823A 250GB
Other Hardware:	None

Software

Operating System:	Windows server 2003 Enterprise Edition 32-bit Version w/ Service Pack 1
Compiler:	Intel C++ 9.0 build 20050912Z for IA32 Microsoft Visual Studio .NET 2003 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V7.0 from MicroQuill (www.microquill.com)
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
  176.gcc:      -Dalloca=_alloca /F10000000
  186.crafty:   -DNT_i386
  253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -O3 -Qipo -Op +FDO
Baseline C++: -O3 -Qipo -Qcxx-features +FDO
Peak Tuning:
 164.gzip:     -O3 -Qipo -QxW +FDO
 175.vpr:      -O3 -Qipo -QxW +FDO
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 176.gcc:      -O3 -Qipo -QxW -Oi- -Qunroll3 +FDO
 181.mcf:      -O3 -Qipo -QaxN      +FDO
 186.crafty:   -O3 -Qipo -QxW +FDO
 197.parser:         -QxW +FDO -Oi- -Qipo
 252.eon:      -O3 -Qipo -QxW +FDO -Qansi_alias
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 253.perlbmk:  -O3 -Qipo -QxW +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
254.gap:      -O3 -Qipo -QxW +FDO
255.vortex:   -O3 -Qipo -arch:SSE  +FDO -Oi- shlW32M.lib
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
256.bzip2:    -O3 -Qipo               -Qunroll2
300.twolf:    -O3 -Qipo -QxW +FDO      -Qunroll3 shlW32M.lib -Qansi_alias
Tested systm was built with chassis SC813S+-500,
Product description located as of:
http://www.supermicro.com/Aplus/motherboard/Opteron/HT2000/H8DSR-8.cfm
To ensure system stability, a 600W (minimum) ATX power supply [8-pin (+12V) and (20+4)-pin are required] ) and 24-pin are required]
Other Configuration Notes
The start /b /wait /affinity command is used to bind CPU(s) to processes.
```